

## Multicast and Anycast

Mike Freedman  
COS 461: Computer Networks

<http://www.cs.princeton.edu/courses/archive/spr14/cos461/>

**Perspectives on the Internet and its Evolution.**


Duet Speakers: Vinton Cerf, Robert Kahn.

March 12th, 2014  
4:30-5:30 PM

Friend Center 101, Princeton University





Reception in Convocation Room afterwards  
Free and open to the general public. Seating starts at 4 PM

TODAY



## Outline today

- **IP Anycast**
  - N destinations, 1 should receive the message
  - Providing a service from multiple network locations
  - Using routing protocols for automated failover
- **Multicast protocols**
  - N destinations, N should receive the message
  - Examples
    - IP Multicast
    - SRM (Scalable Reliable Multicast)
    - PGM (Pragmatic General Multicast)

<b>unicast</b>	<b>anycast</b>
	
<b>broadcast</b>	<b>multicast</b>
	

<http://en.wikipedia.org/wiki/Multicast>

### Limitations of DNS-based failover


- Failover/load balancing via multiple A records
 

```
;; ANSWER SECTION:
www.cnn.com. 300 IN A 157.166.255.19
www.cnn.com. 300 IN A 157.166.224.25
www.cnn.com. 300 IN A 157.166.226.26
www.cnn.com. 300 IN A 157.166.255.18
```
- If server fails, service unavailable for TTL
  - Very low TTL: Extra load on DNS
  - Anyway, browsers cache DNS mappings ☹
- What if root NS fails? All DNS queries take > 3s?


### Motivation for IP anycast





- Failure problem: client has resolved IP address
  - What if IP address can represent many servers?
- Load-balancing/failover via IP addr, rather than DNS
- IP anycast is simple reuse of existing protocols
  - Multiple instances of a service share same IP address
  - Each instance announces IP address / prefix in BGP / IGP
  - Routing infrastructure directs packets to nearest instance of the service
    - Can use same selection criteria as installing routes in the FIB
  - No special capabilities in servers, clients, or network

### IP anycast in action

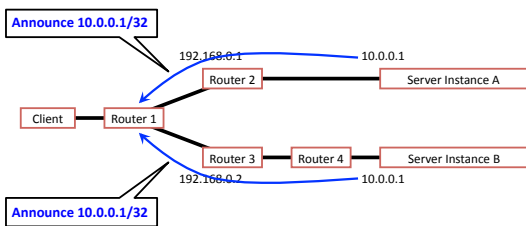


### IP anycast in action

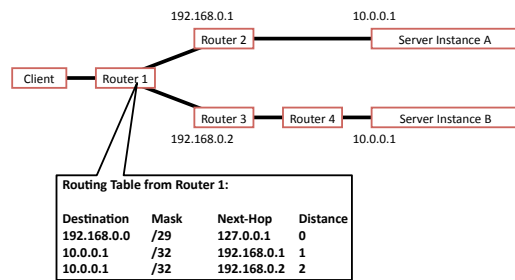

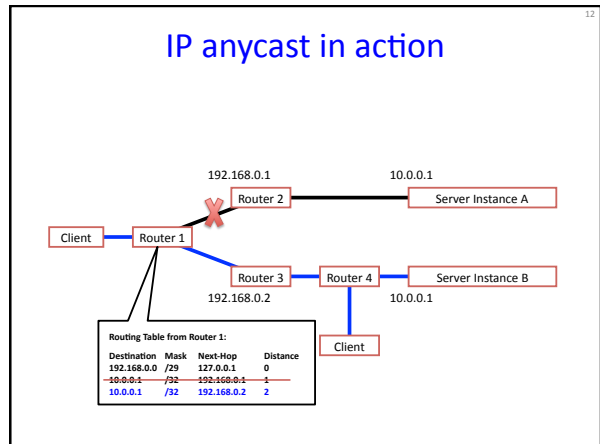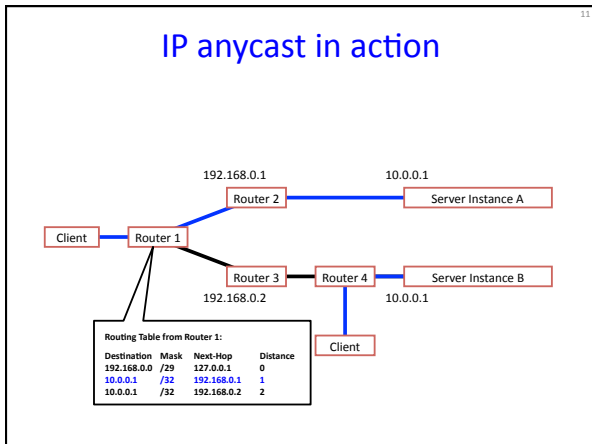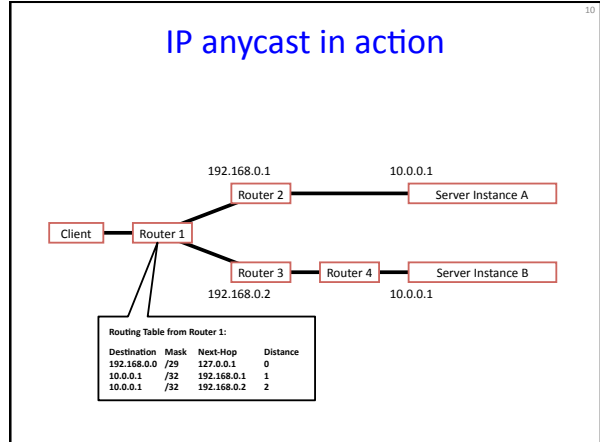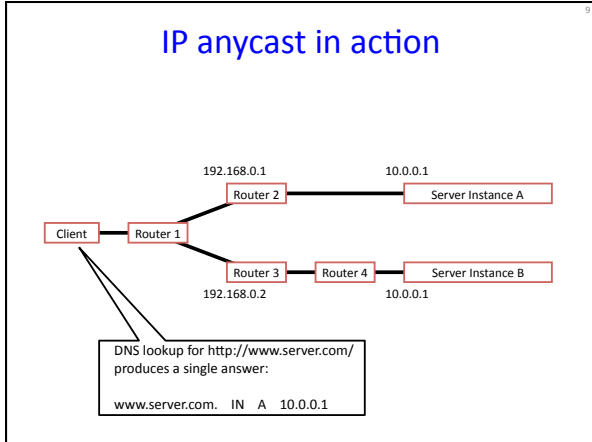

## IP anycast in action

From client/router perspective, topology could as well be:

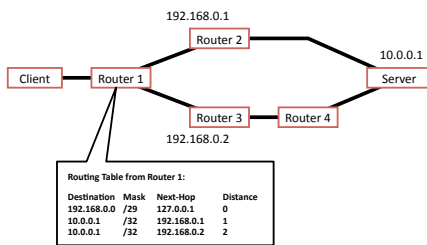

## Downsides of IP anycast

- Many Tier-1 ISPs ingress filter prefixes > /24
  - Publish a /24 to get a “single” anycasted address: Poor utilization
- Scales poorly with the # anycast groups
  - Each group needs entry in global routing table
- Not trivial to deploy
  - Obtain an IP prefix and AS number; speak BGP

## Downsides of IP anycast


- Subject to the limitations of IP routing
  - No notion of load or other application-layer metrics
  - Convergence time can be slow (as BGP or IGP converge)
- Failover doesn't really work with TCP
  - TCP is stateful: if switch destination replicas, other server instances will just respond with RSTs
  - May react to network changes, even if server online
- Root nameservers (UDP) are anycasted, little else

## Multicast

## Multicast

- **Many receivers**
  - Receiving the same content
- **Applications**
  - Video conferencing
  - Online gaming
  - IP television (IPTV)
  - Financial data feeds


**multicast**



## Iterated Unicast

- **Unicast message to each recipient**
- **Advantages**
  - Simple to implement
  - No modifications to network
- **Disadvantages**
  - High overhead on sender
  - Redundant packets on links
  - Sender must maintain list of receivers

**unicast**



## IP Multicast



- **Embed receiver-driven tree in network layer**
  - Sender sends a single packet to the group
  - Receivers “join” and “leave” the tree
- **Advantages**
  - Low overhead on the sender
  - Avoids redundant network traffic
- **Disadvantages**
  - Control-plane protocols for multicast groups
  - Overhead of duplicating packets in the routers

**multicast**



## Multicasting messages

- **Simple application multicast: Iterated unicast**
  - Client simply unicasts message to every recipient
  - **Pros:** simple to implement, no network modifications
  - **Cons:**  $O(n)$  work on sender, network
- **Advanced overlay multicast (“peer-to-peer”)**
  - Build receiver-driven tree
  - **Pros:** Scalable, no network modifications
  - **Cons:**  $O(\log n)$  work on sender, network; complex to implement
- **IP multicast**
  - Embed receiver-driven tree in network layer
  - **Pros:**  $O(1)$  work on client,  $O(\# \text{ receivers})$  on network
  - **Cons:** requires network modifications; scalability concerns?

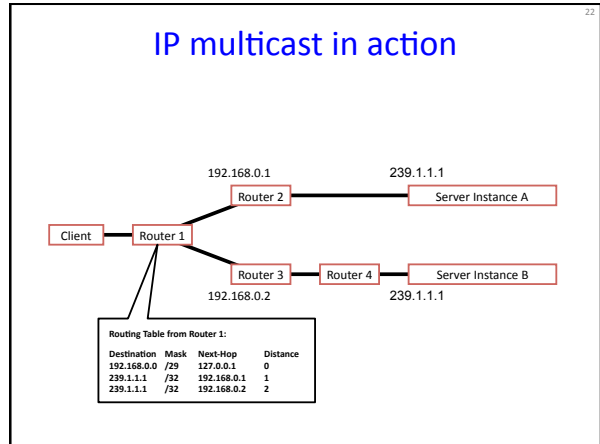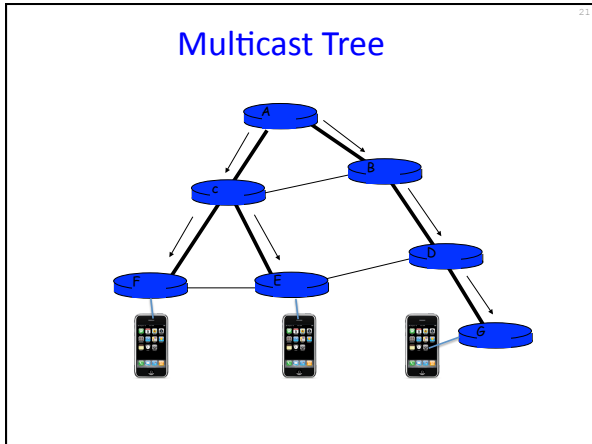


- ### Single vs. Multiple Senders
- **Source-based tree**
    - Separate tree for each sender
    - Tree is optimized for that sender
    - But, requires multiple trees for multiple senders
  - **Shared tree**
    - One common tree
    - Spanning tree that reaches all participants
    - Single tree may be inefficient
    - But, avoids having many different trees

- ### Multicast Addresses
- **Multicast “group” defined by IP address**
    - Multicast addresses look like unicast addresses
    - 224.0.0.0 to 239.255.255.255
  - **Using multicast IP addresses**
    - Sender sends to the IP address
    - Receivers join the group based on IP address
    - Network sends packets along the tree

## Example Multicast Protocol

- Receiver sends a “join” messages to the sender
  - And grafts to the tree at the nearest point

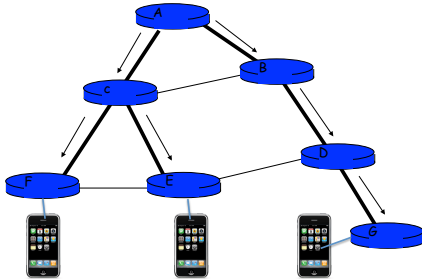

## IGMP v1

- Two types of IGMP msgs (both have IP TTL of 1)
  - **Host membership query:** Routers query local networks to discover which groups have members
  - **Host membership report:** Hosts report each group (e.g., multicast addr) to which belong, by broadcast on net interface from which query was received
- Routers maintain group membership
  - Host sends an IGMP “report” to join a group
  - Multicast routers periodically issue host membership query to determine liveness of group members
  - Note: No explicit “leave” message from clients

## IGMP: Improvements


- IGMP v2 added:
  - If multiple routers, one with lowest IP elected querier
  - Explicit leave messages for faster pruning
  - Group-specific query messages
- IGMP v3 added:
  - **Source filtering:** Join specifies multicast “only from” or “all but from” specific source addresses

## IGMP: Parameters and Design

- Parameters
  - Maximum report delay: 10 sec
  - Membership query internal default: 125 sec
  - Time-out interval: 270 sec = 2 \* (query interval + max delay)
- Router tracks each attached network, not each peer
- Should clients respond immediately to queries?
  - Random delay (from 0..D) to minimize responses to queries
  - Only one response from single broadcast domain needed
- What if local networks are layer-2 switched?
  - L2 switches typically broadcast multicast traffic out all ports
  - Or, IGMP snooping (sneak peek into layer-3 contents), Cisco’s proprietary protocols, or static forwarding tables

## IP Multicast is Best Effort

- Sender sends packet to IP multicast address
  - Loss may affect multiple receivers

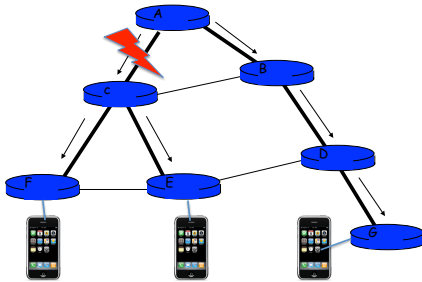

## Challenges for Reliable Multicast

- Send an ACK, much like TCP?
  - ACK-implosion if all destinations ACK at once
  - Source does not know # of destinations
- How to retransmit?
  - To all? One bad link effects entire group
  - Only where losses? Loss near sender makes retransmission as inefficient as replicated unicast
- Negative acknowledgments more common

## Scalable Reliable Multicast

- Data packets sent via IP multicast
  - Data includes sequence numbers
- Upon packet failure
  - If failures relatively rare, use Negative ACKs (NAKs) instead: “Did not receive expected packet”
  - Sender issues heartbeats if no real traffic. Receiver knows when to expect (and thus NAK)

## Handling Failure in SRM

- Receiver multicasts a NAK
  - Or send NAK to sender, who multicasts confirmation
- Scale through NAK suppression
  - If received a NAK or NCF, don't NAK yourself
  - Add random delays before NAK'ing
- Repair through packet retransmission
  - From initial sender
  - From designated local repairer



## Pragmatic General Multicast (RFC 3208)

- **Similar approach as SRM: IP multicast + NAKs**
  - ... but more techniques for scalability
- **Hierarchy of PGM-aware network elements**
  - **NAK suppression:** Similar to SRM
  - **NAK elimination:** Send at most one NAK upstream
    - Or completely handle with local repair!
  - **Constrained forwarding:** Repair data can be suppressed downstream if no NAK seen on that port
  - **Forward-error correction:** Reduce need to NAK
- **Works when only sender is multicast-able**

## Outline today

- **IP Anycast**
  - N destinations, 1 should receive the message
  - Providing a service from multiple network locations
  - Using routing protocols for automated failover
- **Multicast protocols**
  - N destinations, N should receive the message
  - Examples
    - IP Multicast and IGMP
    - SRM (Scalable Reliable Multicast)
    - PGM (Pragmatic General Multicast)