




Datacenter Networks

Lecture 22

COS 461: Computer Networks

Kyle Jamieson

Networking Case Studies

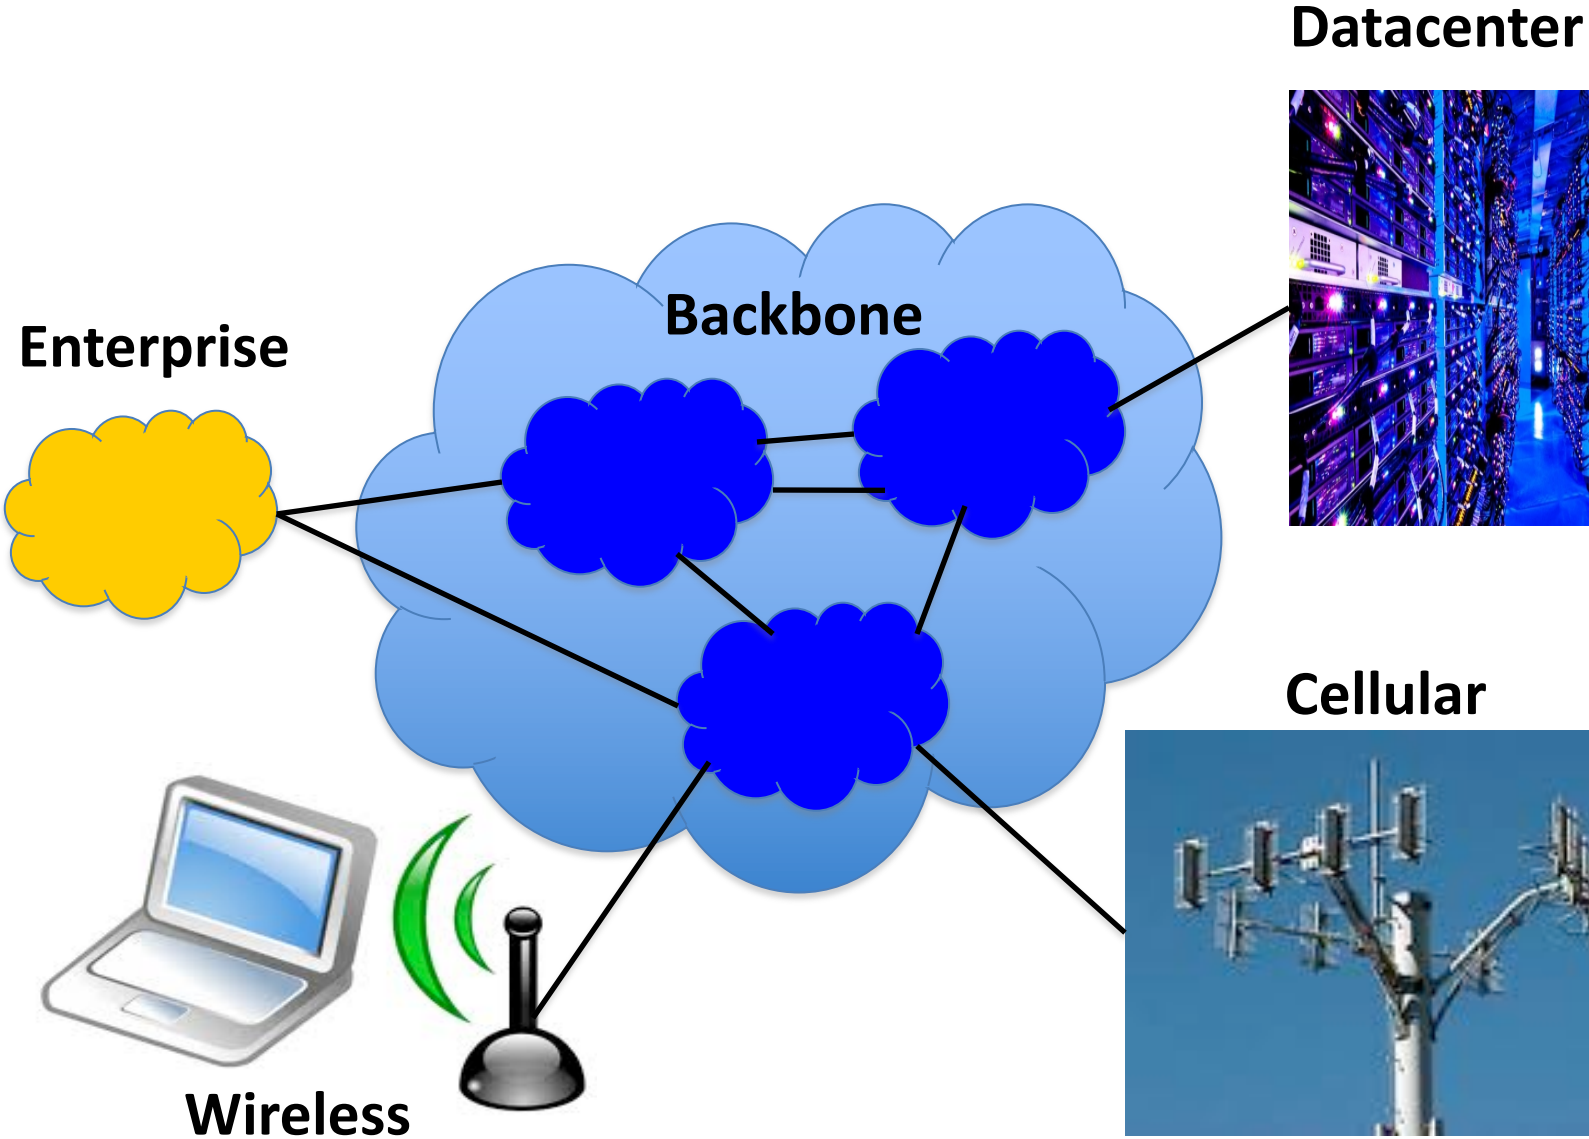

Cloud Computing

Cloud Computing

- Demand-elastic resources
 - Expand & contract resources as demand dictates
 - Pay-per-use; Infrastructure on demand
- Multi-tenancy
 - Multiple independent users
 - Security and resource isolation
 - Amortize the (shared) infrastructure cost
 - Flexible service management


Cloud Service Models

- **Software as a Service**
 - Provider licenses applications to users as a service
 - e.g., customer relationship management, e-mail, ..
 - Avoid costs of installation, maintenance, patches
- **Platform as a Service**
 - Provider offers platform for building applications
 - E.g., Google's App-Engine, Amazon S3 storage
 - Avoid worrying about scalability of platform

Cloud Service Models

- **Infrastructure as a Service**
 - Provider offers raw computing, storage, and network
 - E.g., Amazon's Elastic Computing Cloud (EC2)
 - Avoid buying servers & estimating resource needs

Enabling Technology: Virtualization

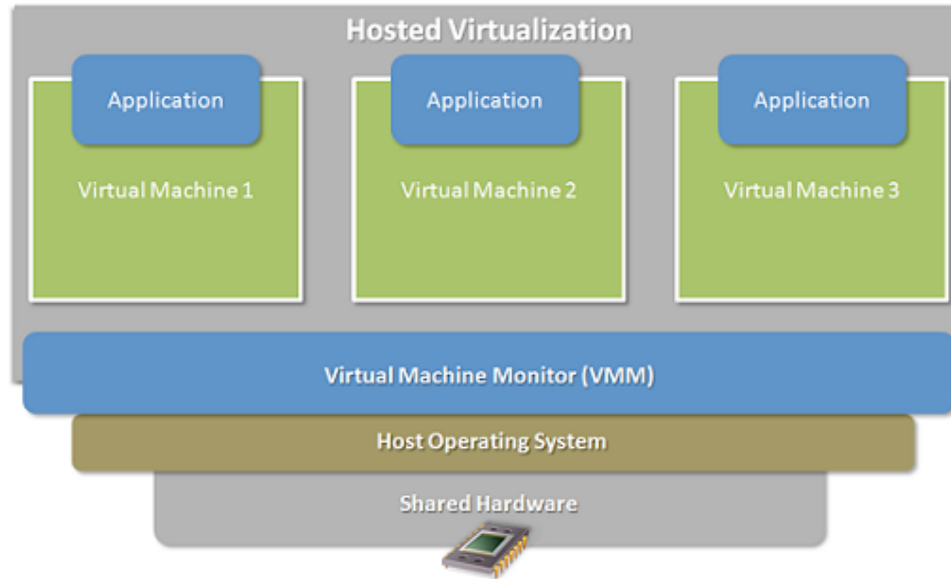

- Multiple virtual machines on one physical machine
- Applications run unmodified as on real machine
- Recently: Lighter-weight virtualization through "containers"
- Can migrate from one machine to another
- Autoscale by spinning up/down VMs & containers


Multi-Tier Applications

- Applications consist of tasks
 - Many separate components
 - Running on different machines
- Commodity computers
 - Many general-purpose computers
 - Not one big mainframe
 - Easier scaling


Componentization leads to different types of network traffic

- "North-South traffic"
 - Traffic to/from external clients (outside of datacenter)
 - Handled by front-end (web) servers, mid-tier application servers, and back-end databases
 - Traffic patterns fairly stable, though diurnal variations
- "East-West traffic"
 - Traffic within data-parallel computations within datacenter (e.g. "Partition/Aggregate" programs like Map Reduce)
 - Data in distributed storage, partitions transferred to compute nodes, results joined at aggregation points, written back to storage
 - Traffic may shift on small timescales (e.g., minutes)

North-South Traffic

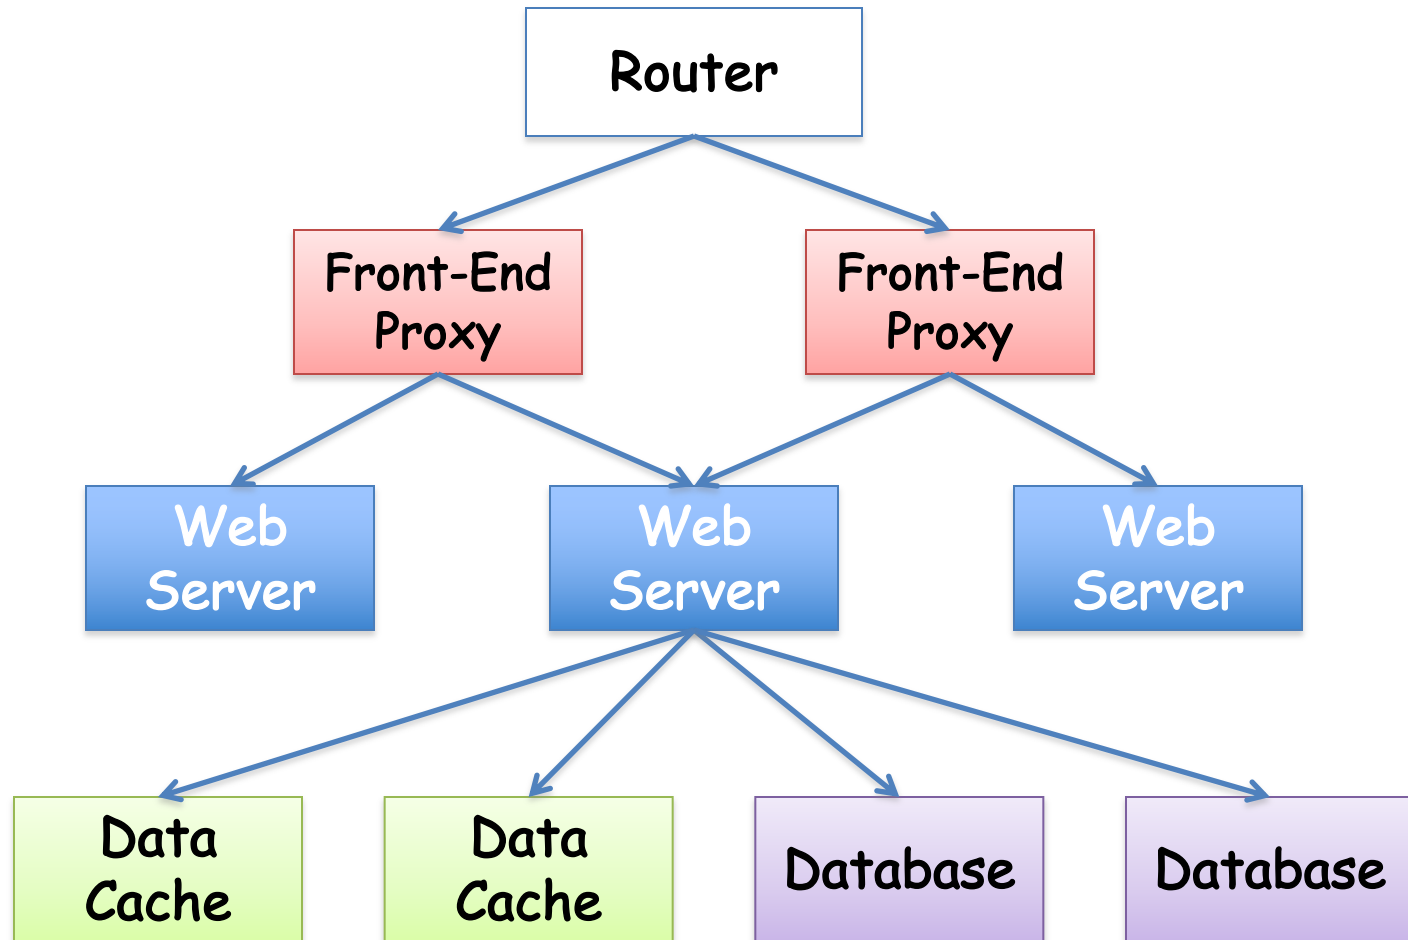

East-West Traffic

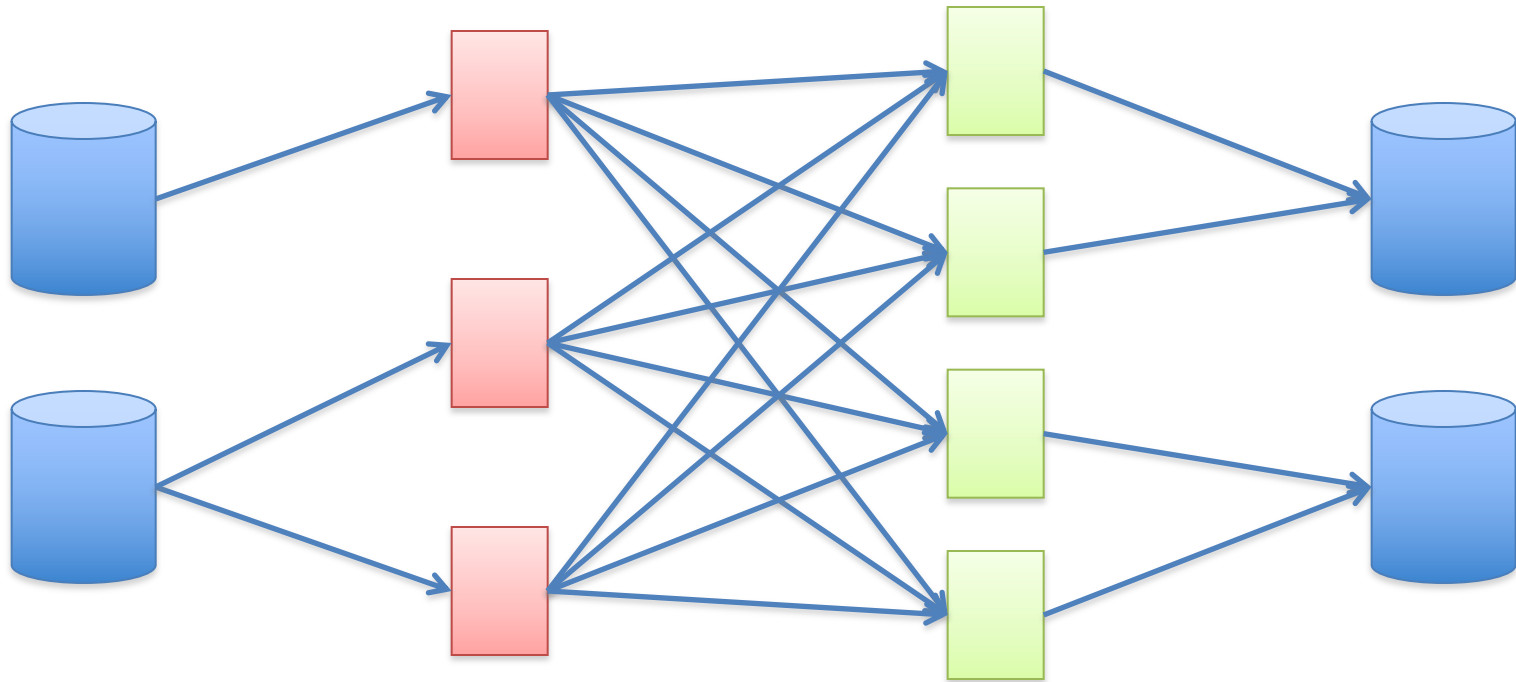

**Distributed
Storage**


**Map
Tasks**

**Reduce
Tasks**

**Distributed
Storage**


Datacenter Network

Virtual Switch in Server

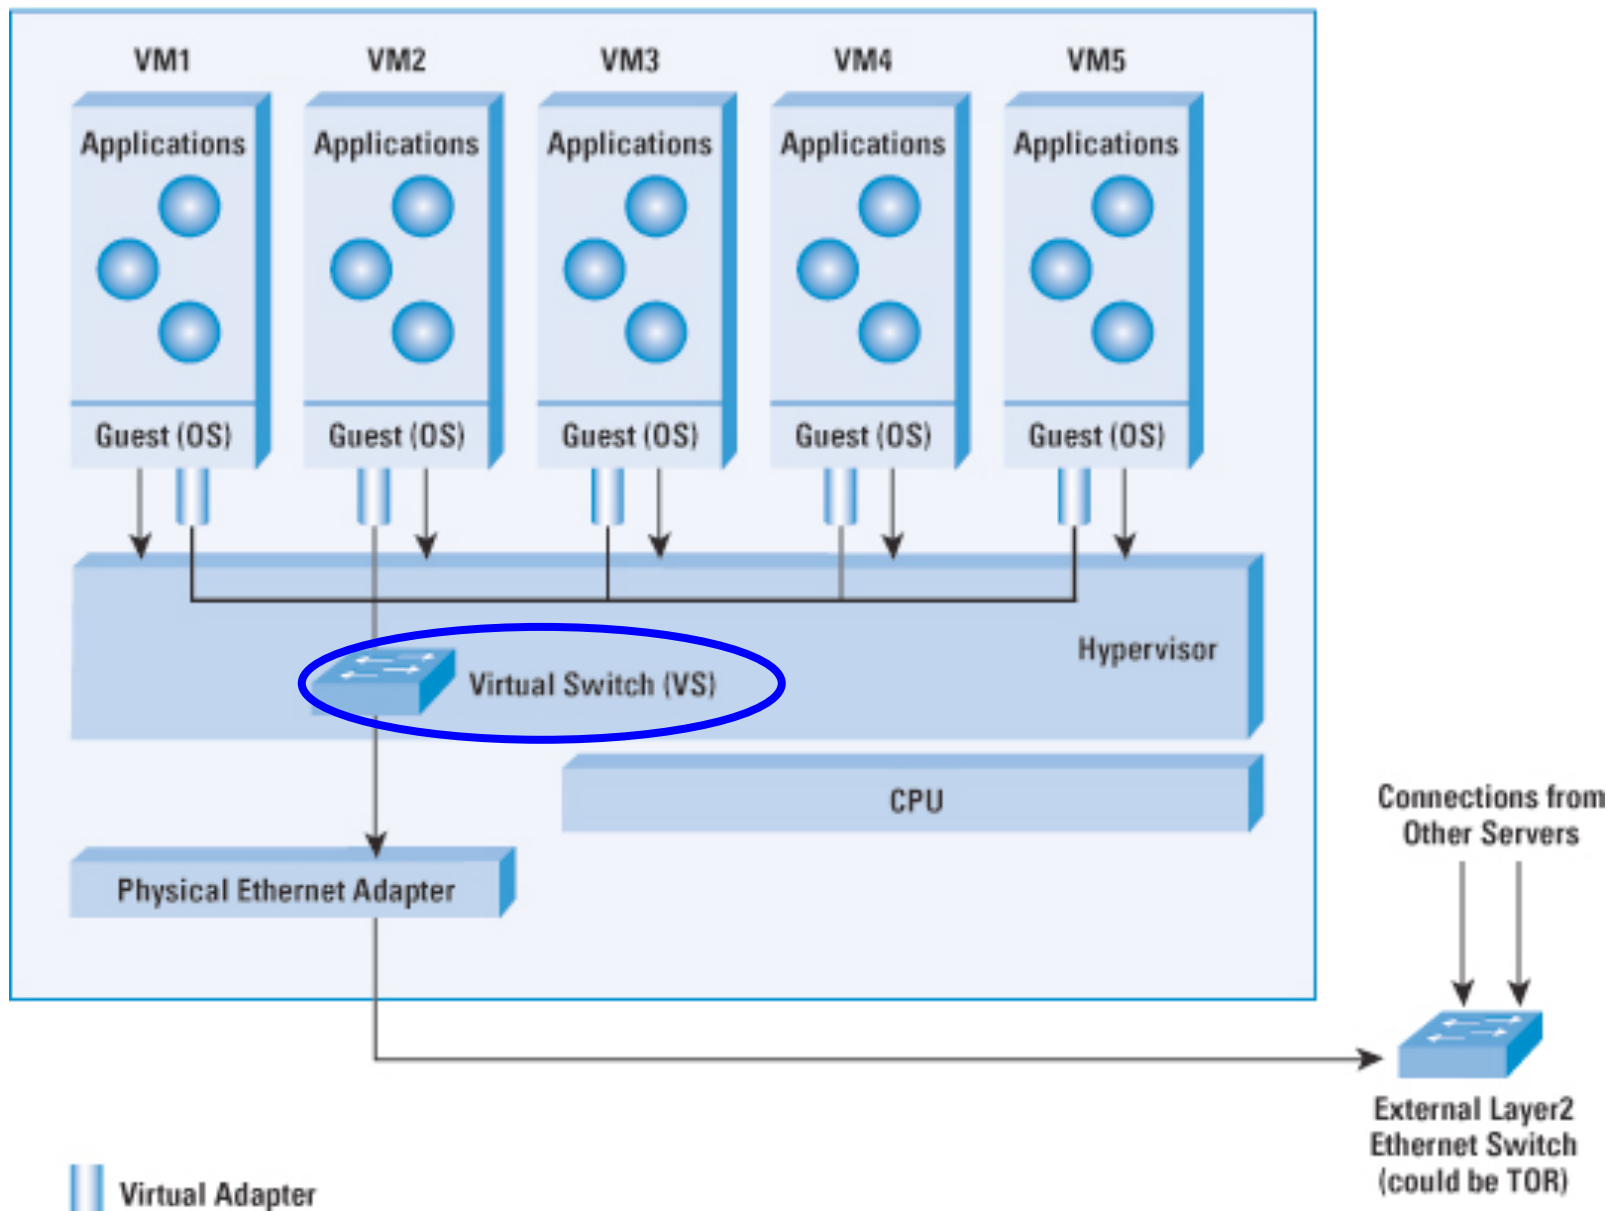


Top-of-Rack Architecture

- **Rack of servers**
 - Commodity servers
 - And top-of-rack switch
- **Modular design**
 - Preconfigured racks
 - Power, network, and storage cabling

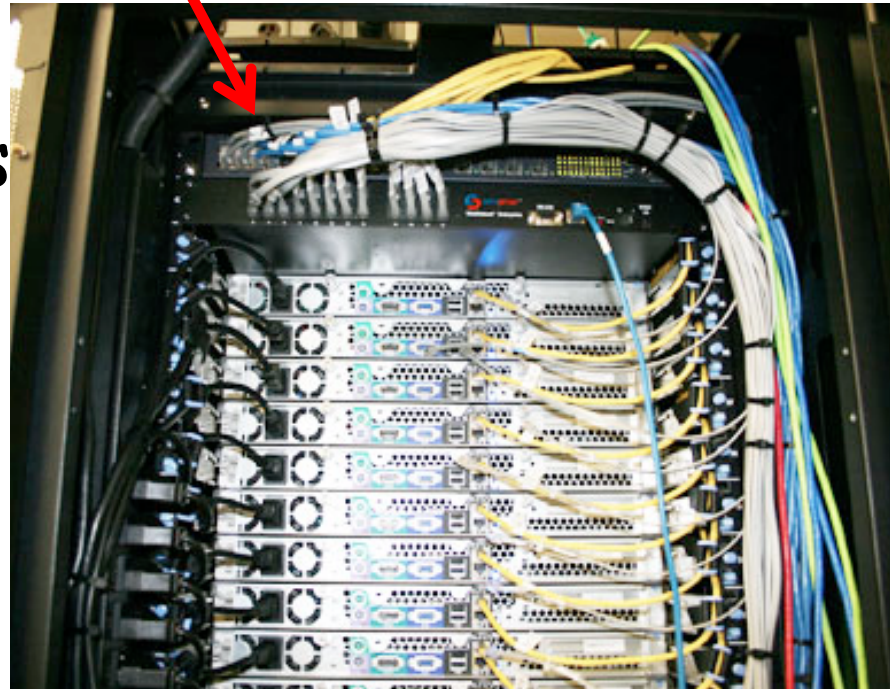


Aggregate to the Next Level

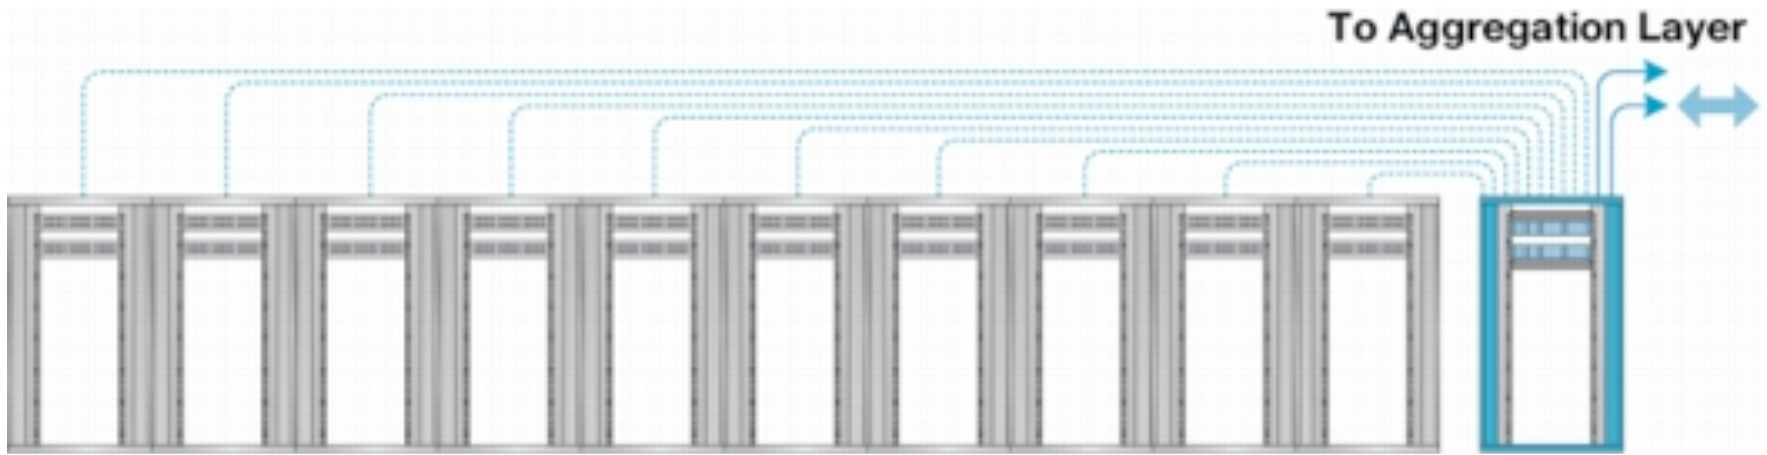


Datacenter Network Topology

Internet

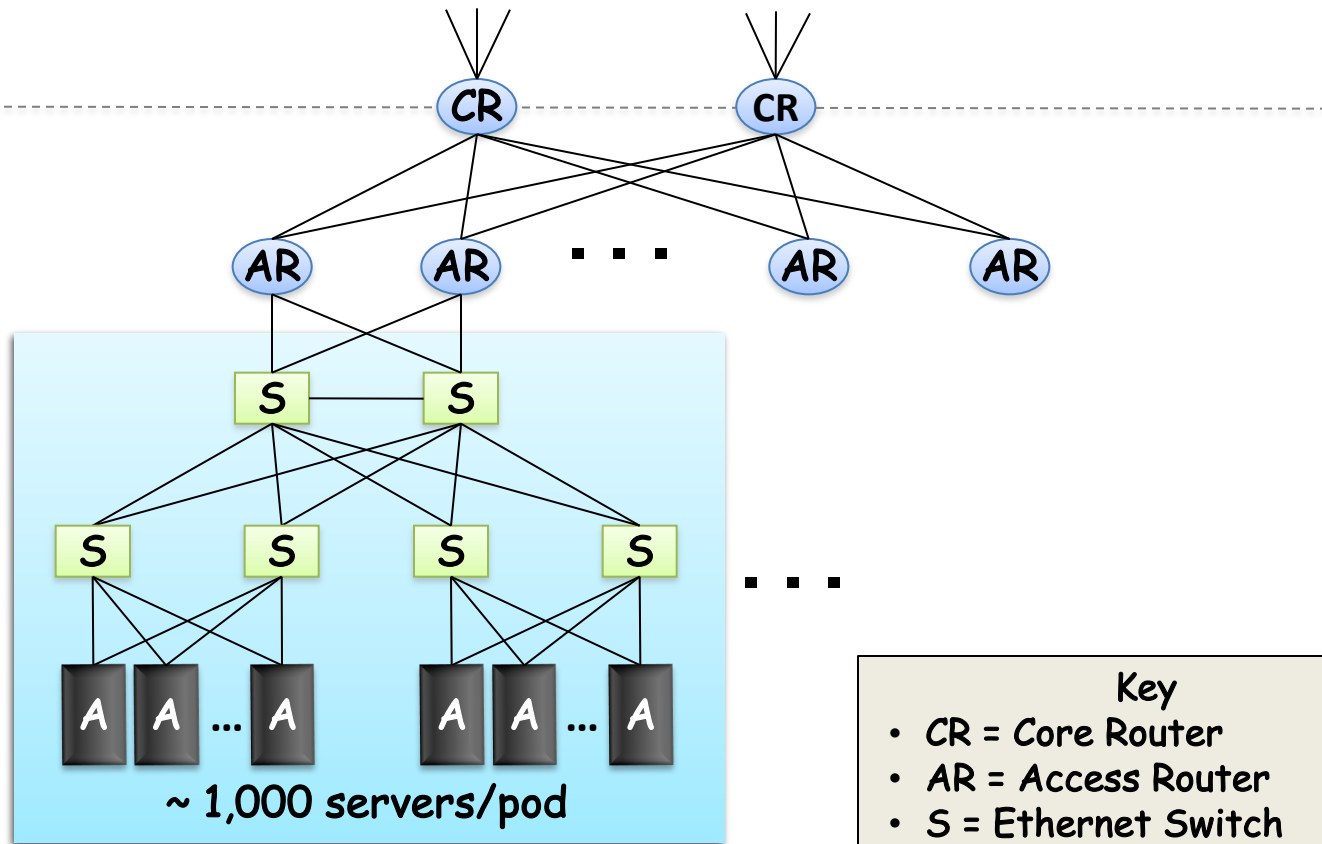


- Key**
- CR = Core Router
 - AR = Access Router
 - S = Ethernet Switch
 - A = Rack of app. servers

Capacity Mismatch?

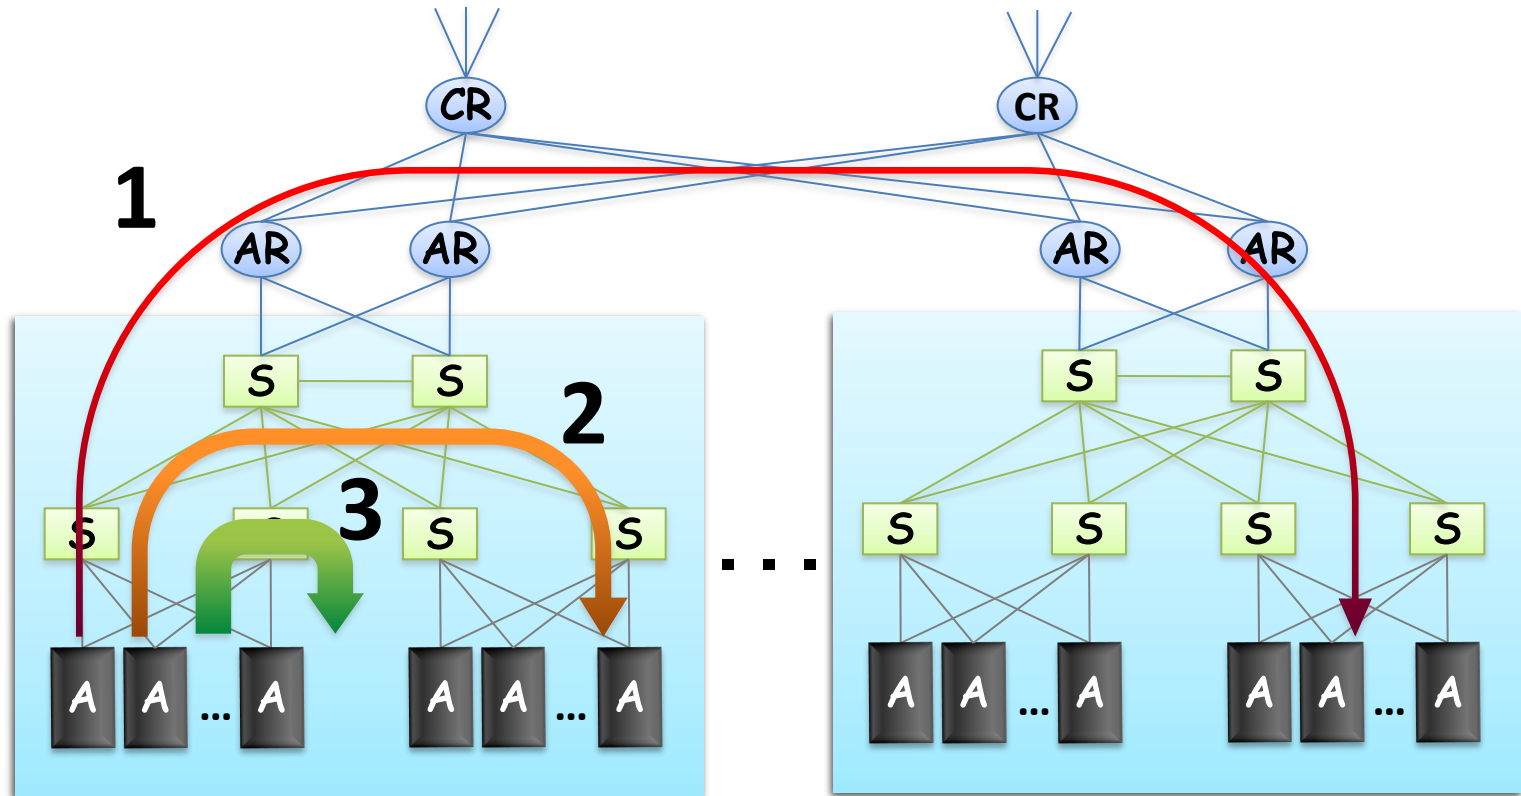


“Oversubscription”:
Much more demand vs. supply for higher links

Capacity Mismatch!

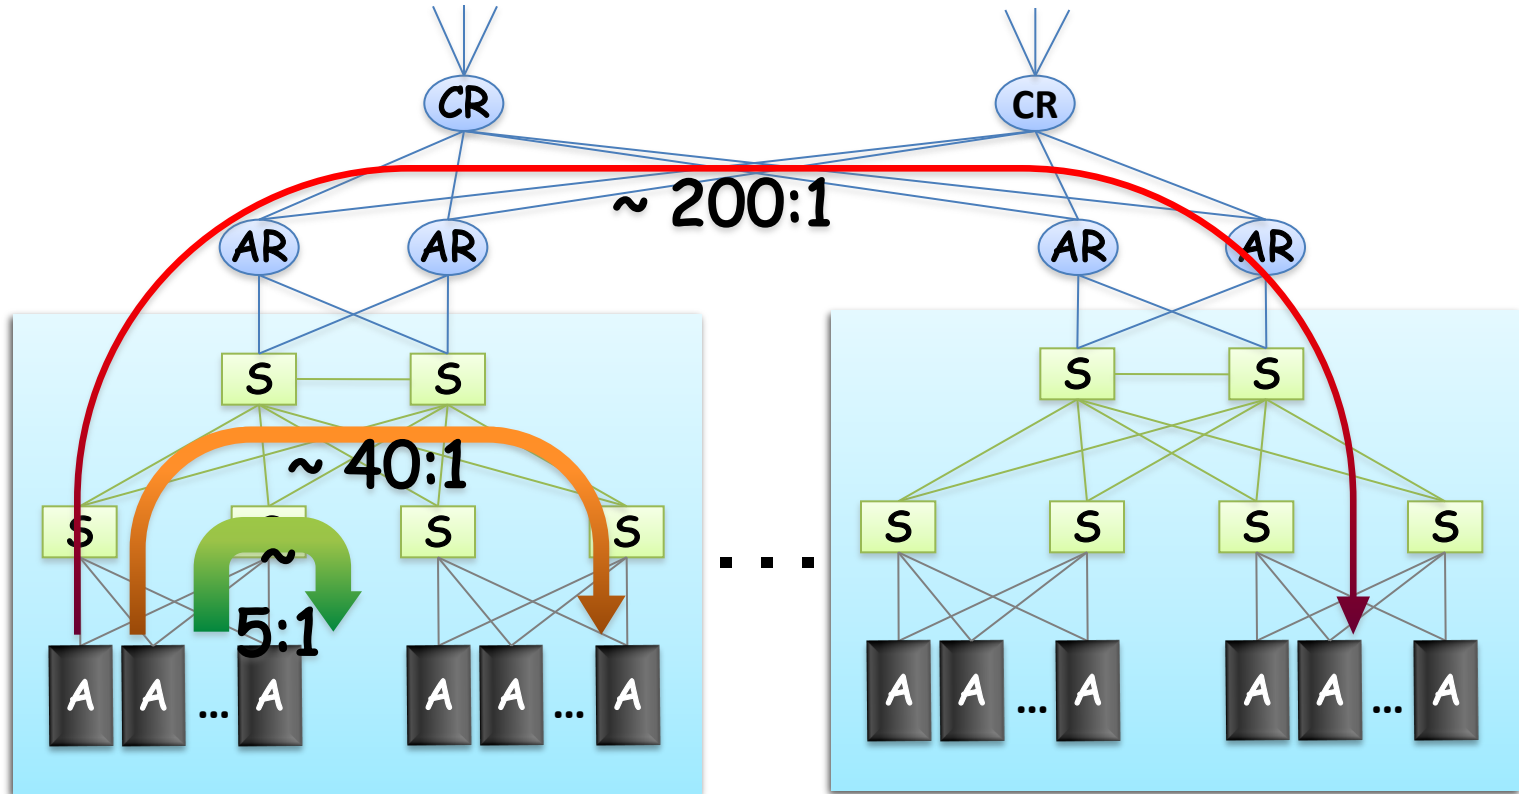


Particularly bad for east-west traffic

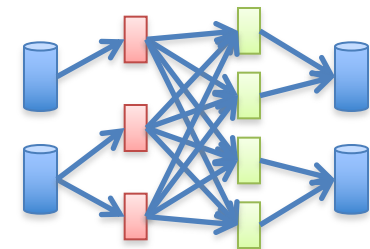

Layer 2 vs. Layer 3?


- Ethernet switching (layer 2)
 - Cheaper switch equipment
 - Fixed addresses and auto-configuration
 - Seamless mobility, migration, and failover
- IP routing (layer 3)
 - Scalability through hierarchical addressing
 - Efficiency through shortest-path routing
 - Multipath routing through equal-cost multipath

Datacenter Routing

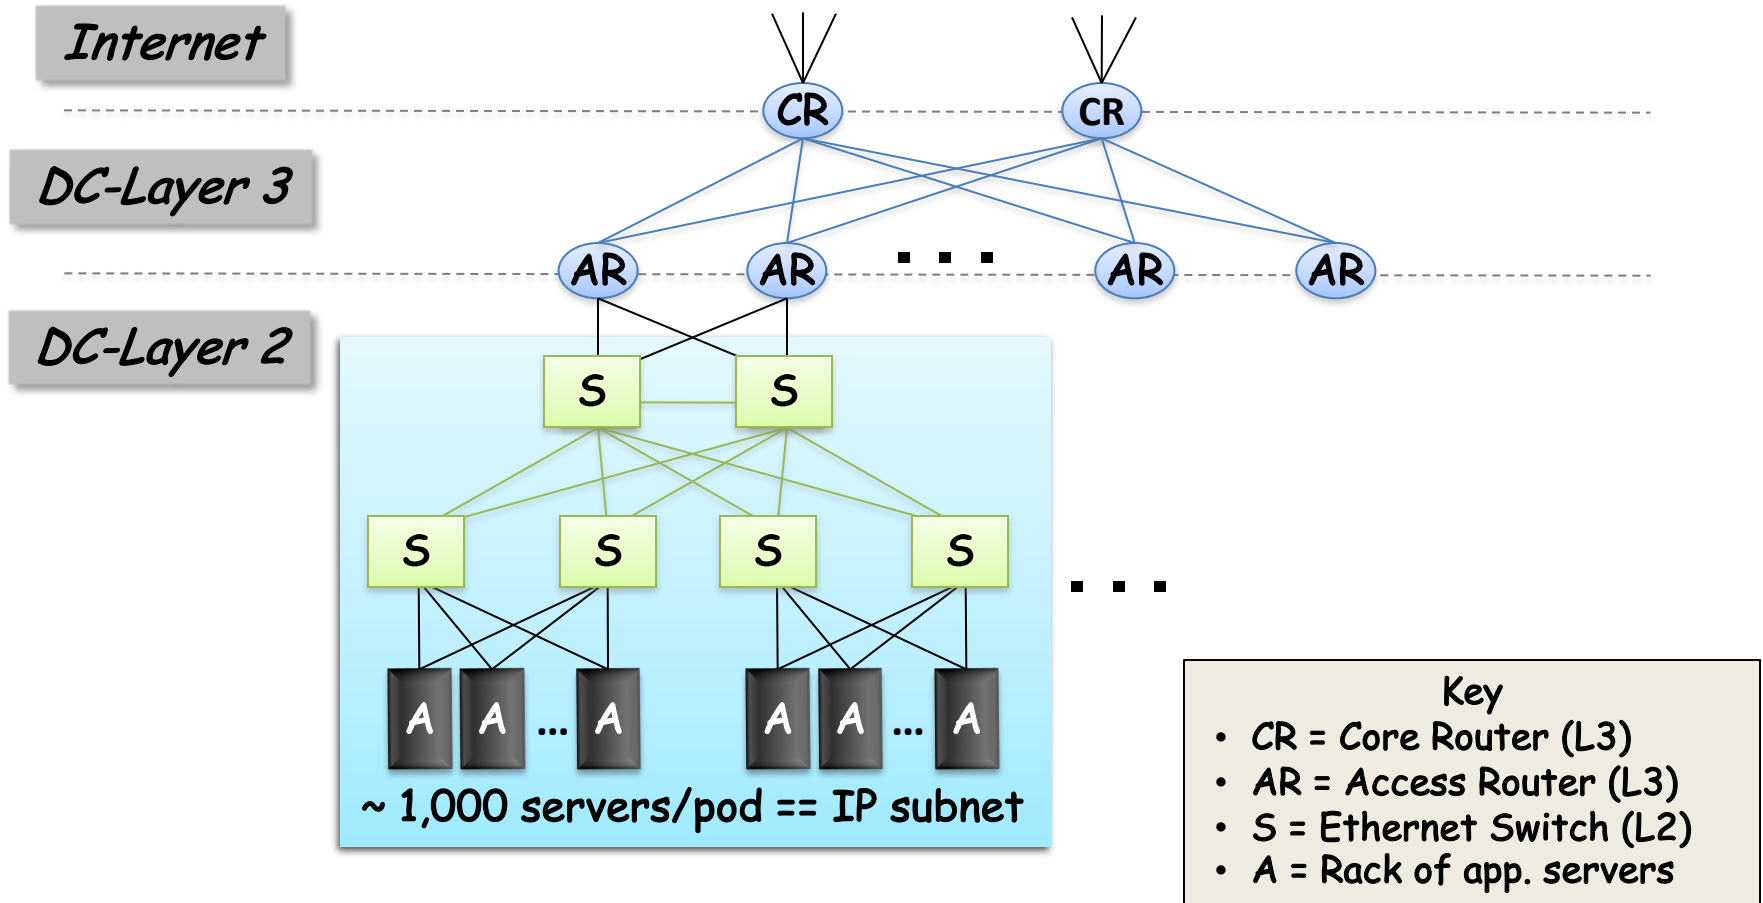


New datacenter networking
problems have emerged...

Network Incast

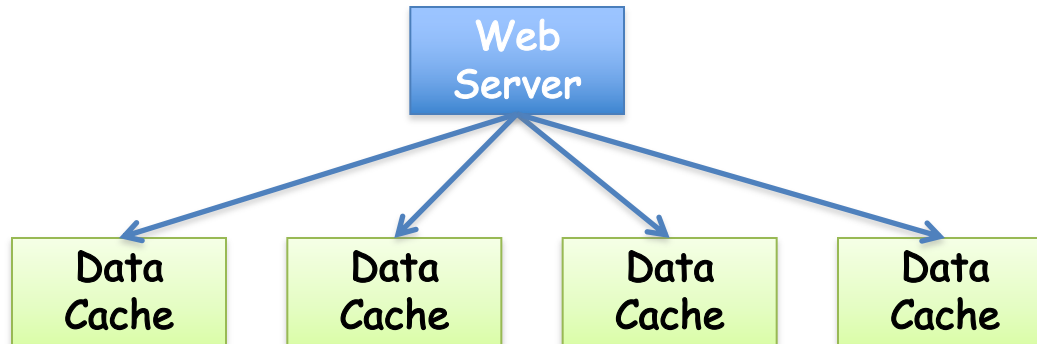

- **Incast arises from synchronized parallel requests**
 - Web server sends out parallel request ("which friends of Johnny are online?")
 - Nodes reply at same time, cause traffic burst
 - Replies potentially exceed switch's buffer, causing drops

Network Incast

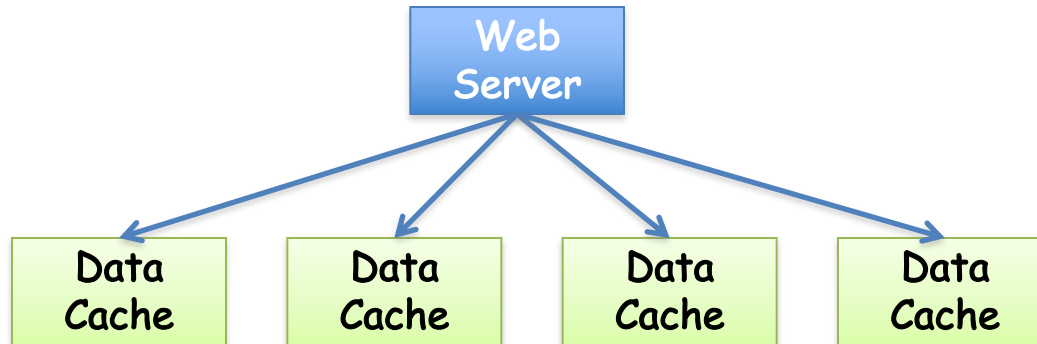

Solutions mitigating network incast...


- A. Reduce TCP's min RTO (often use 200ms >> DC RTT)
- B. Increase buffer size
- C. Add small randomized delay at node before reply
- D. Use ECN with instantaneous queue size
- E. All of above

Network Bandwidth Measurements


- Bisection bandwidth: Split nodes into two halves such that bandwidth between the halves is minimal, that is the bisection b/w
- Full bisection bandwidth: $\frac{1}{2}$ of the nodes can communicate simultaneously with the other $\frac{1}{2}$

Full Bisection Bandwidth

- Eliminate oversubscription?
 - Enter Fat Trees
 - Provide static capacity
 - Heterogeneous Links
 - 1-10 GB in racks
 - 40-100GB to core

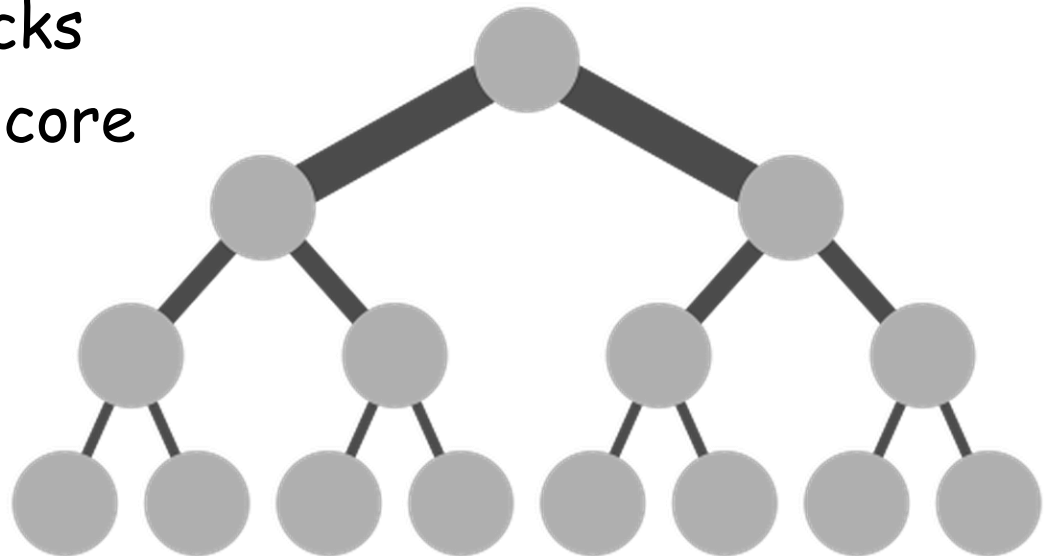

Full Bisection Bandwidth

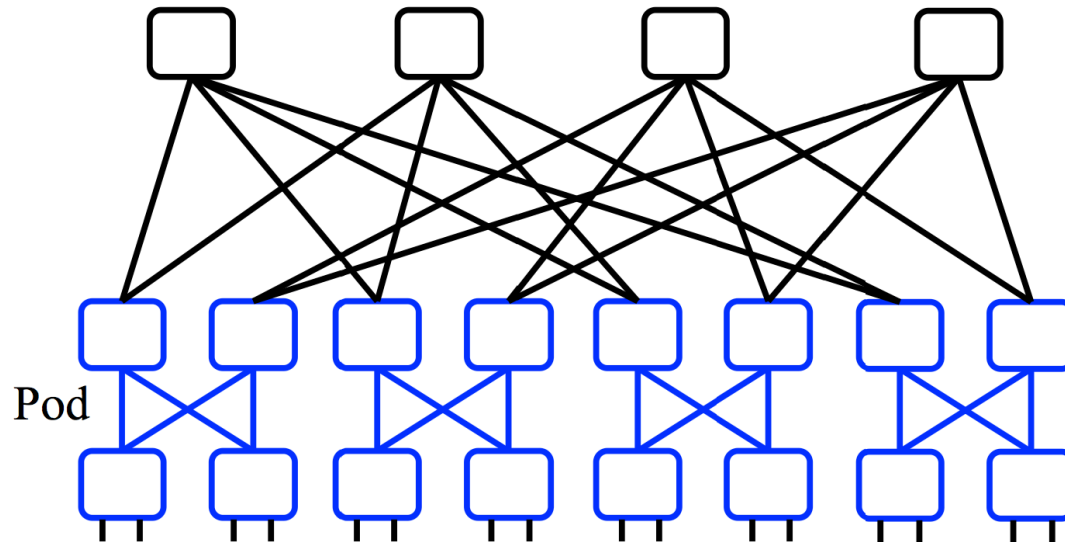

- But “scale up” link capacity has limits
- New scale out architectures
 - Build multi-stage FatTree out of k -port switches
 - $k/2$ ports up, $k/2$ down
 - Supports $k^3/4$ hosts: 48 ports, 27,648 hosts

Conclusion

- **Cloud computing**
 - Major trend in IT industry
 - Today's equivalent of factories
- **Datacenter networking**
 - Regular topologies interconnecting VMs
 - Mix of Ethernet and IP networking
- **Modular, multi-tier applications**
 - New ways of building applications
 - New performance challenges