Reasoning about Performance of Distributed Systems




COS 418: Distributed Systems
Lecture 23

Mike Freedman

1

Measuring Distributed Systems

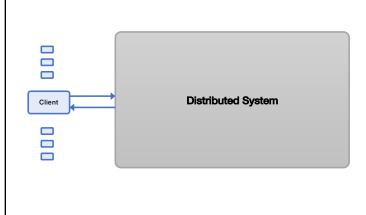

Measuring Distributed Systems



Distributed System


Client N

2

Latency


- How long a request takes to complete
- Measured externally from time request is sent until time response is received.

1

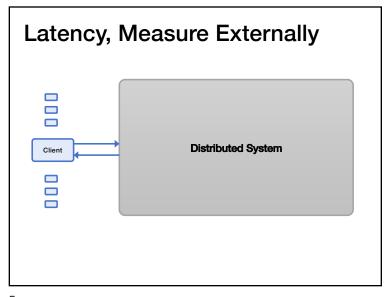

Latency, Reason Internally Single Machine Client


5

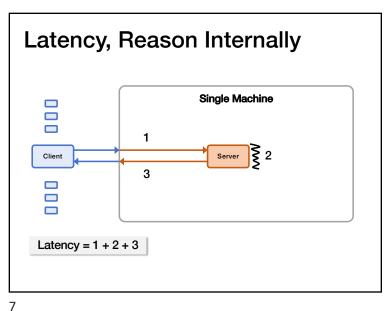

Throughput

• How many operations per unit time that a system can handle (typically ops / second)


 Measured externally as the rate that responses come out of the system

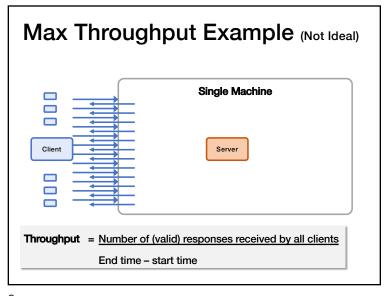


9

Measuring Throughput Method


- 1. Starting with low load
- 2. Increase load
- 3. Repeat until measured throughput stops increasing

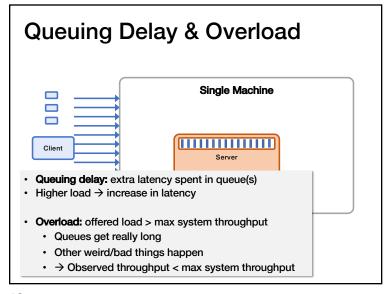

10

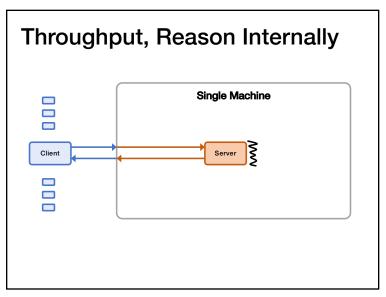

11

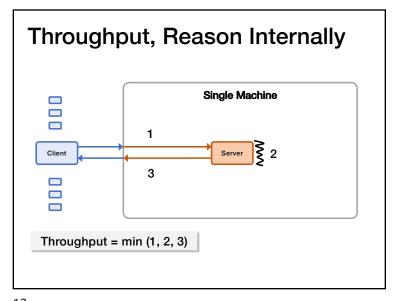

13

Load Generation

- Closed-loop
 - Each "client" sends one request, waits for the response to come back, and then sends another request
 - · More "clients" => more load
- Open-loop
 - Load is generated independently of the response rate of the system, typically from a probability distribution
 - · More directly control the load on the system
- Which one is more realistic?
- We'll reason using closed-loop clients

Throughput Bottlenecks (simplified)

Single Machine

Single Machine

Server

1

Server

2

3

Max throughput limited by some bottleneck resource:

1) Incoming bandwidth


2) Server CPU

3) Outgoing bandwidth

14

Mental Experimental Setup


- Start with 1 closed-loop client
 - · Expected latency?
 - Expected throughput?
- Double number of closed-loop clients
 - · Expected increase in latency?
 - Expected increase in throughput?
- Repeat

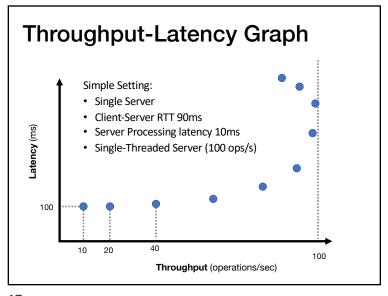

17

Throughput / Latency Relationship

- · Proportional at low load ... but not high load
- · Because measured throughput is a function of latency
 - · i.e., throughput bottleneck is offered load
- · Related, but you should reason about both
- For system A vs system B, all are possible:
 - A has lower latency and higher throughput than $\ensuremath{\mathsf{B}}$
 - A has lower latency and lower throughput than B
 - · A has higher latency and lower throughput than B
 - · A has higher latency and higher throughput than B

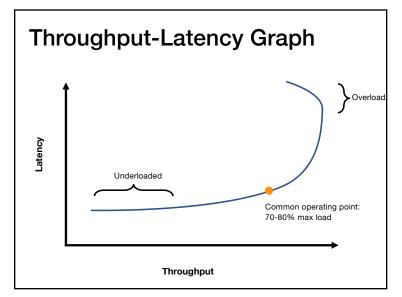

18

Evaluation in Minutes not Months


- Reasoning using your mental model is much much faster than really doing it
- · What would happen if?
 - I moved my servers from the San Jose datacenter to Oregon?
 - I switch from c5.xlarges to c5.24xlarges for my servers?
 - I doubled the number of servers?
 - I switch from system design X to system design Y?
 - · replace single server with Paxos-replicated system?
 - replace Paxos with eventually consistent design?
 - · add batching?
 - · replace Paxos with new variant?

Let's use these tools!


Mental Experimental Setup


- System A versus System B
- From 1 to N closed-loop clients loading each
- Compare throughput and latency

21

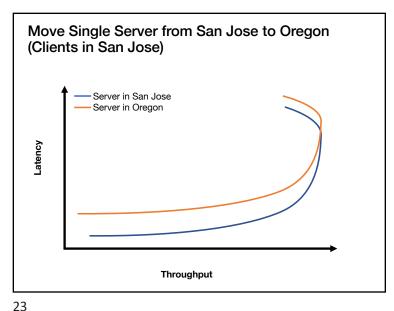

22

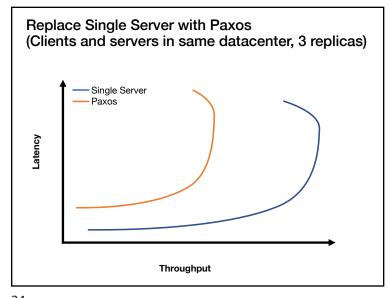

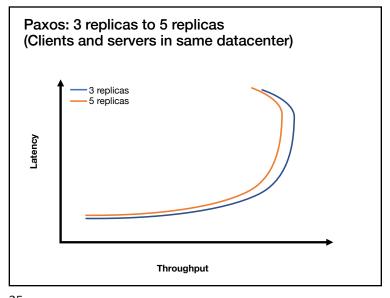

Paxos: 3 replicas to 30 replicas (Clients and servers in same datacenter)


3 replicas
30 replicas
Throughput

25


Batching

- Group together multiple operations
- Improves throughput, e.g.,
 - · Marshall data together
 - Send to network layer together
 - · Unmarshall data together
 - Handle group of operations together
- Delay processing/sending ops to increase batch size
 - Common way to trade an increase in latency for increase in throughput

26

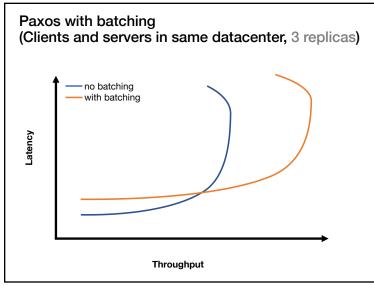

27

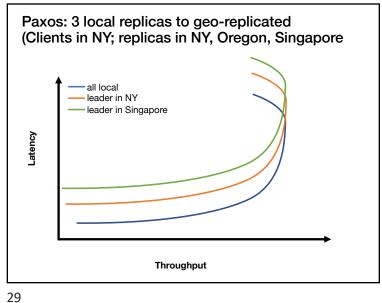

Summary

- · Measure distributed systems externally
- · Latency: how long operations take
- Throughput: how many operations/sec
- Reason about latency and throughput using internal knowledge of system design
 - (and back-of-the-envelope calculations)
- · Reason about effects on latency and throughput from changes to system choice, deployment, design
 - · Critical tool in system design