Internetworking

Outline

- Best Effort Service Model
- Global Addressing Scheme

IP Internet

- Concatenation of Networks



- Protocol Stack



Service Model

- Connectionless (datagram-based)
- Best-effort delivery (unreliable service)
  - packets are lost
  - packets are delivered out of order
  - duplicate copies of a packet are delivered
  - packets can be delayed for a long time
- Datagram format



Fragmentation and Reassembly

- Each network has some MTU
- Design decisions
  - fragment when necessary (MTU < Datagram)
  - try to avoid fragmentation at source host
  - re-fragmentation is possible
  - fragments are self-contained datagrams
  - use CS-PDU (not cells) for ATM
  - delay reassembly until destination host
  - do not recover from lost fragments

Example

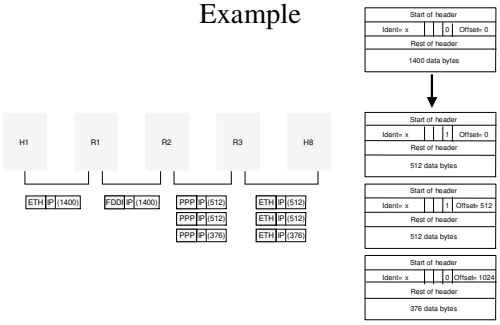

Global Addresses

- Properties
  - globally unique
  - hierarchical: network + host
- Dot Notation
  - 10.3.2.4
  - 128.96.33.81
  - 192.12.69.77



Datagram Forwarding

- Strategy
  - every datagram contains destination's address
  - if connected to destination network, then forward to host
  - if not directly connected, then forward to some router
  - forwarding table maps network number into next hop
  - each host has a default router
  - each router maintains a forwarding table
- Example (R2)

Network Number	Next Hop
1	R3
2	R1
3	interface 1
4	interface 0

Address Translation

- Map IP addresses into physical addresses
  - destination host
  - next hop router
- Techniques
  - encode physical address in host part of IP address
  - table-based
- ARP
  - table of IP to physical address bindings
  - broadcast request if IP address not in table
  - target machine responds with its physical address
  - table entries are discarded if not refreshed

ARP Details

- Request Format
  - HardwareType: type of physical network (e.g., Ethernet)
  - ProtocolType: type of higher layer protocol (e.g., IP)
  - HLEN & PLEN: length of physical and protocol addresses
  - Operation: request or response
  - Source/Target-Physical/Protocol addresses
- Notes
  - table entries timeout in about 10 minutes
  - update table with source when you are the target
  - update table if already have an entry
  - do not refresh table entries upon reference

ARP Packet Format

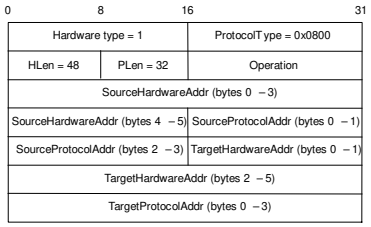

Internet Control Message Protocol (ICMP)

- Echo (ping)
- Redirect (from router to source host)
- Destination unreachable (protocol, port, or host)
- TTL exceeded (so datagrams don't cycle forever)
- Checksum failed
- Reassembly failed
- Cannot fragment