Switching and Forwarding

Outline

- Store-and-Forward Switches
- Bridges and Extended LANs
- Cell Switching
- Segmentation and Reassembly

Scalable Networks

- Switch
  - forwards packets from input port to output port
  - port selected based on address in packet header



- Advantages
  - cover large geographic area (tolerate latency)
  - support large numbers of hosts (scalable bandwidth)

Source Routing

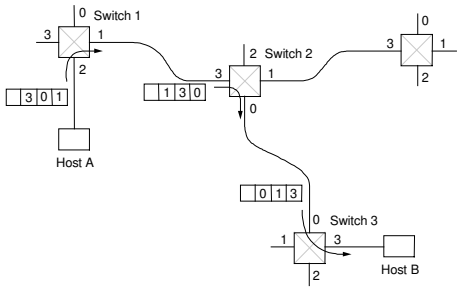

Virtual Circuit Switching

- Explicit connection setup (and tear-down) phase
- Subsequence packets follow same circuit
- Sometimes called *connection-oriented* model

- Analogy: phone call
- Each switch maintains a VC table



Datagram Switching

- No connection setup phase
- Each packet forwarded independently
- Sometimes called *connectionless* model

- Analogy: postal system
- Each switch maintains a forwarding (routing) table



Example Tables

- Circuit Table (switch 1, port 2)

VC In	VC Out	Port Out
5	11	1
6	8	1
…	…	…

- Forwarding Table (switch 1)

Address	Port
A	2
C	3
F	1
G	1
…	…

Virtual Circuit Model

- Typically wait full RTT for connection setup before sending first data packet.
- While the connection request contains the full address for destination, each data packet contains only a small identifier, making the per-packet header overhead small.
- If a switch or a link in a connection fails, the connection is broken and a new one needs to be established.
- Connection setup provides an opportunity to reserve resources.

Datagram Model

- There is no round trip delay waiting for connection setup; a host can send data as soon as it is ready.
- Source host has no way of knowing if the network is capable of delivering a packet or if the destination host is even up.
- Since packets are treated independently, it is possible to route around link and node failures.
- Since every packet must carry the full address of the destination, the overhead per packet is higher than for the connection-oriented model.

Bridges and Extended LANs

- LANs have physical limitations (e.g., 2500m)
- Connect two or more LANs with a *bridge*
  - accept and forward strategy
  - level 2 connection (does not add packet header)



- Ethernet Switch = Bridge on Steroids

Learning Bridges

- Do not forward when unnecessary
- Maintain forwarding table



Host	Port
A	1
B	1
C	1
X	2
Y	2
Z	2

- Learn table entries based on source address
- Table is an optimization; need not be complete
- Always forward broadcast frames

Spanning Tree Algorithm

- Problem: loops



- Bridges run a distributed spanning tree algorithm
  - select which bridges actively forward
  - developed by Radia Perlman
  - now IEEE 802.1 specification



Algorithm Overview

- Each bridge has unique id (e.g., B1, B2, B3)
- Select bridge with smallest id as root
- Select bridge on each LAN closest to root as designated bridge (use id to break ties)
- Each bridge forwards frames over each LAN for which it is the designated bridge



Algorithm Details

- Bridges exchange configuration messages
  - id for bridge sending the message
  - id for what the sending bridge believes to be root bridge
  - distance (hops) from sending bridge to root bridge
- Each bridge records current best configuration message for each port
- Initially, each bridge believes it is the root

Algorithm Detail (cont)

- When learn not root, stop generating config messages
  - in steady state, only root generates configuration messages
- When learn not designated bridge, stop forwarding config messages
  - in steady state, only designated bridges forward config messages
- Root continues to periodically send config messages
- If any bridge does not receive config message after a period of time, it starts generating config messages claiming to be the root

Broadcast and Multicast

- Forward all broadcast/multicast frames
  - current practice
- Learn when no group members downstream
- Accomplished by having each member of group G send a frame to bridge multicast address with G in source field

Limitations of Bridges

- Do not scale
  - spanning tree algorithm does not scale
  - broadcast does not scale
- Do not accommodate heterogeneity
- Caution: beware of transparency

Cell Switching (ATM)

- Connection-oriented packet-switched network
- Used in both WAN and LAN settings
- Signaling (connection setup) Protocol: Q.2931
- Specified by ATM forum
- Packets are called *cells*
  - 5-byte header + 48-byte payload
- Commonly transmitted over SONET
  - other physical layers possible

Variable vs Fixed-Length Packets

- No Optimal Length
  - if small: high header-to-data overhead
  - if large: low utilization for small messages
- Fixed-Length Easier to Switch in Hardware
  - simpler
  - enables parallelism

Big vs Small Packets

- Small Improves Queue behavior
  - finer-grained preemption point for scheduling link
    - maximum packet = 4KB
    - link speed = 100Mbps
    - transmission time = 4096 x 8/100 = 327.68us
    - high priority packet may sit in the queue 327.68us
    - in contrast, 53 x 8/100 = 4.24us for ATM
  - near cut-through behavior
    - two 4KB packets arrive at same time
    - link idle for 327.68us while both arrive
    - at end of 327.68us, still have 8KB to transmit
    - in contrast, can transmit first cell after 4.24us
    - at end of 327.68us, just over 4KB left in queue

Big vs Small (cont)

- Small Improves Latency (for voice)
  - voice digitally encoded at 64KBps (8-bit samples at 8KHz)
  - need full cell's worth of samples before sending cell
  - example: 1000-byte cells implies 125ms per cell (too long)
  - smaller latency implies no need for echo cancellers
- ATM Compromise: 48 bytes = (32+64)/2

Cell Format

- User-Network Interface (UNI)



  - host-to-switch format
  - GFC: Generic Flow Control (still being defined)
  - VCI: Virtual Circuit Identifier
  - VPI: Virtual Path Identifier
  - Type: management, congestion control, AAL5 (later)
  - CLPL Cell Loss Priority
  - HEC: Header Error Check (CRC-8)
- Network-Network Interface (NNI)
  - switch-to-switch format
  - GFC becomes part of VPI field

Segmentation and Reassembly

- ATM Adaptation Layer (AAL)
  - AAL 1 and 2 designed for applications that need guaranteed rate (e.g., voice, video)
  - AAL 3/4 designed for packet data
  - AAL 5 is an alternative standard for packet data

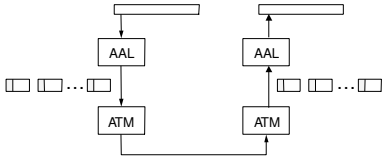

AAL 3/4

- Convergence Sublayer Protocol Data Unit (CS-PDU)



  - CPI: commerce part indicator (version field)
  - Btag/Etag:beginning and ending tag
  - BAsize: hint on amount of buffer space to allocate
  - Length: size of whole PDU

Cell Format



  - Type
    - BOM: beginning of message
    - COM: continuation of message
    - EOM end of message
  - SEQ: sequence of number
  - MID: message id
  - Length: number of bytes of PDU in this cell

AAL5

- CS-PDU Format



  - pad so trailer always falls at end of ATM cell
  - Length: size of PDU (data only)
  - CRC-32 (detects missing or misordered cells)
- Cell Format
  - end-of-PDU bit in Type field of ATM header