

A Model of BGP Routing for Network Engineering

Nick Feamster, *MIT*

Jared Winick, *Lockheed Martin*

Jennifer Rexford, *AT&T Labs--Research*


Problem: Network operators must tune routing protocols to provide good performance in the face of changing conditions.

Today: Tweak configuration and pray.

Our Solution: Compute how a configuration change will affect traffic flow before deployment.


Overview

- Internet composed of autonomous systems (ASes)
- Multiple connections between ASes

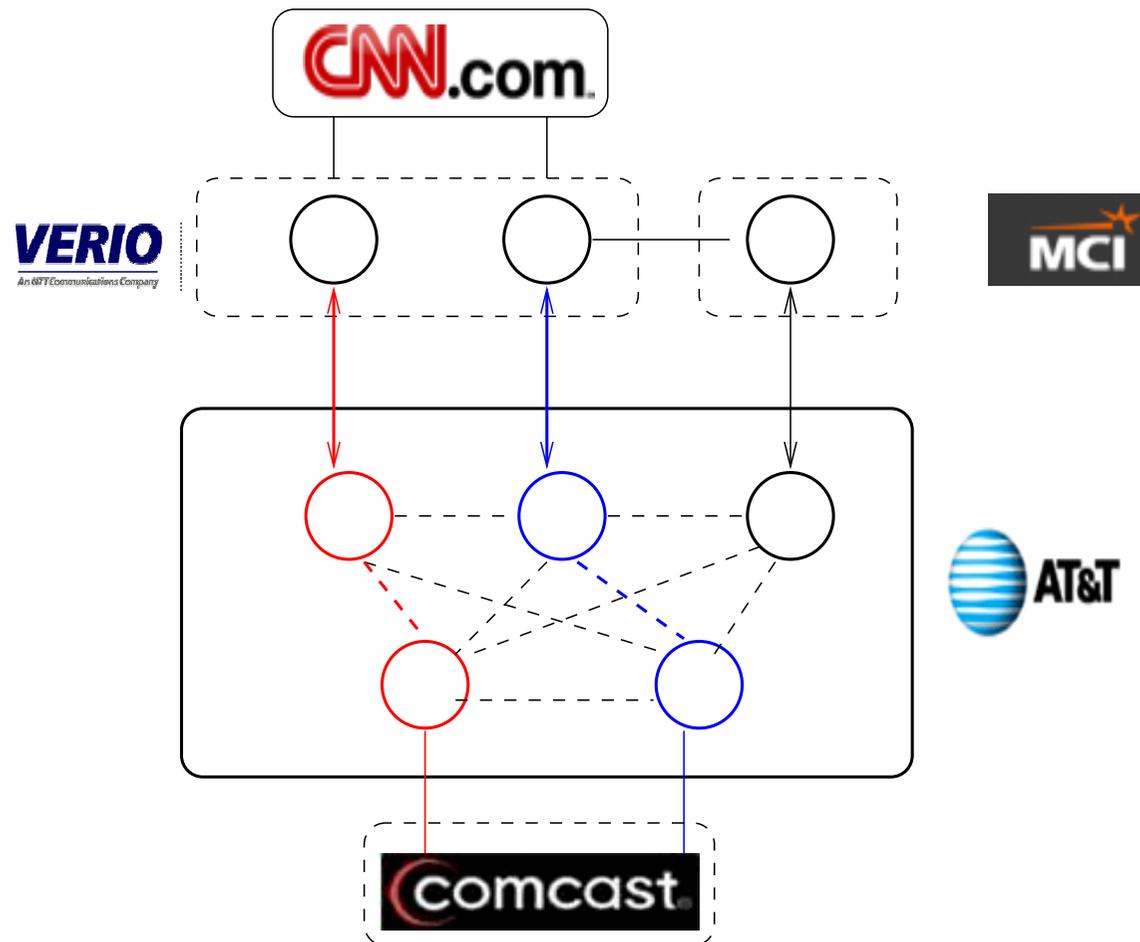

Network Operators Must Respond to Events


- Changes in **Traffic Volume**

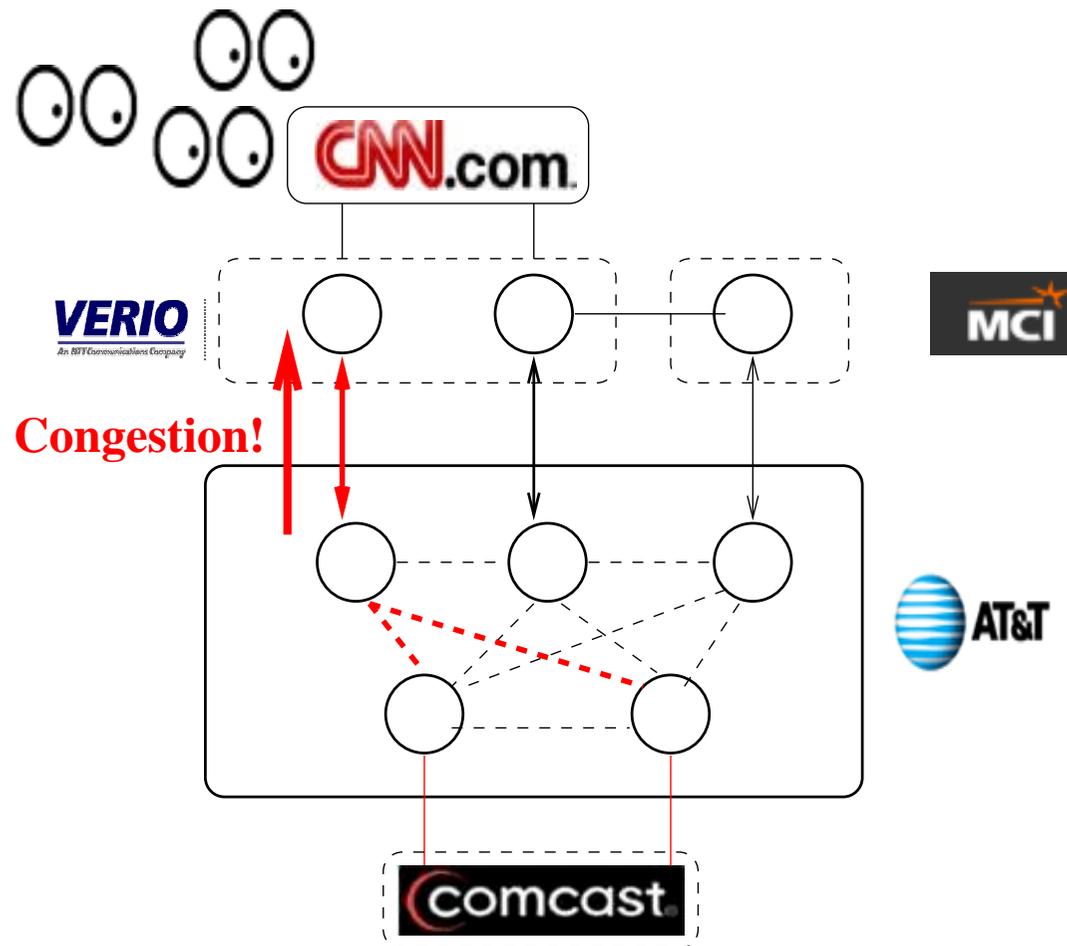

Network Operators Must Respond to Events


- Changes in **Traffic Volume**

Note: The network does not adapt automatically!

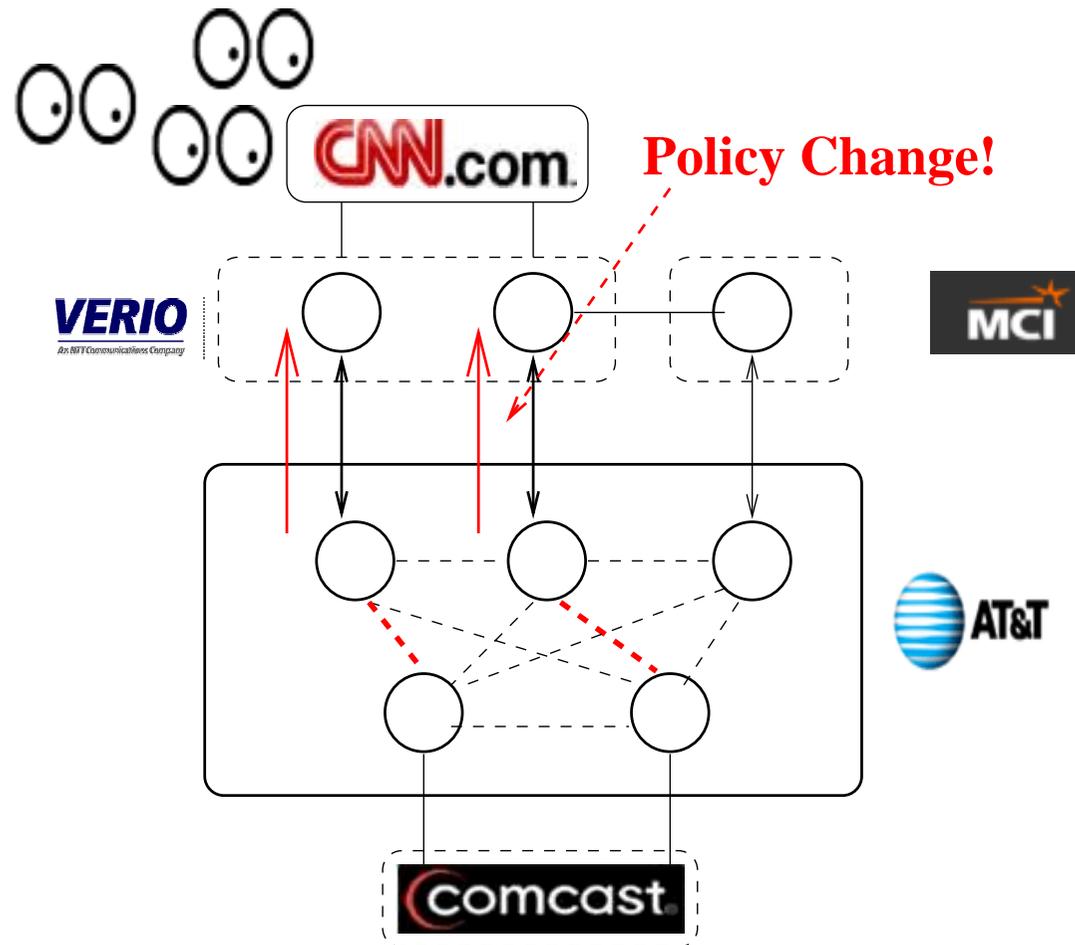


Network Operators Must Respond to Events

- Changes in **Link Capacity**

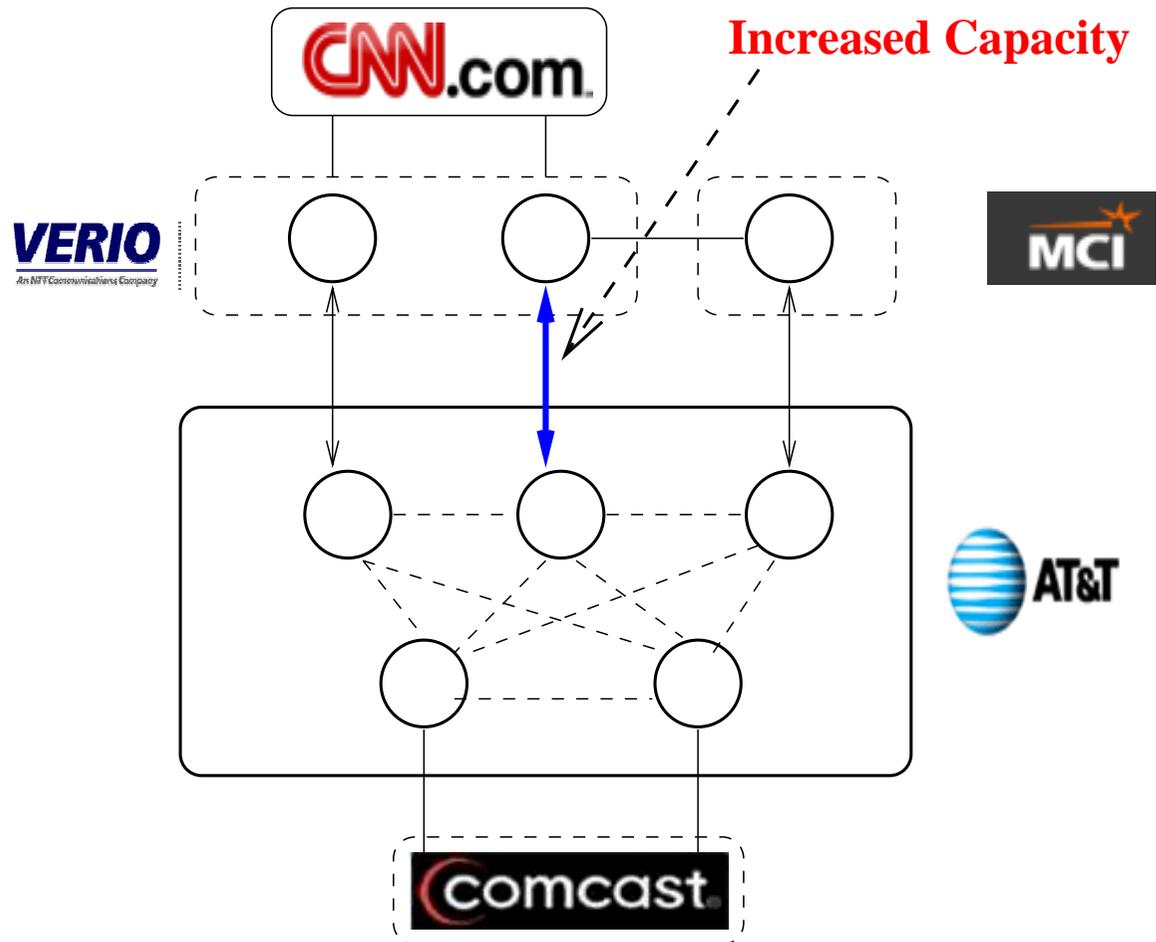

Network Operators Must Respond to Events

- Changes in **Link Capacity**

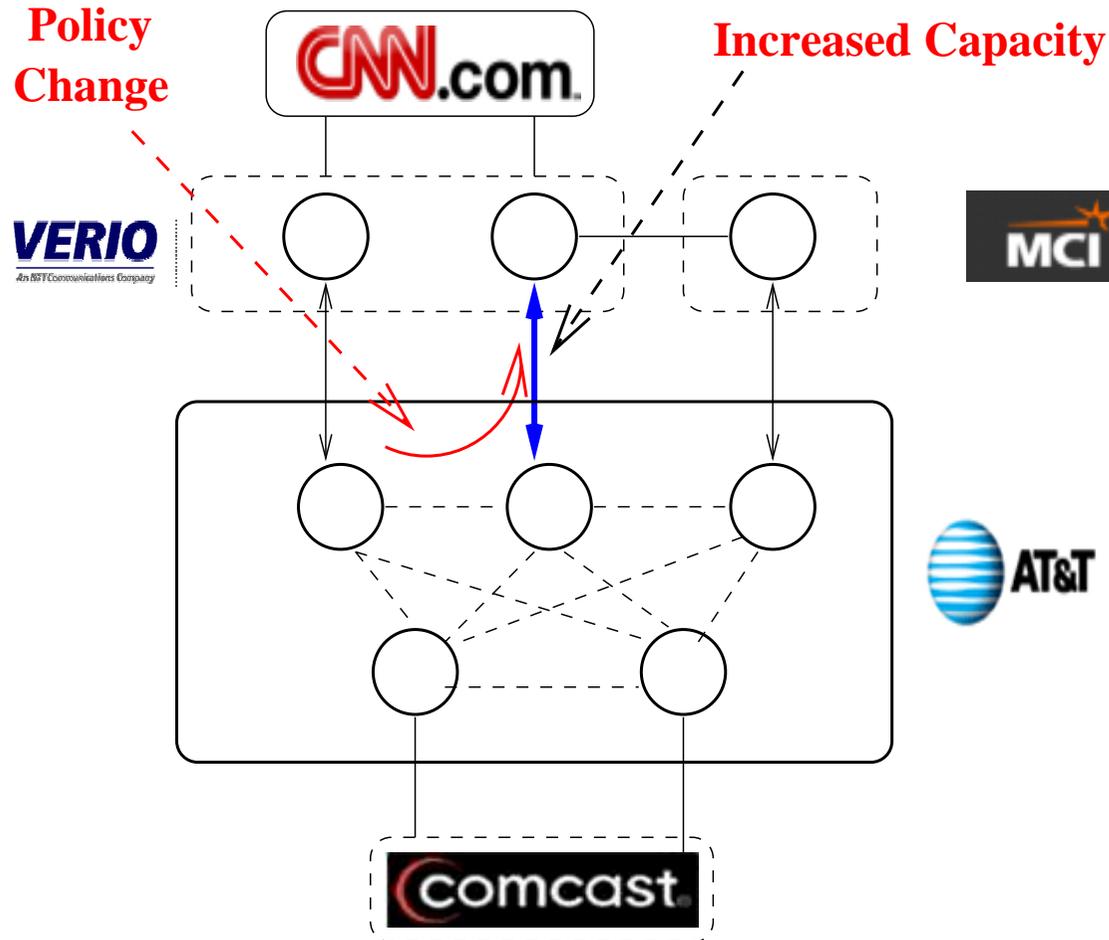

Predicting Traffic Flow: Many Requirements

- Knowledge about traffic volumes
- Information about available routes
- Prediction of paths between routers within the AS

Our contribution: Modeling how each router within one autonomous system (AS) will select routes to external destinations.

*Implemented in a **accurate** and **fast** tool that has been evaluated and tested on the AT&T IP backbone.*

Strawman #1: Simulation

Observation:

If a routing system converges to a unique outcome, the outcome is independent of the order that routers exchange messages and select paths.

Advantages

- *Time ordering of messages does not affect outcome.*

Simulation will arrive at correct answer.

Disadvantages

- Operators must know **outcomes**, not dynamics.
- Many possible message **orderings**: potentially slow.

Simulation: Accurate, but slow.

Strawman #2: Rank Routes, Pick the Best One

Problem

Incorrect answer!


Two Artifacts of Border Gateway Protocol (BGP)

- **Impossible to impose a complete ranking of routes at a single router.**
 - ▶ Ranking between two routes can depend on presence (or absence) of other routes.
- **All routes may not be visible at every router.**
 - ▶ Set of routes learned at one router depend on route selection at other routers.


Note: These "artifacts" provide flexibility and scalability!

Instead: Model a Certain Message Ordering

- **Step 1:** Egress routers compute best routes.
 - ▶ **Outcome:** A set of egress routers for each destination.

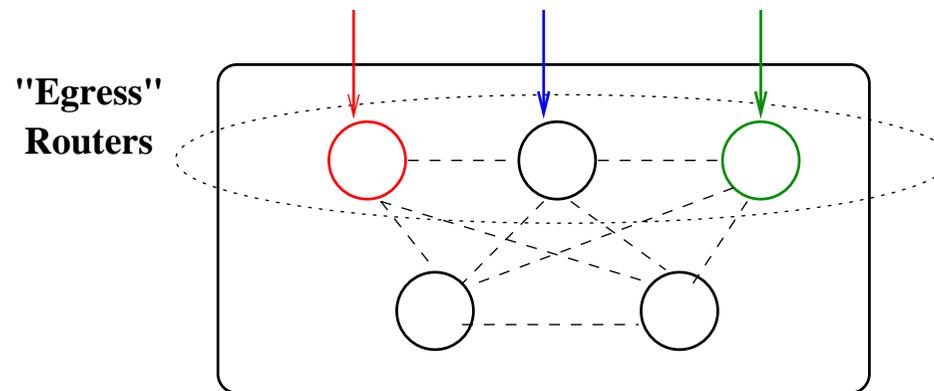


- **Step 2:** Egress routers propagate these routes to other routers within the AS.
 - ▶ **Outcome:** Each router in the AS selects a egress router.

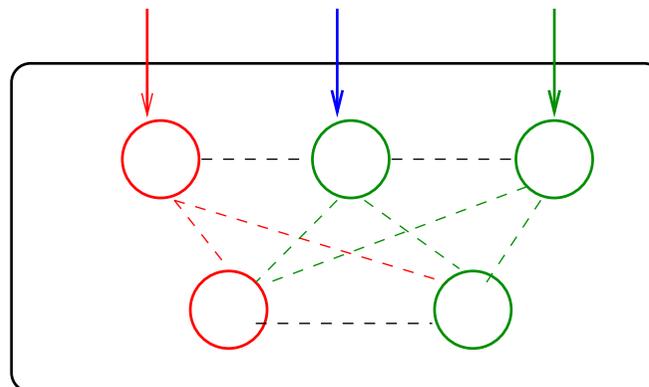

Instead: Model a Certain Message Ordering

- **Step 1:** Egress routers compute best routes.


- ▶ **Outcome:** A set of egress routers for each destination.

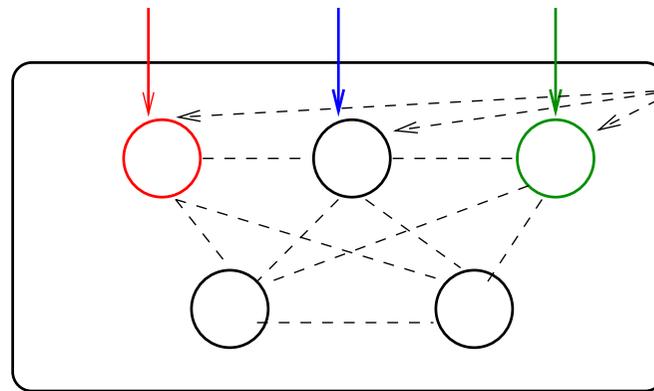

Operators adjust BGP policies at egress routers to affect this set.

- **Step 2:** Egress routers propagate these routes to other routers within the AS.


- ▶ **Outcome:** Each router in the AS selects a egress router.

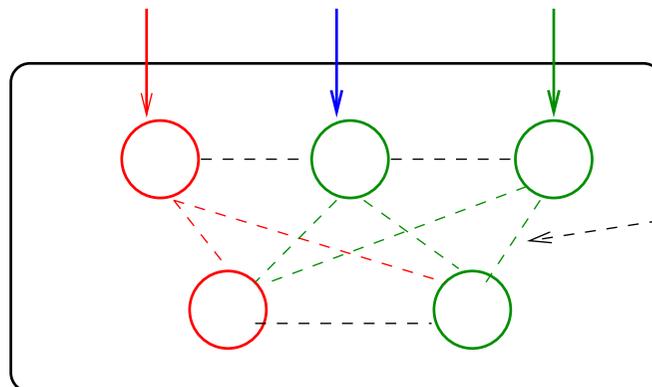

Operators adjust internal routing to affect exit point selection.

Step 1: Egress Routers Compute Best Routes

- *Problem:* Ranking of routes at one router can depend on routes learned at other routers.

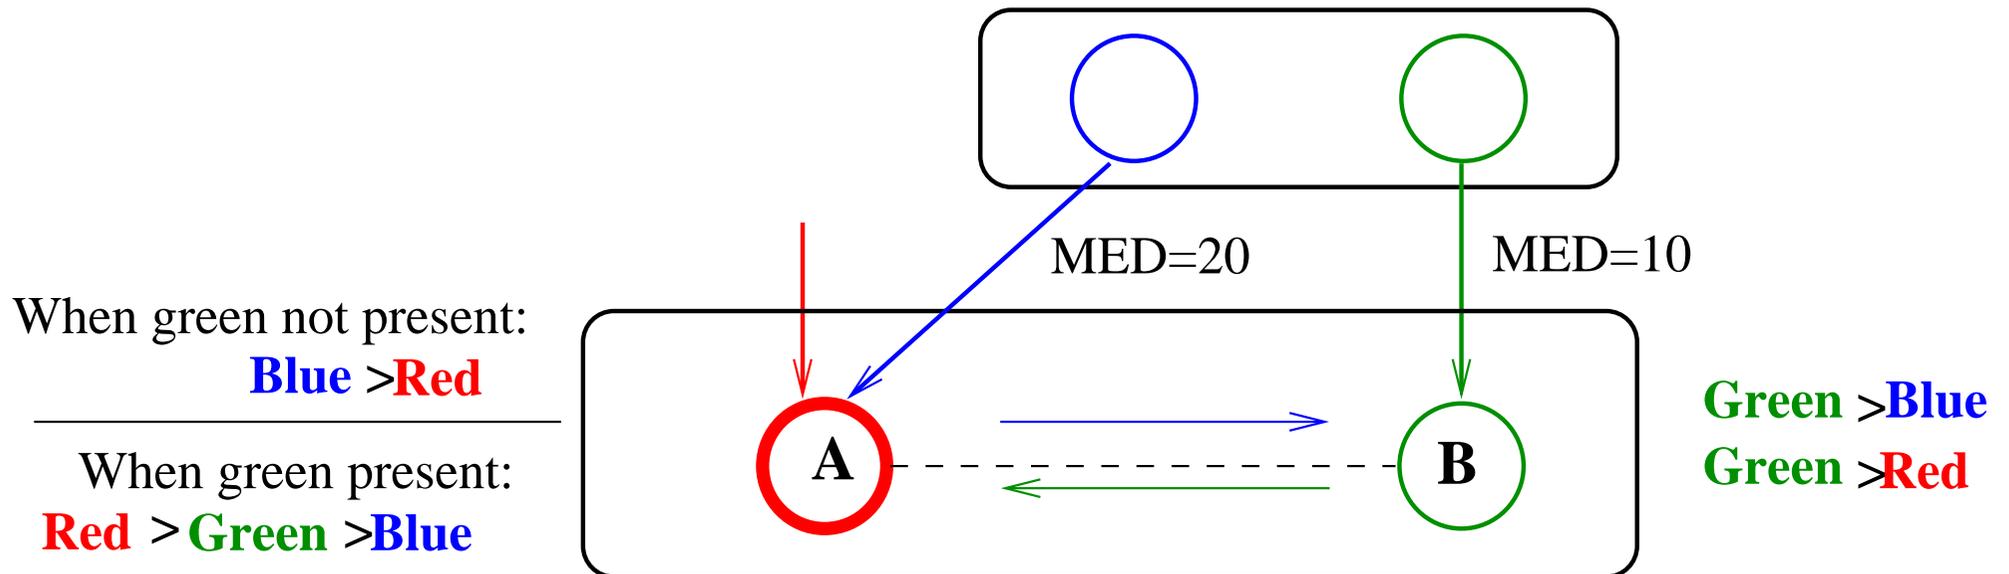


- *Solution:* Compute best local routes where possible, and propagate the effects.

Step 1: Egress Routers Compute Best Routes

● Algorithm:


1. Consider locally-best route at one router.
2. Eliminate routes as follows:
 - ▶ If the route is **worse than the locally-best route at another router**, eliminate it.
 - ▶ Else, select it, and eliminate all other routes at that router.

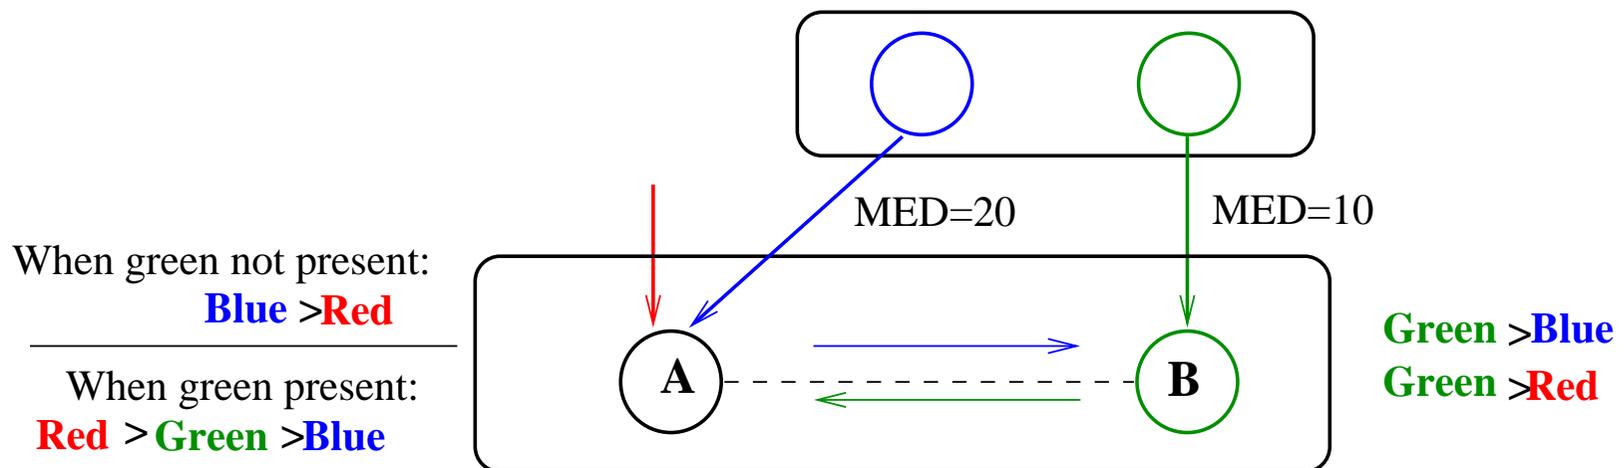

Step 1: Egress Routers Compute Best Routes


● Algorithm:

1. Consider locally-best route at one router.
2. Eliminate routes as follows:
 - ▶ If the route is **worse than the locally-best route at another router**, eliminate it.
 - ▶ Else, select it, and eliminate all other routes at that router.

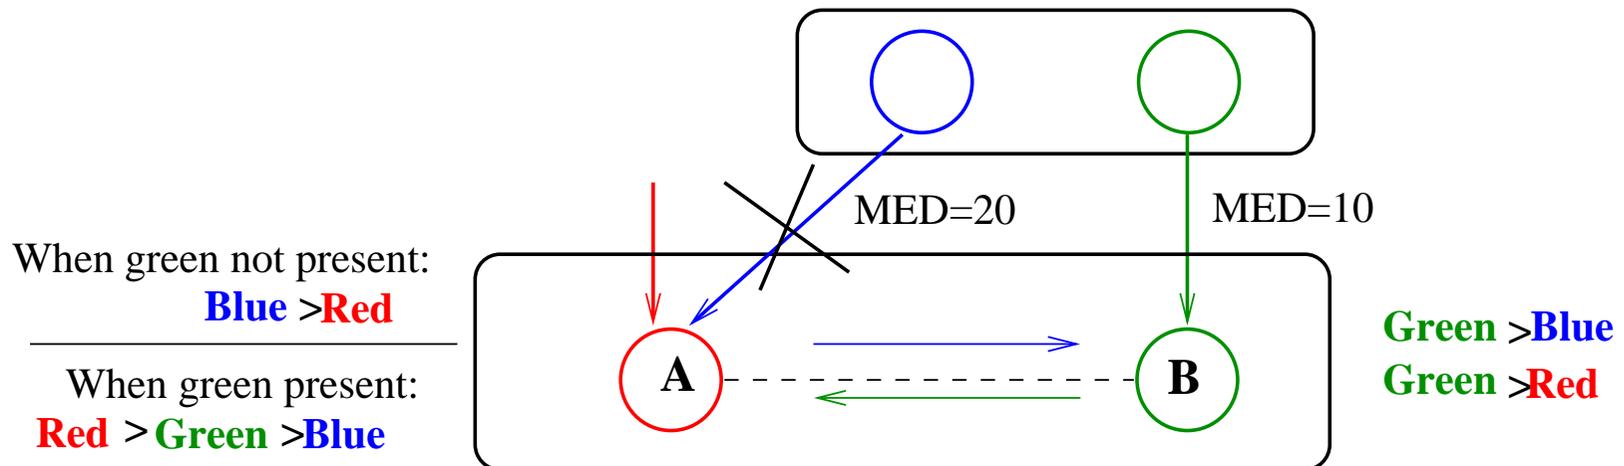


Model a Certain Message Ordering

- **Step 1:** Egress routers compute best routes.
 - ▶ Outcome: Each egress router has a route to the destination.




- **Step 2:** Egress routers propagate these routes to other routers within the AS.
 - ▶ **Outcome:** Each router in the AS selects a egress router.

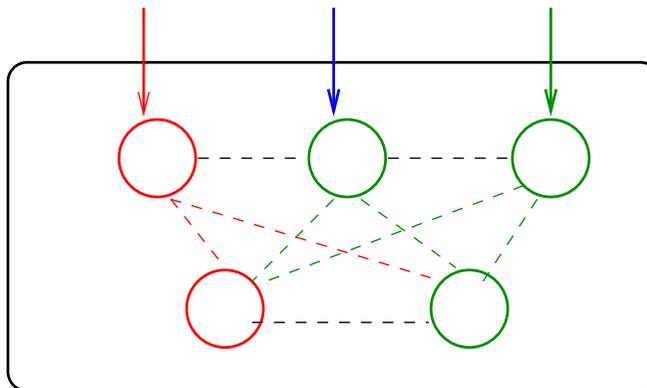

Step 2: Choosing the Best Egress Router

- *Problem:*


Route at closest egress may not be visible.

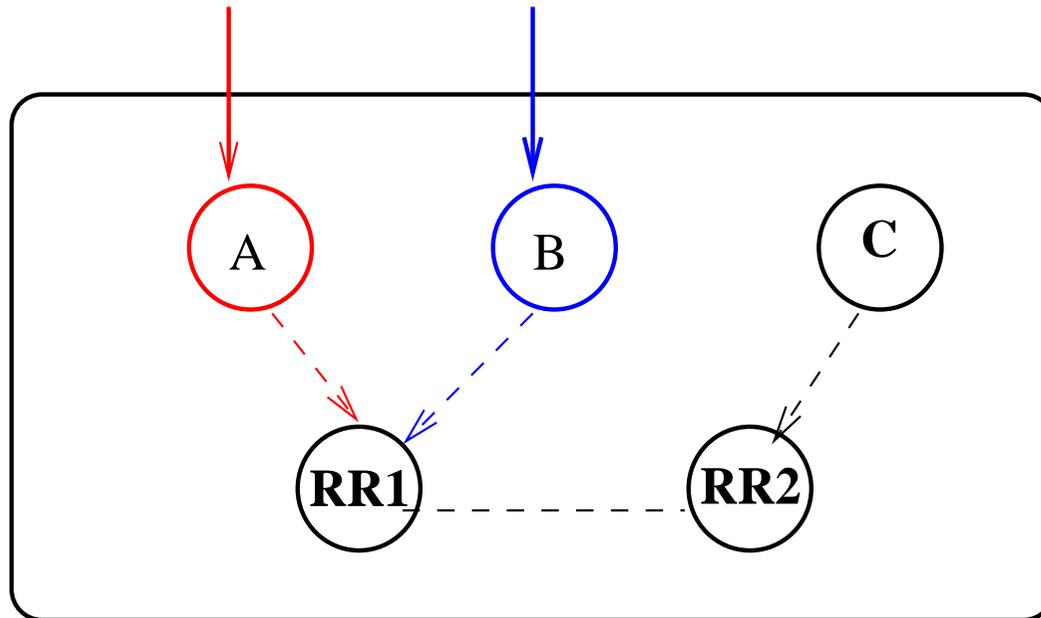

Step 2: Choosing the Best Egress Router

- *Problem:*


Route at closest egress may not be visible.

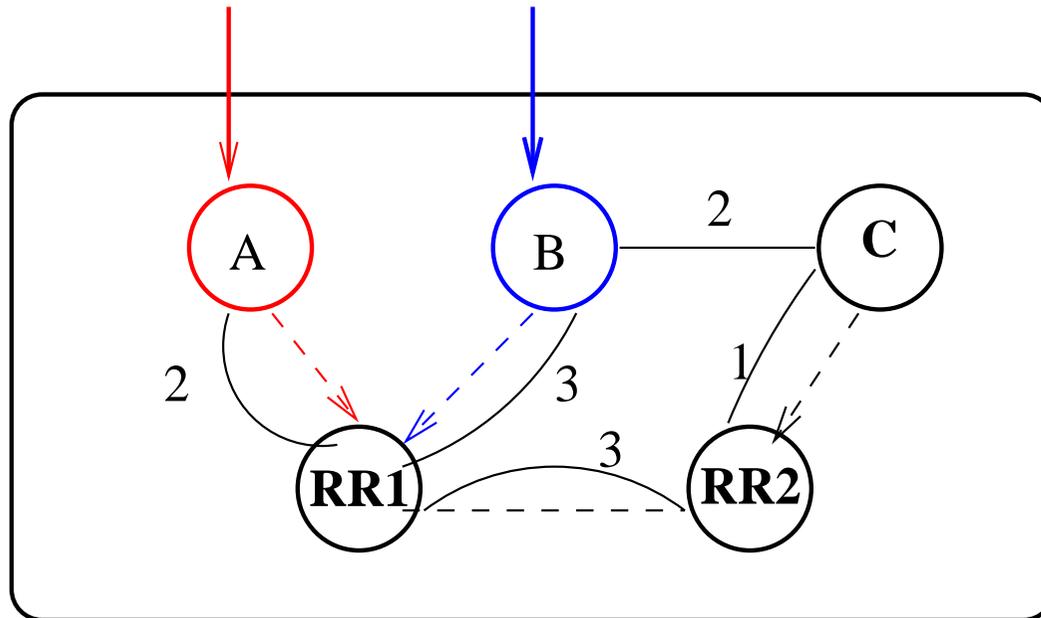

Step 2: Choosing the Best Egress Router

- *Problem:*


Route at closest egress may not be visible.

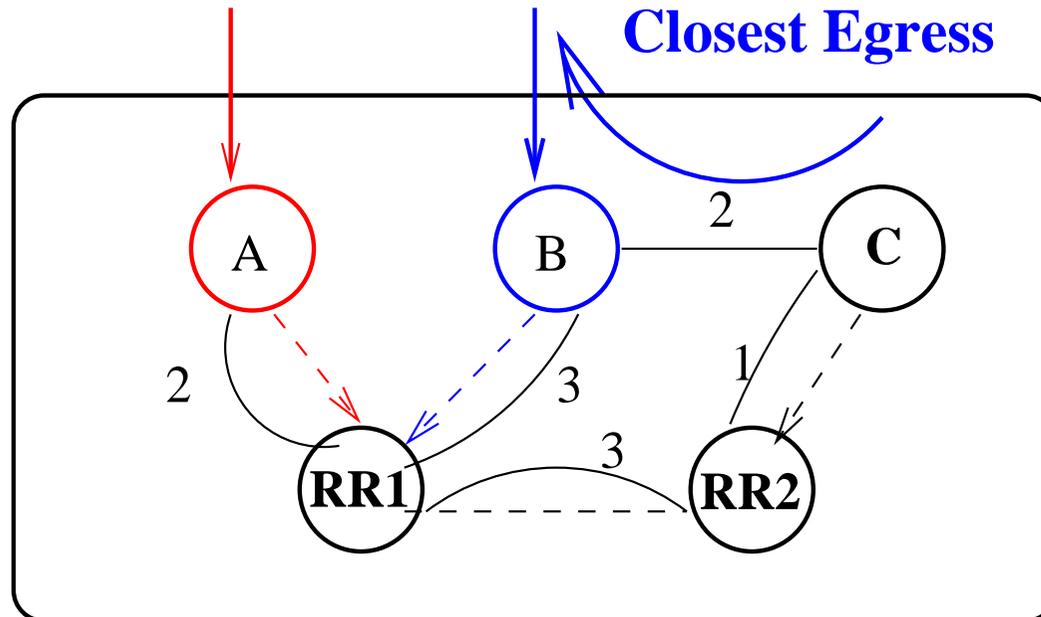

Step 2: Choosing the Best Egress Router

- *Problem:*

Route at closest egress may not be visible.

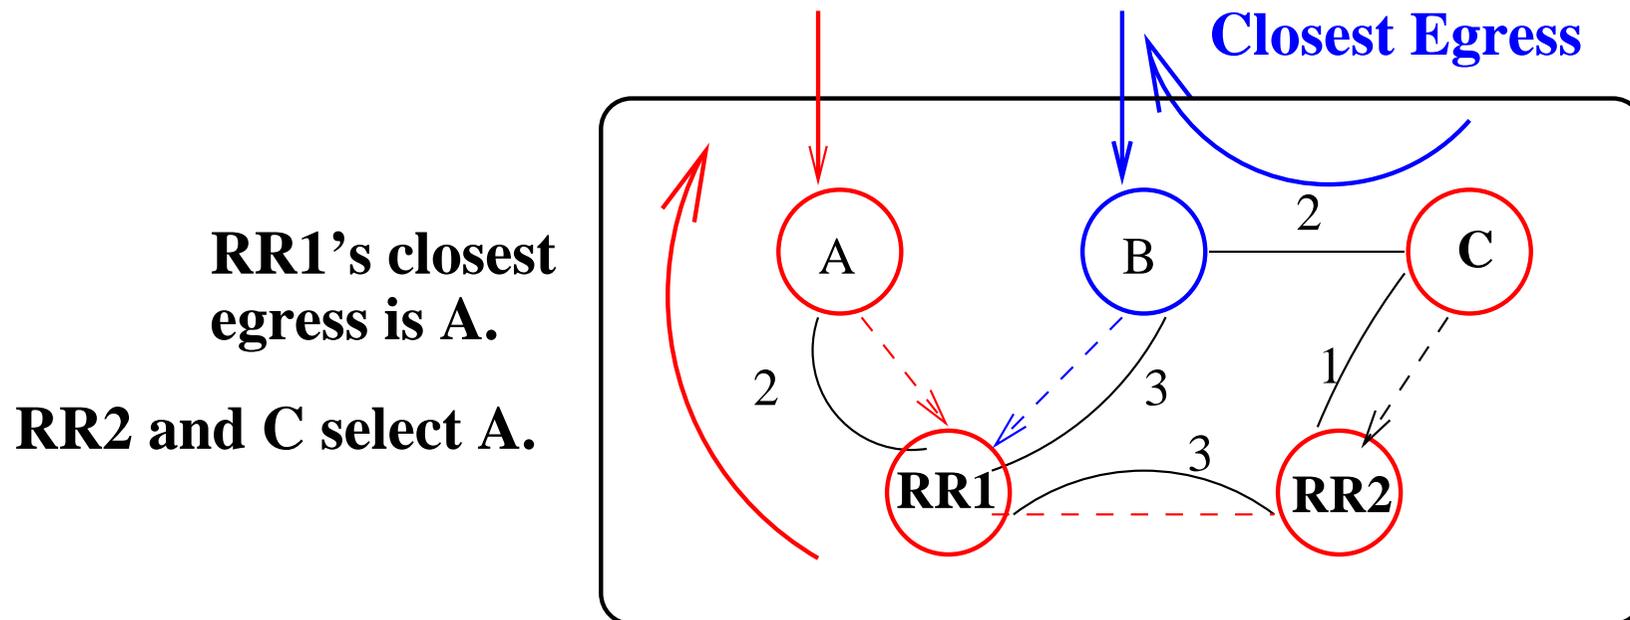


- *Solution:*

First, compute routes at routers for which available routes are known. Propagate effects.

Step 2: Choosing the Best Egress Router

Algorithm (Graph Walk):


1. Assign routes to egress routers. (*done in Step 1*)
 2. Assign routes to the parents of these routers.
- Once at top level of the hierarchy, proceed down.*

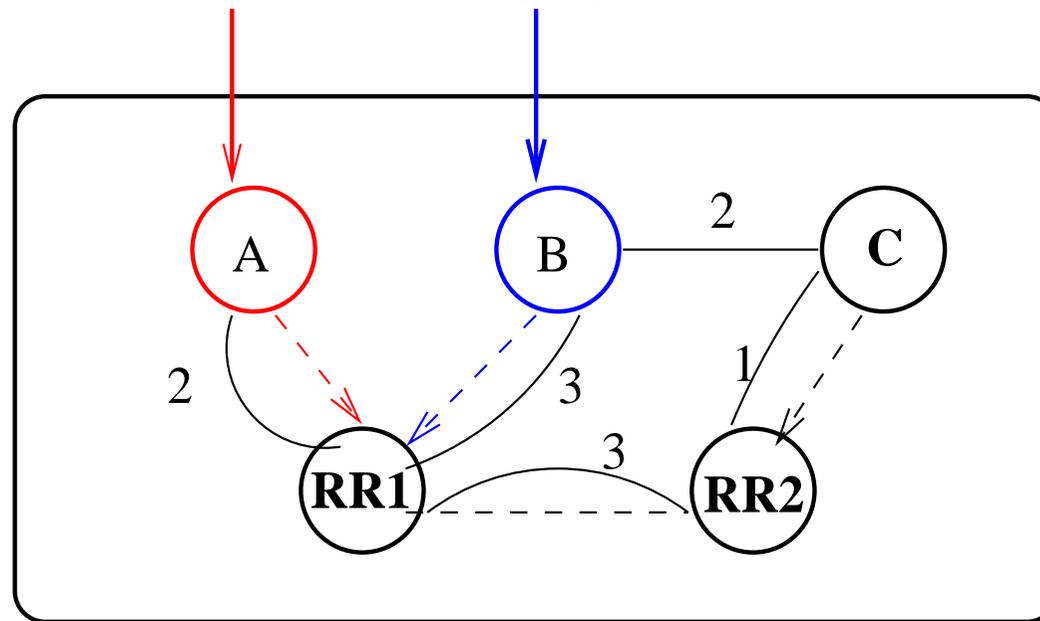

Step 2: Choosing the Best Egress Router

Algorithm (Graph Walk):


1. Assign routes to egress routers. (*done in Step 1*)
 2. Assign routes to the parents of these routers.
- Once at top level of the hierarchy, proceed down.*

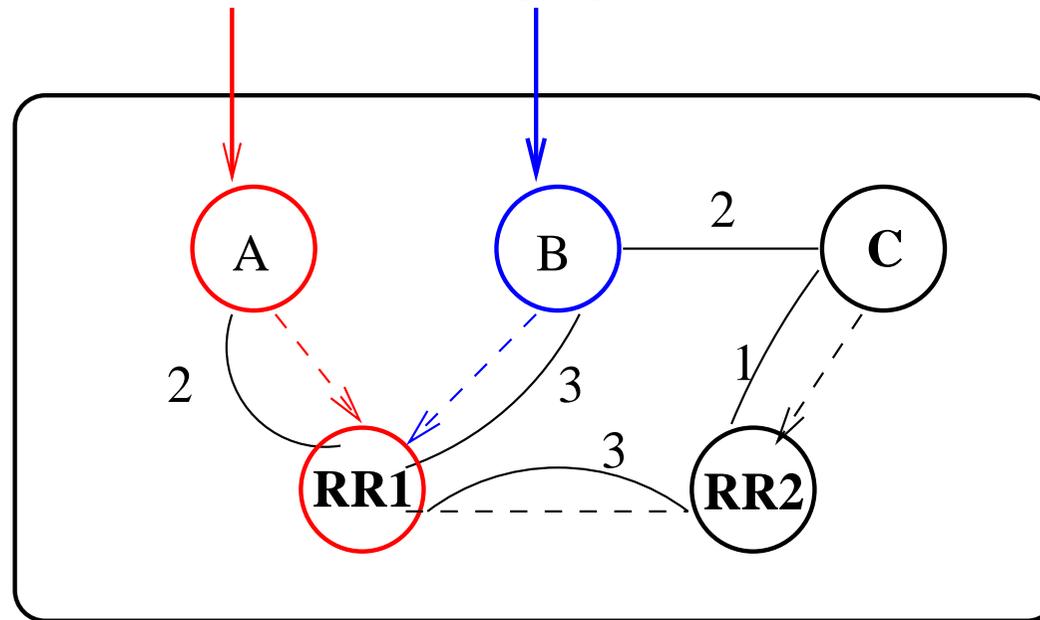

Step 2: Choosing the Best Egress Router

Algorithm (Graph Walk):

1. Assign routes to egress routers. (*done in Step 1*)
 2. Assign routes to the parents of these routers.
- Once at top level of the hierarchy, proceed down.*

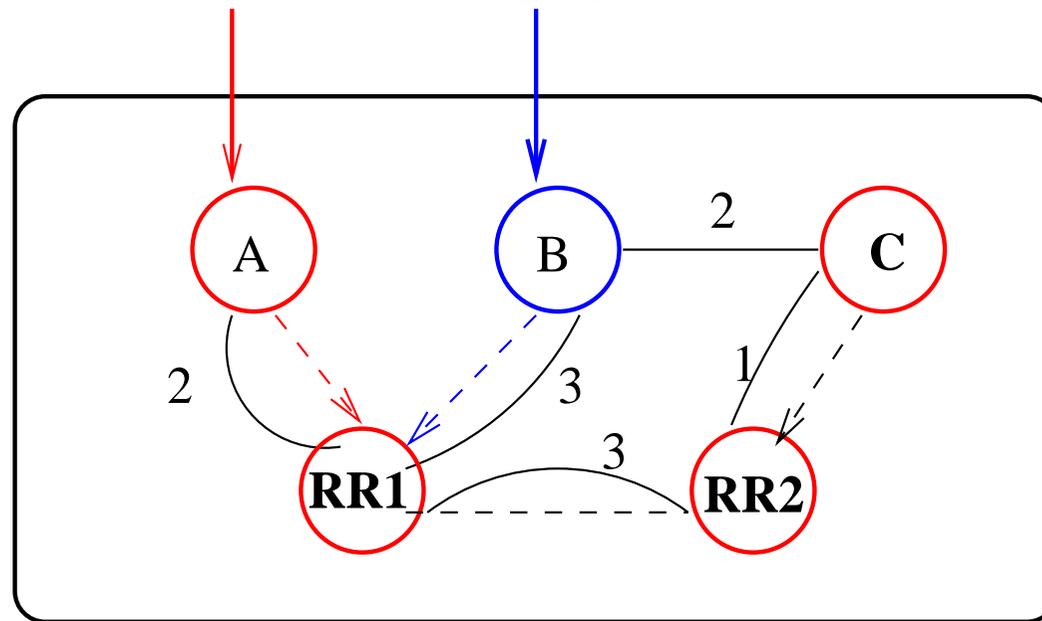

Step 2: Choosing the Best Egress Router

- **Constraints:**


1. No partitions in the internal BGP graph.
2. Routers are "closer" to clients than non-clients.
3. No cycles in the internal BGP graph.

These constraints can be checked with static analysis.

Summary: Model of BGP Route Selection


- **Step 1:** Egress routers compute best routes.

- ▶ **Outcome:** Each egress router has a route to the destination.

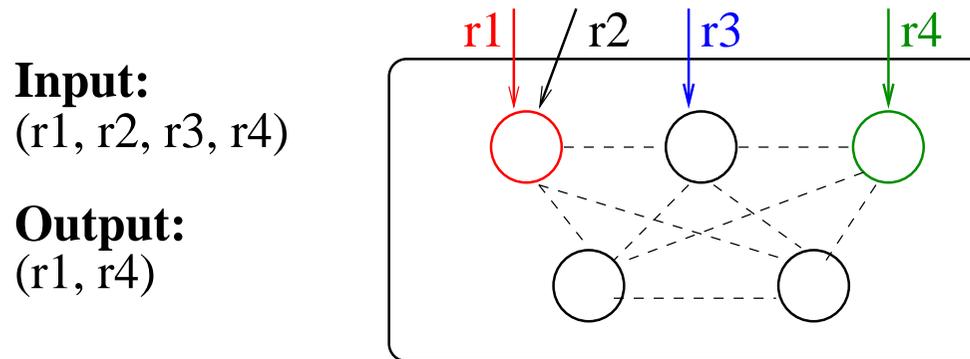

- **Step 2:** Intra-AS propagation.


- ▶ **Outcome:** Each router in the AS selects a egress router.

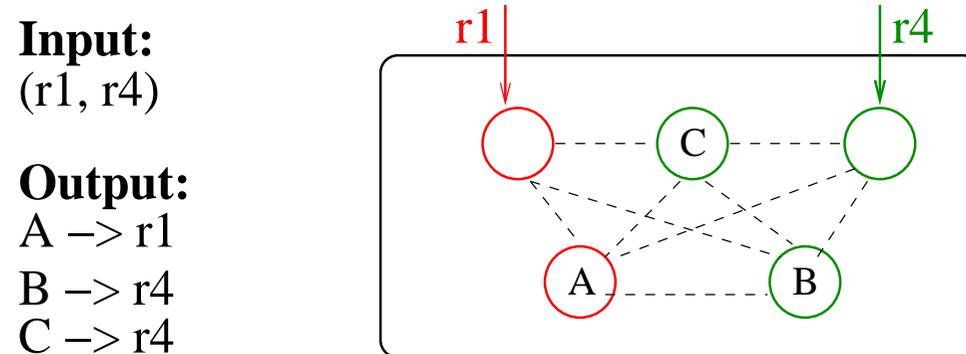

Summary: Model of BGP Route Selection


- **Step 1:** Egress routers compute best routes.

- ▶ **Outcome:** Each egress router has a route to the destination.

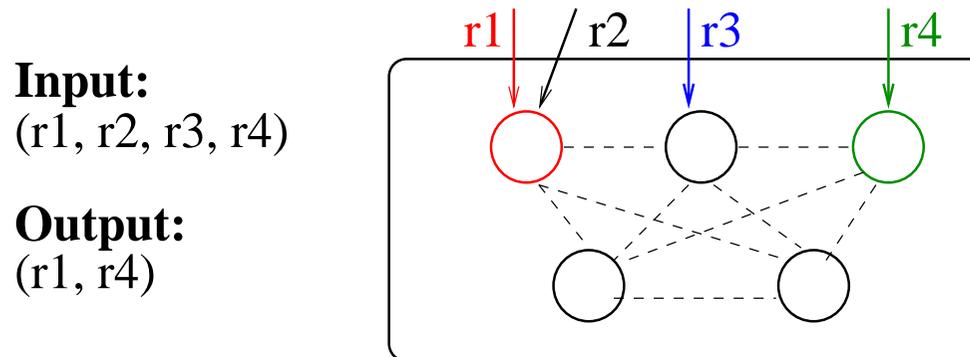

- **Step 2:** Intra-AS propagation.

- ▶ **Outcome:** Each router in the AS selects a egress router.

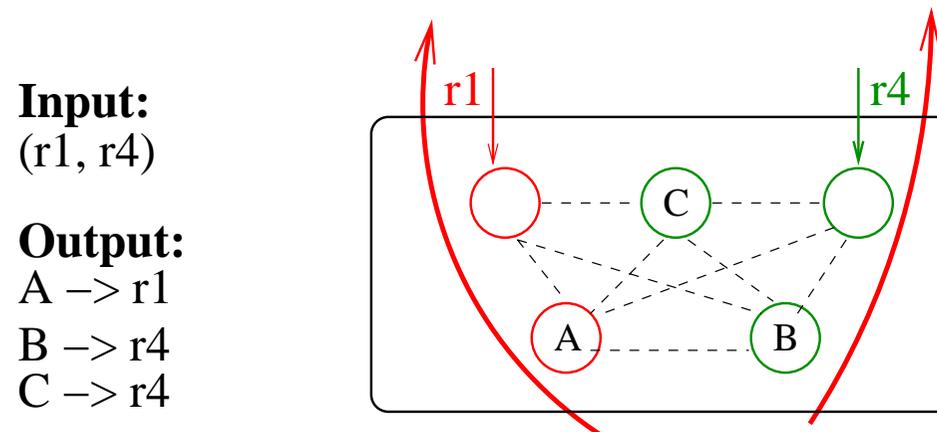

Implementation is Efficient and Accurate

- **< 1 second** to compute effects of a policy change on AT&T network. (100s of routers, ~ 90k destinations)
 - ▶ Could be used as the "inner loop" for optimization.
- Model is accurate in more than 99% of all cases.

<i>Router</i>	<i># Predictions</i>	<i>Total Errors</i>
RR1	89,343	554 (0.620%)
RR2	88,647	394 (0.444%)
AR1	88,649	391 (0.441%)
AR2	76,733	511 (0.666%)

Conclusion

- Operators must tune routing protocols as network conditions change.
 - ▶ Unfortunately, predicting the effects of these changes is difficult.
- We present a model of BGP routing.
 - ▶ Useful for offline computation
 - ▶ Fast and accurate
- Two artifacts complicate modeling BGP
 - ▶ No total ordering (MED attribute)
 - ▶ Limited route visibility (route reflection)

In the future, we should design distributed routing protocols in ways that facilitate modeling.