



Links

Reading: Chapter 2

COS 461: Computer Networks
Spring 2010 (MW 3:00-4:20 in COS 105)

Mike Freedman

<http://www.cs.princeton.edu/courses/archive/spring10/cos461/>


Goals of Today's Lecture

- **Link-layer services**
 - Encoding, framing, and error detection
 - Error correction and flow control
- **Sharing a shared media**
 - Channel partitioning
 - Taking turns
 - Random access
- **Ethernet protocol**
 - Carrier sense, collision detection, and random access
 - Frame structure
 - Hubs and switches

Link Layer Protocol for Each Hop

- IP packet transferred over multiple hops
 - Each hop has a link layer protocol
 - May be different on different hops
- Analogy: trip from Princeton to Lausanne
 - Limo: Princeton to JFK
 - Plane: JFK to Geneva
 - Train: Geneva to Lausanne
- Refining the analogy
 - Tourist == packet
 - Transport segment == communication link
 - Transportation mode == link-layer protocol
 - Travel agent == routing algorithm

Adaptors Communicating

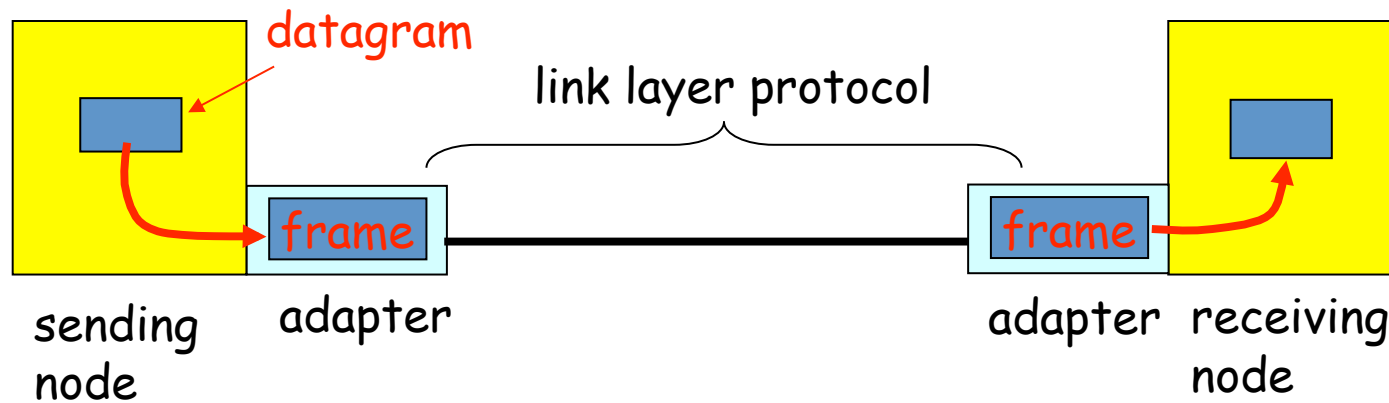


- Link layer implemented in adaptor (network interface card)
 - Ethernet card, PCMCIA card, 802.11 card
- Sending side:
 - Encapsulates datagram in a frame
 - Adds error checking bits, flow control, etc.
- Receiving side
 - Looks for errors, flow control, etc.
 - Extracts datagram and passes to receiving node

Link-Layer Services

- **Encoding**
 - Representing the 0s and 1s
- **Framing**
 - Encapsulating packet into frame, adding header, trailer
 - Using MAC addresses, rather than IP addresses
- **Error detection**
 - Errors caused by signal attenuation, noise.
 - Receiver detecting presence of errors
- Error correction
 - Receiver correcting errors without retransmission
- Flow control
 - Pacing between adjacent sending and receiving nodes

Encoding

- **Signals propagate over physical links**
 - Source node encodes the bits into a signal
 - Receiving node decodes the signal back into bits
- **Simplify some electrical engineering details**
 - Assume two discrete signals, high and low
 - E.g., could correspond to two different voltages
- **Simple approach**
 - High for a 1, low for a 0

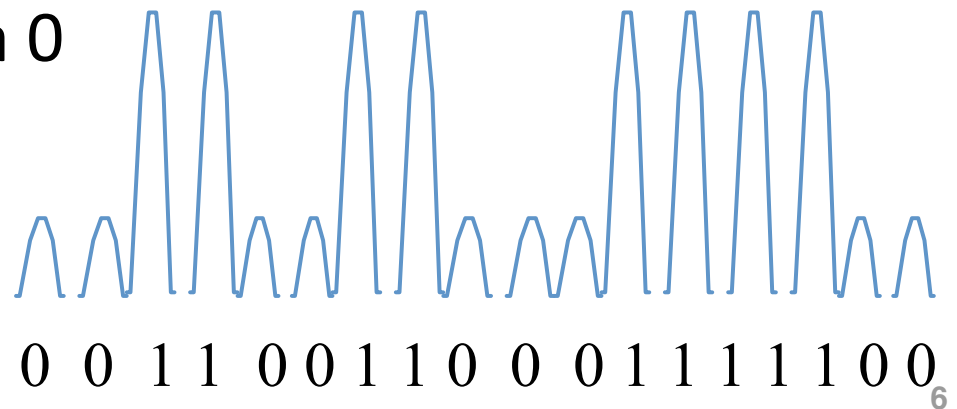

Problem With Simple Approach

- Long strings of 0s or 1s introduce problems
 - No transitions from low-to-high, or high-to-low
- Receiver keeps average of signal it has received
 - Uses the average to distinguish between high and low
 - Long flat strings make receiver sensitive to small change
- Transitions also necessary for clock recovery
 - Receiver uses transitions to derive its own clock
 - Long flat strings do not produce any transitions
 - Can lead to clock drift at the receiver
- Alternatives (see Section 2.2)
 - Non-return to zero inverted: Transition for 1, None for 0
 - Manchester encoding: clock XOR NRZ: $L \rightarrow H$ (0), $H \rightarrow L$ (1)

Framing

- Break sequence of bits into a frame
 - Typically implemented by the network adaptor
- Sentinel-based
 - Delineate frame with special pattern (e.g., 01111110)



- Problem: what if special patterns occurs within frame?
- Solution: escaping the special characters
 - E.g., sender always inserts a 0 after five 1s
 - ... and receiver always removes a 0 appearing after five 1s
- Similar to escaping special characters in C programs

Framing (Continued)

- Counter-based

- Include the payload length in the header
- ... instead of putting a sentinel at the end
- Problem: what if the count field gets corrupted?
 - Causes receiver to think the frame ends at a different place
- Solution: catch later when doing error detection
 - And wait for the next sentinel for the start of a new frame

- Clock-based

- Make each frame a fixed size
- No ambiguity about start and end of frame
- But, may be wasteful

Error Detection


- Errors are unavoidable
 - Electrical interference, thermal noise, etc.
- Error detection
 - Transmit extra (redundant) information
 - Use redundant information to detect errors
 - Extreme case: send two copies of the data
 - Trade-off: accuracy vs. overhead
- Techniques for detecting errors
 - Parity checking
 - Checksum
 - Cyclic Redundancy Check (CRC)

Error Detection Techniques

- **Parity check**
 - Add an extra bit to a 7-bit code
 - Odd parity: ensure an odd number of 1s
 - E.g., 0101011 becomes 0101011**1**
 - Even parity: ensure an even number of 1s
 - E.g., 0101011 becomes 0101011**0**
- **Checksum**
 - Treat data as a sequence of 16-bit words
 - Compute a sum of all 16-bit words, with no carries
 - Transmit the sum along with the packet
- **Cyclic Redundancy Check (CRC)**
 - See Section 2.4.3

Point-to-Point vs. Broadcast Media


- **Point-to-point**
 - PPP for dial-up access
 - Point-to-point link between Ethernet switch and host
- **Broadcast (shared wire or medium)**
 - Traditional Ethernet
 - 802.11 wireless LAN



shared wire
(e.g. Ethernet)



shared wireless
(e.g. Wavelan)



satellite



cocktail party


Multiple Access Protocol

- **Single shared broadcast channel**
 - Avoid having multiple nodes speaking at once
 - Otherwise, collisions lead to garbled data
- **Multiple access protocol**
 - Distributed algorithm for sharing the channel
 - Algorithm determines which node can transmit
- **Classes of techniques**
 - Channel partitioning: divide channel into pieces
 - Taking turns: passing a token for the right to transmit
 - Random access: allow collisions, and then recover

Channel Partitioning: TDMA

TDMA: time division multiple access


- Access to channel in "rounds"
 - Each station gets fixed length slot in each round
- Time-slot length is packet transmission time
 - Unused slots go idle
- Example: 6-station LAN with slots 1, 3, and 4

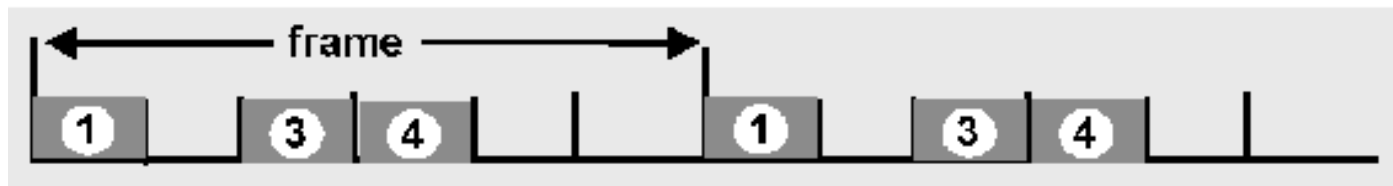

Channel Partitioning: FDMA

FDMA: frequency division multiple access

- Channel spectrum divided into frequency bands
 - Each station assigned fixed frequency band
- Unused transmission time in bands go idle
- Example: 6-station LAN with bands 1, 3, and 4

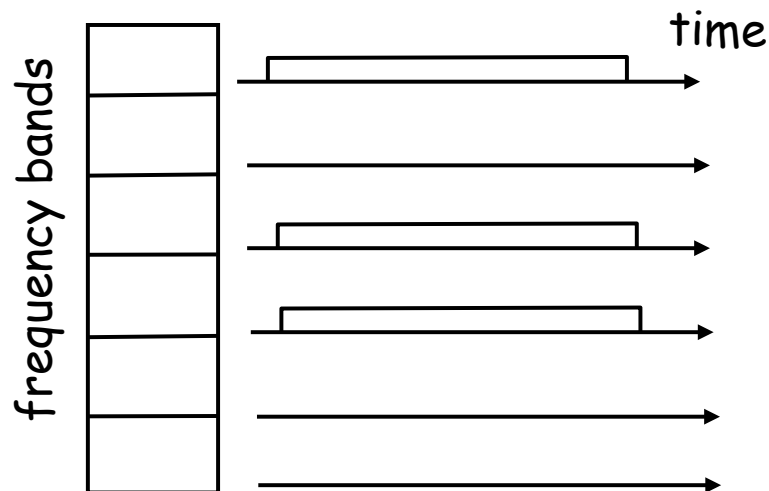


“Taking Turns” MAC protocols

Polling

- Master node “invites” slave nodes to transmit in turn
- Concerns:
 - Polling overhead
 - Latency
 - Single point of failure (master)

Token passing

- Control token passed from one node to next sequentially
- Token message
- Concerns:
 - Token overhead
 - Latency
 - Single point of failure (token)

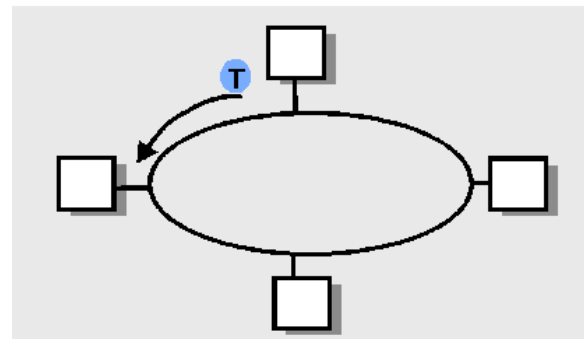

Random Access Protocols

- When node has packet to send
 - Transmit at full channel data rate R .
 - No a priori coordination among nodes
- Two or more transmitting nodes → “collision”
- Random access MAC protocol specifies:
 - How to detect collisions
 - How to recover from collisions
- Examples
 - ALOHA and Slotted ALOHA
 - CSMA, CSMA/CD, CSMA/CA

Key Ideas of Random Access

- **Carrier Sense (CS)**
 - *Listen before speaking, and don't interrupt*
 - Checking if someone else is already sending data
 - ... and waiting till the other node is done
- **Collision Detection (CD)**
 - *If someone else starts talking at the same time, stop*
 - Realizing when two nodes are transmitting at once
 - ...by detecting that the data on the wire is garbled
- **Randomness**
 - *Don't start talking again right away*
 - Waiting for a random time before trying again

Slotted ALOHA


Assumptions

- All frames same size
- Time divided into equal slots (time to transmit a frame)
- Nodes start to transmit frames only at start of slots
- Nodes are synchronized
- If two or more nodes transmit, all nodes detect collision

Operation

- When node obtains fresh frame, transmits in next slot
- No collision: node can send new frame in next slot
- Collision: node retransmits frame in each subsequent slot with probability p until success

Slotted ALOHA

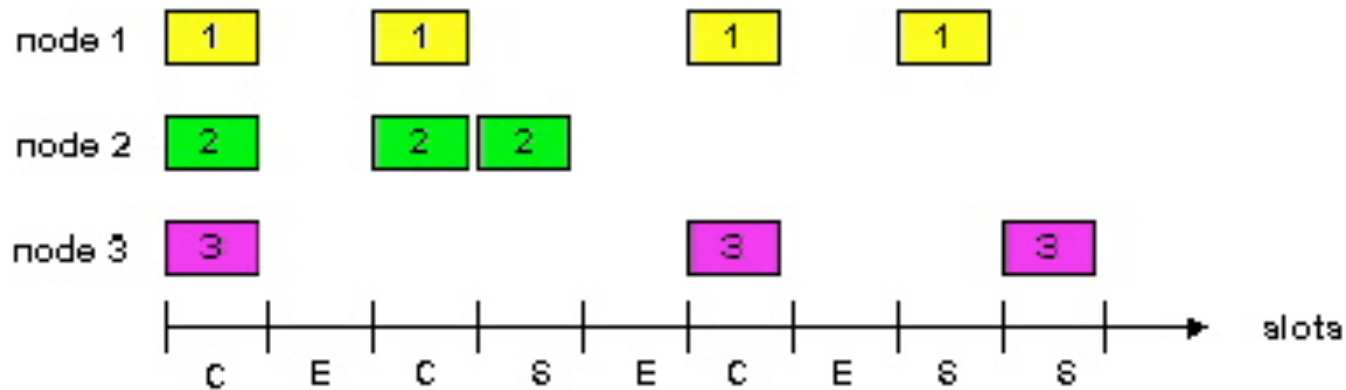

Pros

- Single active node can continuously transmit at full rate of channel
- Highly decentralized: only slots in nodes need to be in sync
- Simple

Cons

- Collisions, wasting slots
- Idle slots
- Nodes may be able to detect collision in less than time to transmit packet
- Clock synchronization


CSMA (Carrier Sense Multiple Access)

- Collisions hurt the efficiency of ALOHA protocol
 - At best, channel is useful 37% of the time
- CSMA: listen before transmit
 - If channel sensed idle: transmit entire frame
 - If channel sensed busy, defer transmission
- Human analogy: don't interrupt others!

CSMA Collisions

Collisions *can* still occur:
propagation delay means
two nodes may not hear
each other's transmission


Collision: entire packet
transmission time wasted

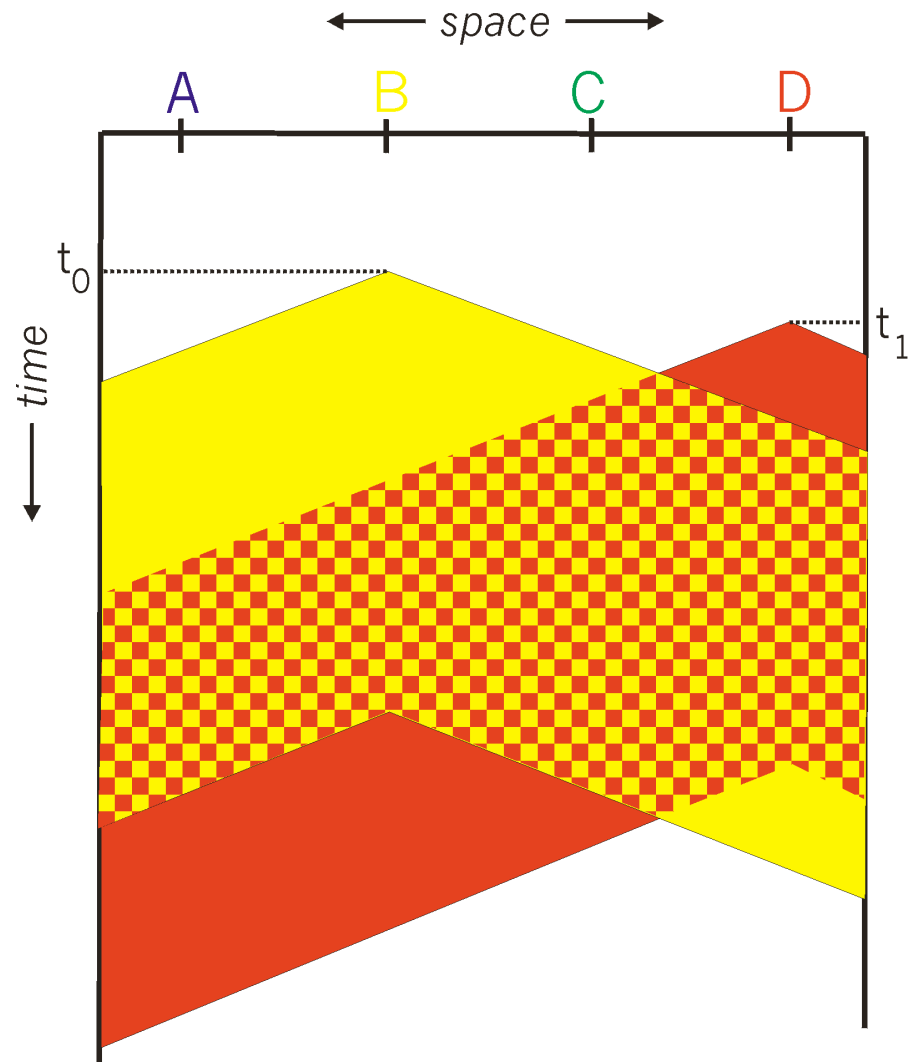

CSMA/CD (Collision Detection)

- CSMA/CD: carrier sensing, deferral as in CSMA
 - Collisions detected within short time
 - Colliding transmissions aborted, reducing wastage
- Collision detection
 - Easy in wired LANs: measure signal strengths, compare transmitted, received signals
 - Difficult in wireless LANs: receiver shut off while transmitting
- Human analogy: the polite conversationalist

CSMA/CD Collision Detection

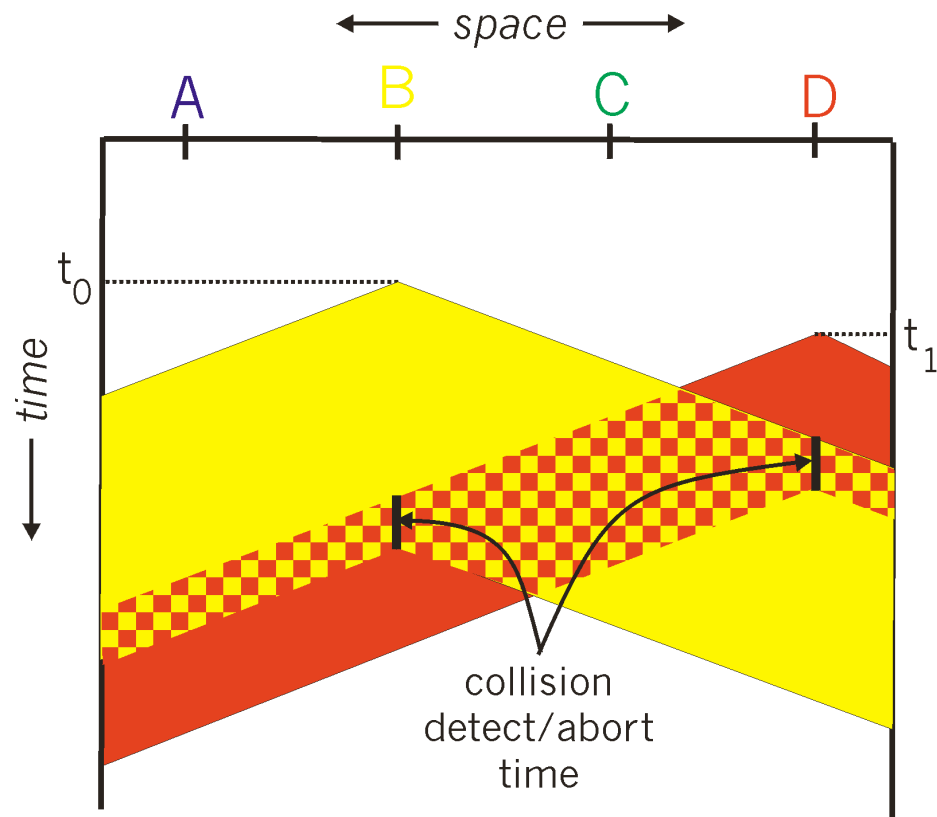


Three Ways to Share the Media

- **Channel partitioning MAC protocols:**
 - Share channel efficiently and fairly at high load
 - Inefficient at low load: delay in channel access, $1/N$ bandwidth allocated even if only 1 active node!
- **“Taking turns” protocols**
 - Eliminates empty slots without causing collisions
 - Vulnerable to failures (e.g., failed node or lost token)
- **Random access MAC protocols**
 - Efficient at low load: single node can fully utilize channel
 - High load: collision overhead

Ethernet

- Dominant wired LAN technology
- First widely used LAN technology
- Simpler, cheaper than token LANs and ATM
- Kept up with speed race: 10 Mbps – 10 Gbps

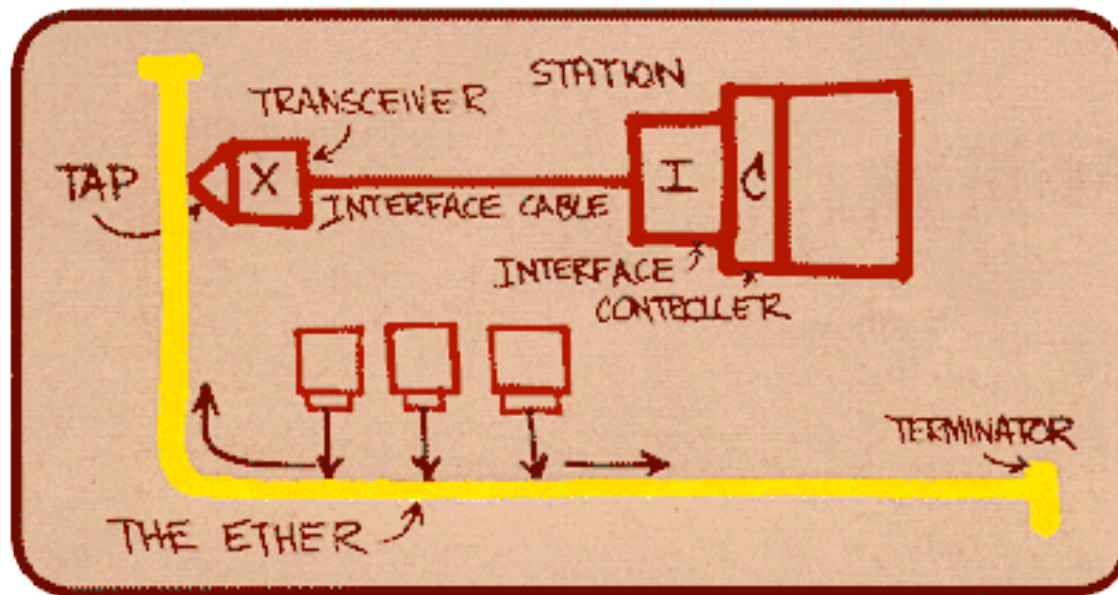


Metcalfe's
Ethernet
sketch

Ethernet Uses CSMA/CD


- **Carrier Sense: wait for link to be idle**
 - Channel idle: start transmitting
 - Channel busy: wait until idle
- **Collision Detection: listen while transmitting**
 - No collision: transmission is complete
 - Collision: abort transmission, and send jam signal
- **Random access: exponential back-off**
 - After collision, wait a random time before trying again
 - After m^{th} collision, choose K randomly from $\{0, \dots, 2^m - 1\}$
 - ... and wait for $K * 512$ bit times before trying again

Limitations on Ethernet Length

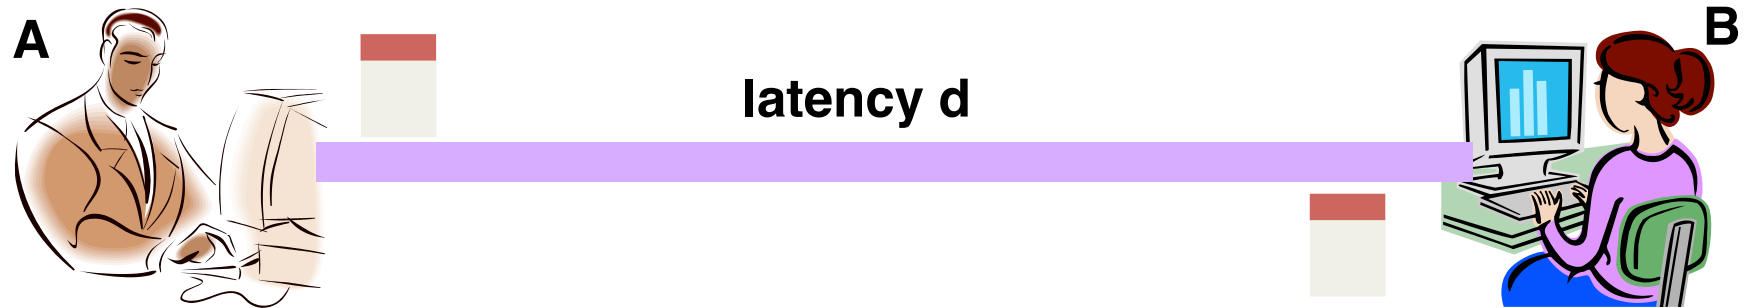

- Latency depends on physical length of link
 - Time to propagate a packet from one end to the other
- Suppose A sends a packet at time t
 - And B sees an idle line at a time just before $t+d$
 - ... so B happily starts transmitting a packet
- B detects a collision, and sends jamming signal
 - But A doesn't see collision till $t+2d$


Limitations on Ethernet Length

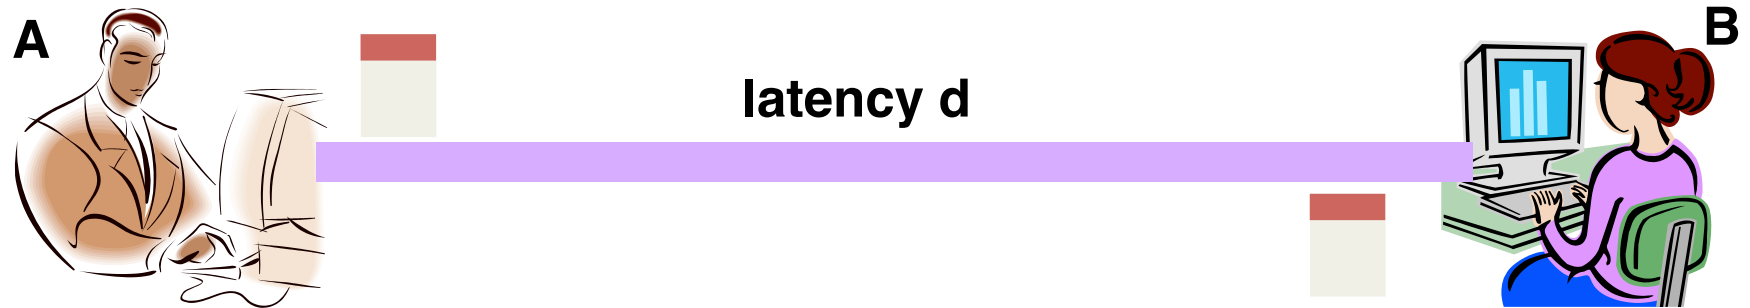

- **A needs to wait for time $2d$ to detect collision**
 - So, A should keep transmitting during this period
 - ... and keep an eye out for a possible collision
- **Imposes restrictions on Ethernet**
 - Maximum length of the wire: 2500 meters
 - Minimum length of the packet: 512 bits (64 bytes)

Ethernet Frame Structure


- Sending adapter encapsulates packet in frame

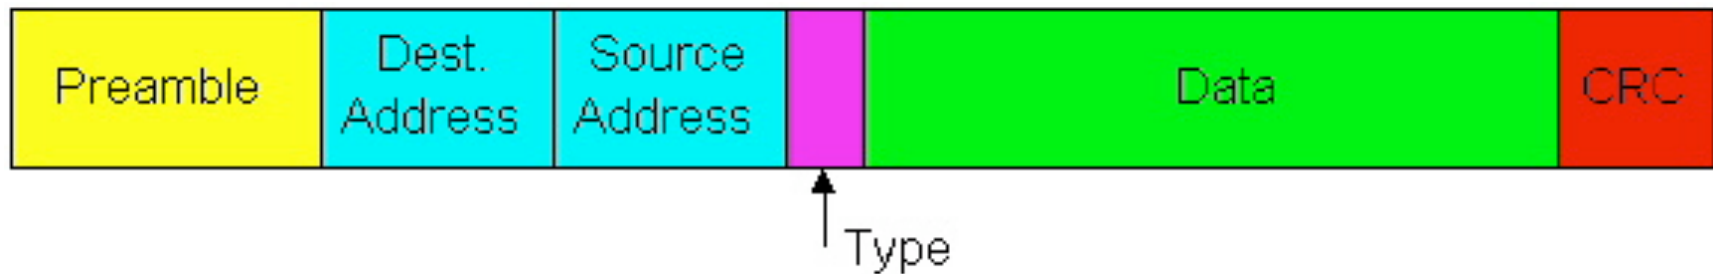

- **Preamble: synchronization**
 - Seven bytes with pattern 10101010, followed by one byte with pattern 10101011
 - Used to synchronize receiver, sender clock rates

Ethernet Frame Structure (Continued)

- **Addresses:** source and destination MAC addresses
 - Adaptor passes frame to network-level protocol
 - If destination address matches the adaptor
 - Or the destination address is the broadcast address
 - Otherwise, adapter discards frame
- **Type:** indicates the higher layer protocol
 - Usually IP, but also Novell IPX, AppleTalk, ...
- **CRC:** cyclic redundancy check
 - Checked at receiver
 - If error is detected, the frame is simply dropped

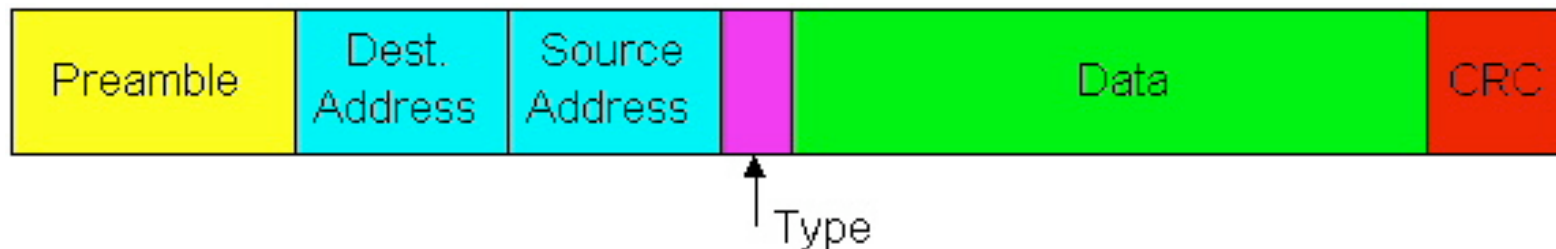


Unreliable, Connectionless Service

- **Connectionless**
 - No handshaking b/w sending and receiving adapter
- **Unreliable**
 - Receiving adapter doesn't send ACKs or NACKs
 - Packets passed to network layer can have gaps
 - Gaps will be filled if application is using TCP
 - Otherwise, the application will see the gaps


Hubs: Physical-Layer Repeaters

- Hubs are physical-layer repeaters
 - Bits coming from one link go out all other links
 - At the same rate, with no frame buffering
 - No CSMA/CD at hub: adapters detect collisions

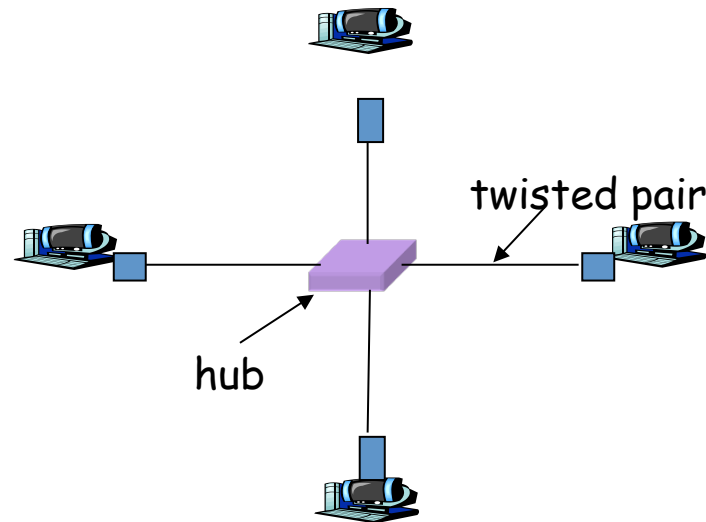

Interconnecting with Hubs

- Backbone hub interconnects LAN segments
- All packets seen everywhere, forming one large collision domain
- Can't interconnect Ethernets of different speeds

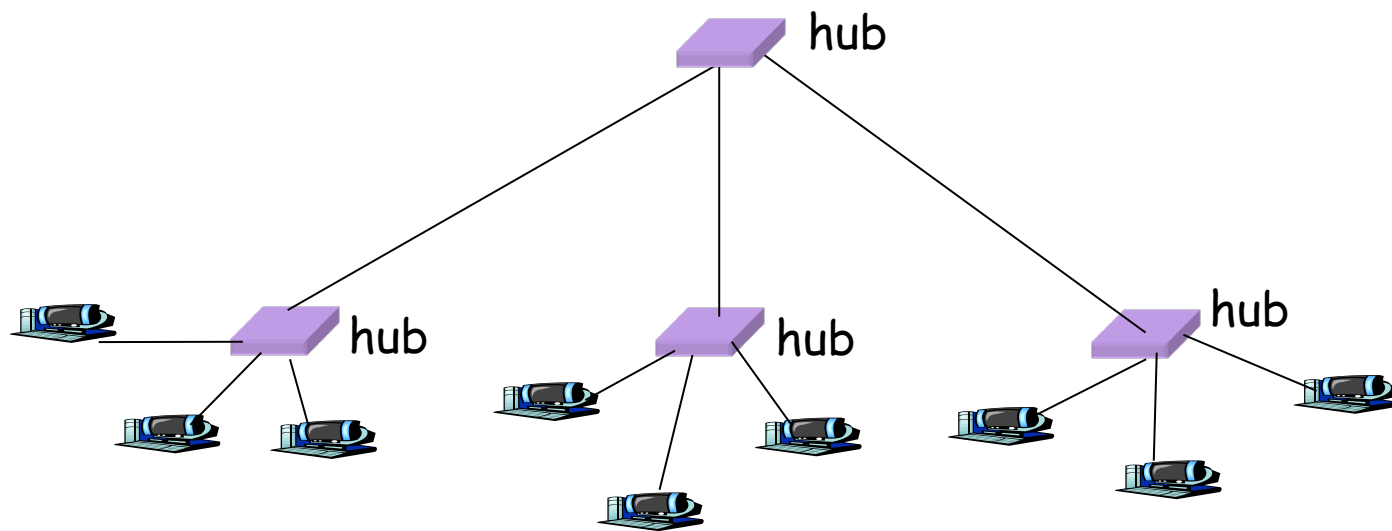


Switch

- **Link layer device**
 - Stores and forwards Ethernet frames
 - Examines frame header and selectively forwards frame based on MAC dest address
 - When frame is to be forwarded on segment, uses CSMA/CD to access segment
- **Transparent**
 - Hosts are unaware of presence of switches
- **Plug-and-play, self-learning**
 - Switches do not need to be configured

Switch: Traffic Isolation

- Switch breaks subnet into LAN segments
- Switch filters packets
 - Same-LAN-segment frames not usually forwarded onto other LAN segments
 - Segments become separate collision domains

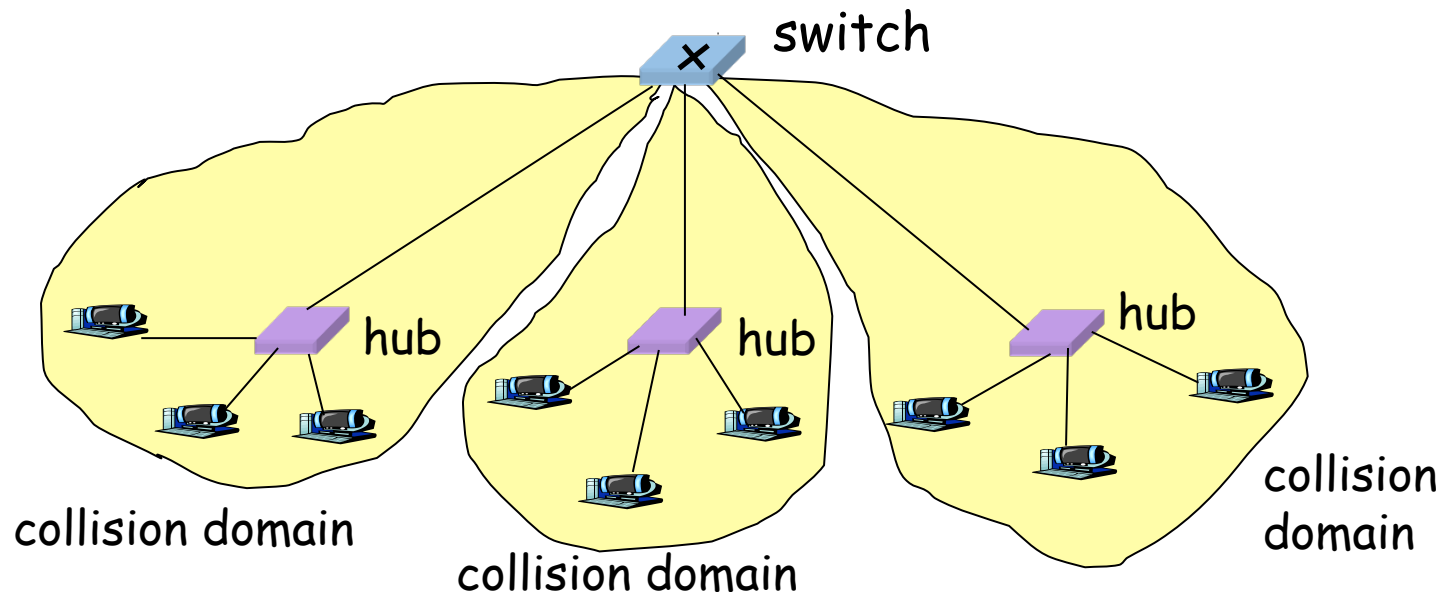

Benefits of Ethernet

- Easy to administer and maintain
- Inexpensive
- Increasingly higher speed
- Moved from shared media to switches
 - Change everything except the frame format
 - A good general lesson for evolving the Internet

Conclusions

- IP runs on a variety of link layer technologies
 - Point-to-point links vs. shared media
 - Wide varieties within each class
- Link layer performs key services
 - Encoding, framing, and error detection
 - Optionally error correction and flow control
- Shared media introduce interesting challenges
 - Decentralized control over resource sharing
 - Partitioned channel, taking turns, and random access
 - Ethernet as a wildly popular example