



Sampling, Resampling, and Warping

Adam Finkelstein

Princeton University

COS 426, Spring 2019

Digital Image Processing




- Changing pixel values
 - Linear: scale, offset, etc.
 - Nonlinear: gamma, saturation, etc.
 - Histogram equalization
- Filtering over neighborhoods
 - Blur & sharpen
 - Detect edges
 - Median
 - Bilateral filter
- Moving image locations
 - Scale
 - Rotate
 - Warp
- Combining images
 - Composite
 - Morph
- Quantization
- Spatial / intensity tradeoff
 - Dithering

Image Warping



- Move pixels of an image

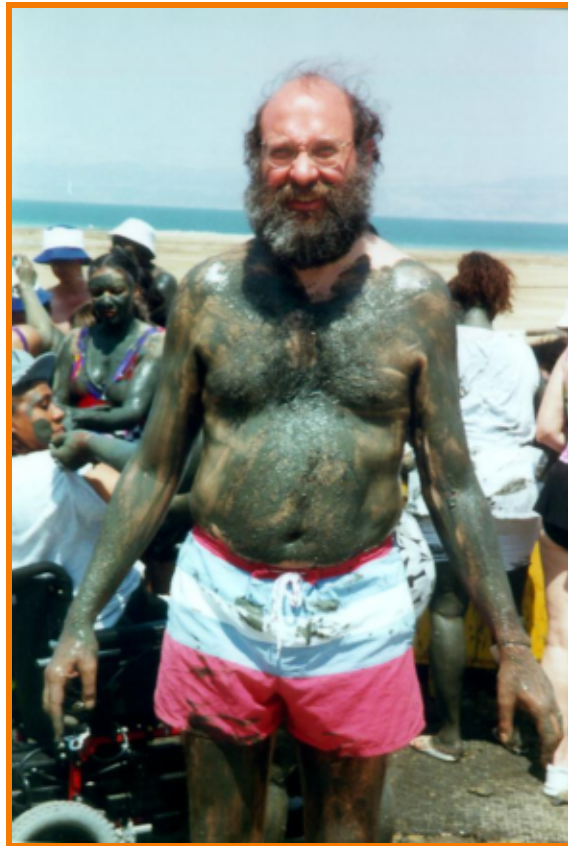

Source image

→
Warp




Destination image

Image Warping



- Issues:
 - Specifying where every pixel goes (mapping)

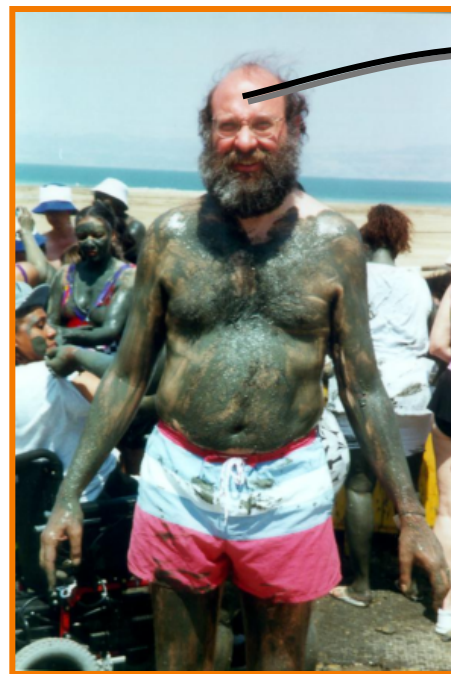

Source image

Warp



Destination image

Image Warping



- Issues:
 - Specifying where every pixel goes (mapping)
 - Computing colors at destination pixels (resampling)


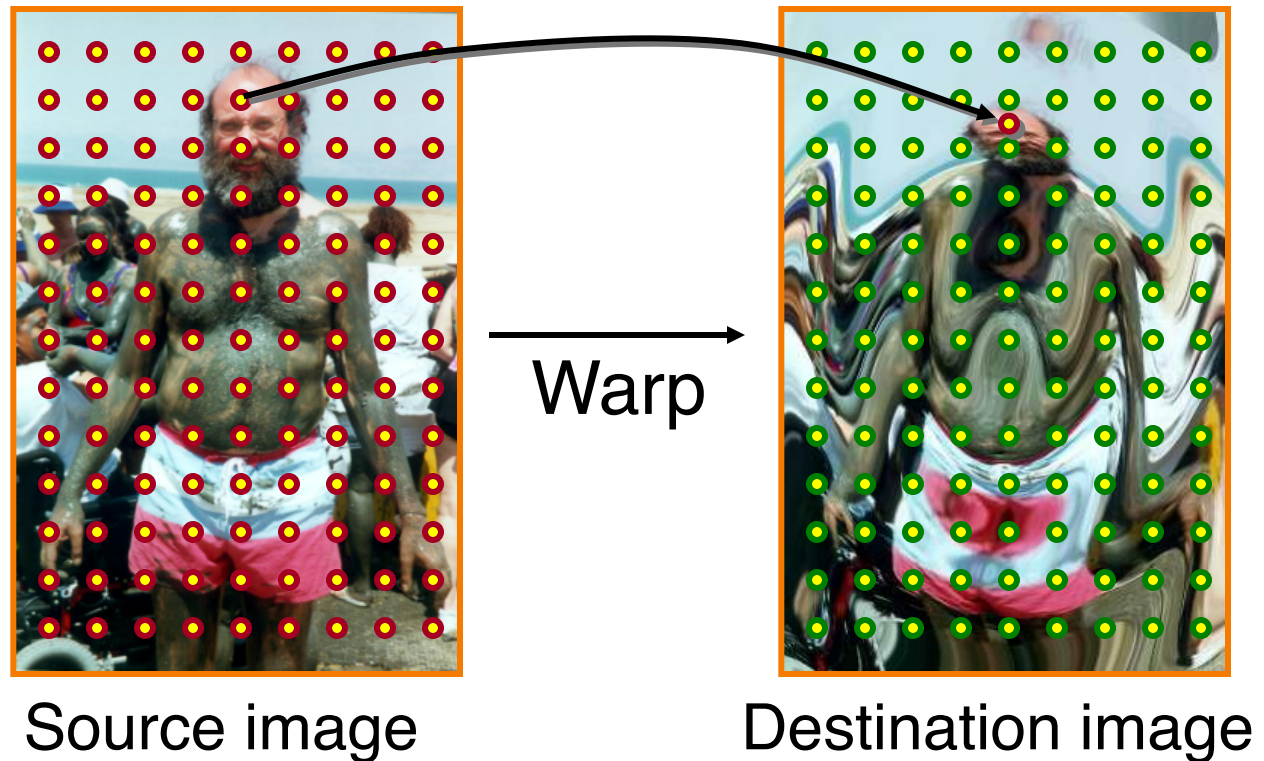


Image Warping




- Issues:
 - Specifying where every pixel goes (mapping)
 - Computing colors at destination pixels (resampling)

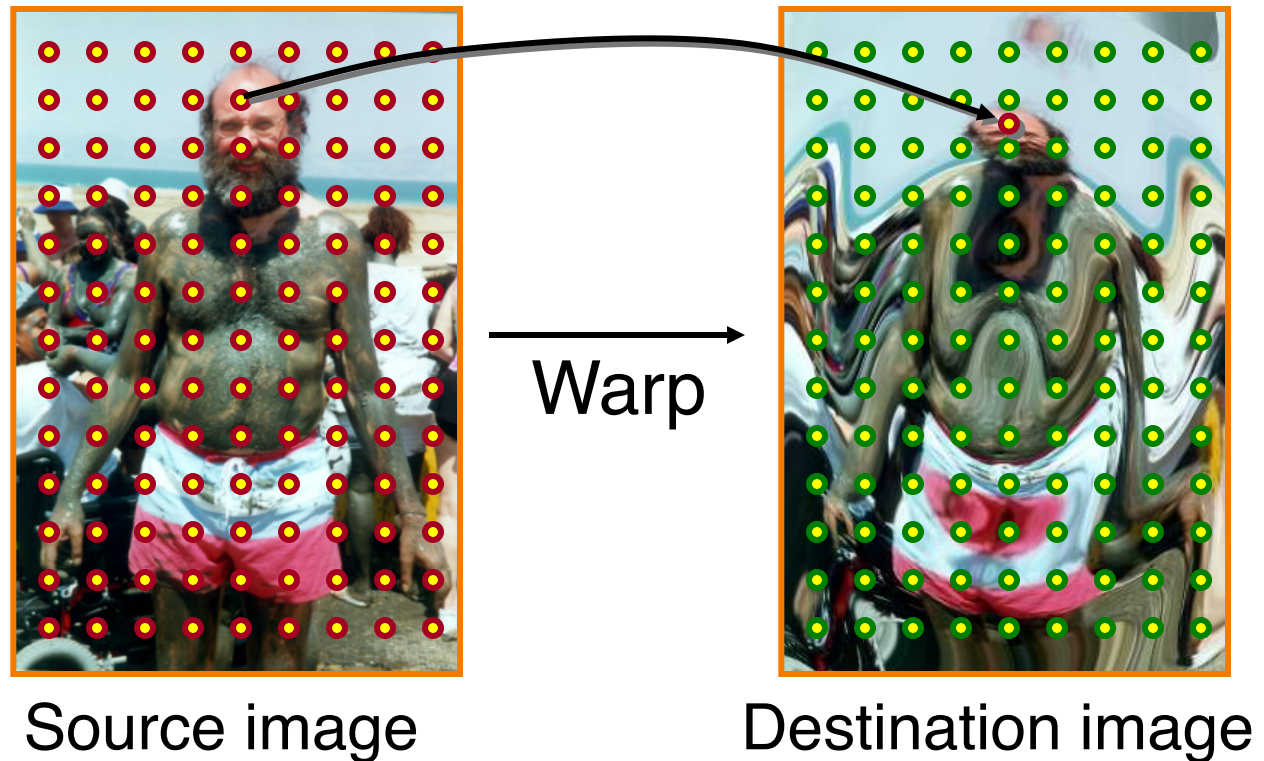


Two Options

- Forward mapping

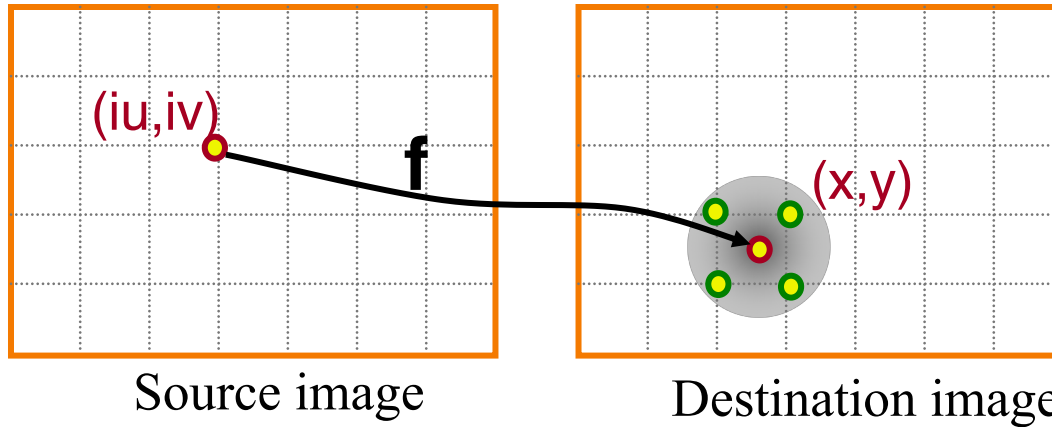


- Reverse mapping

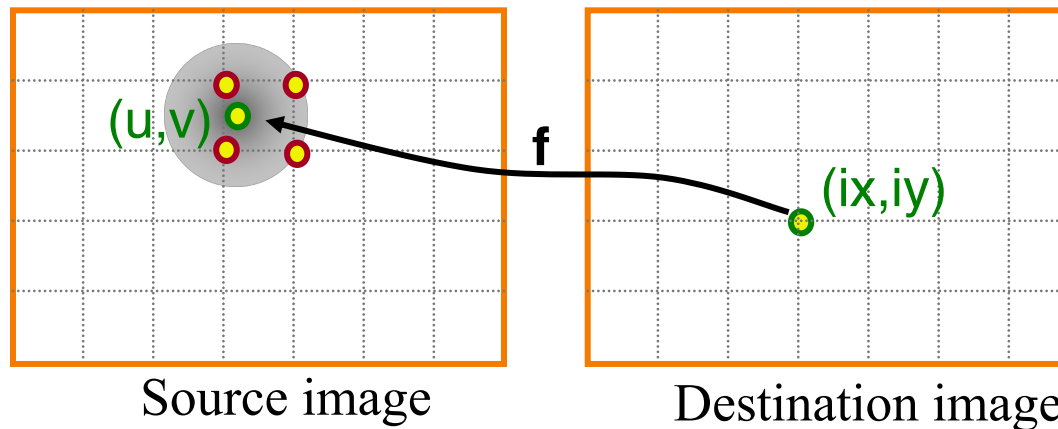

Mapping




- Define transformation
 - Describe the destination (x,y) for every source (u,v) (actually vice-versa, if reverse mapping)

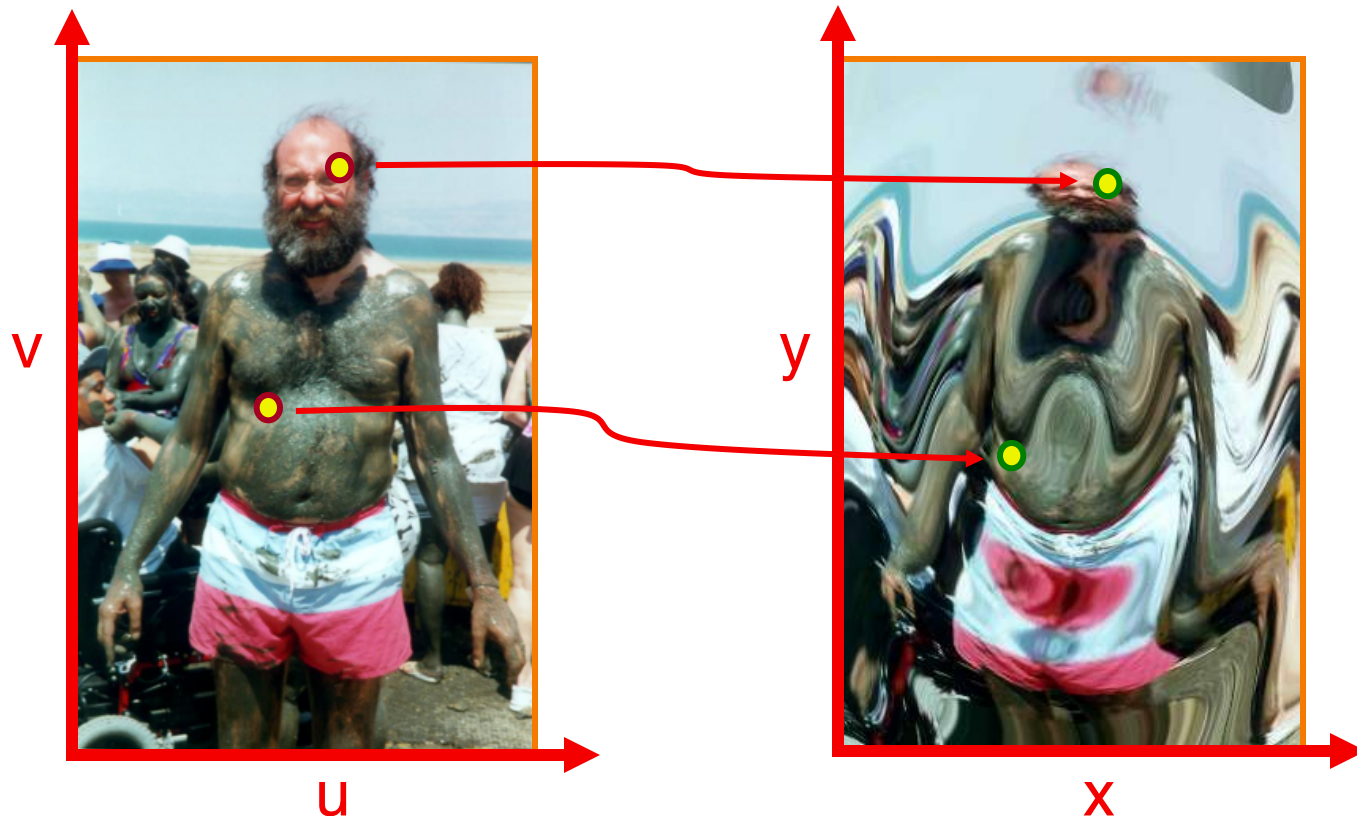


Parametric Mappings

- Scale by *factor*:
 - $x = factor * u$
 - $y = factor * v$

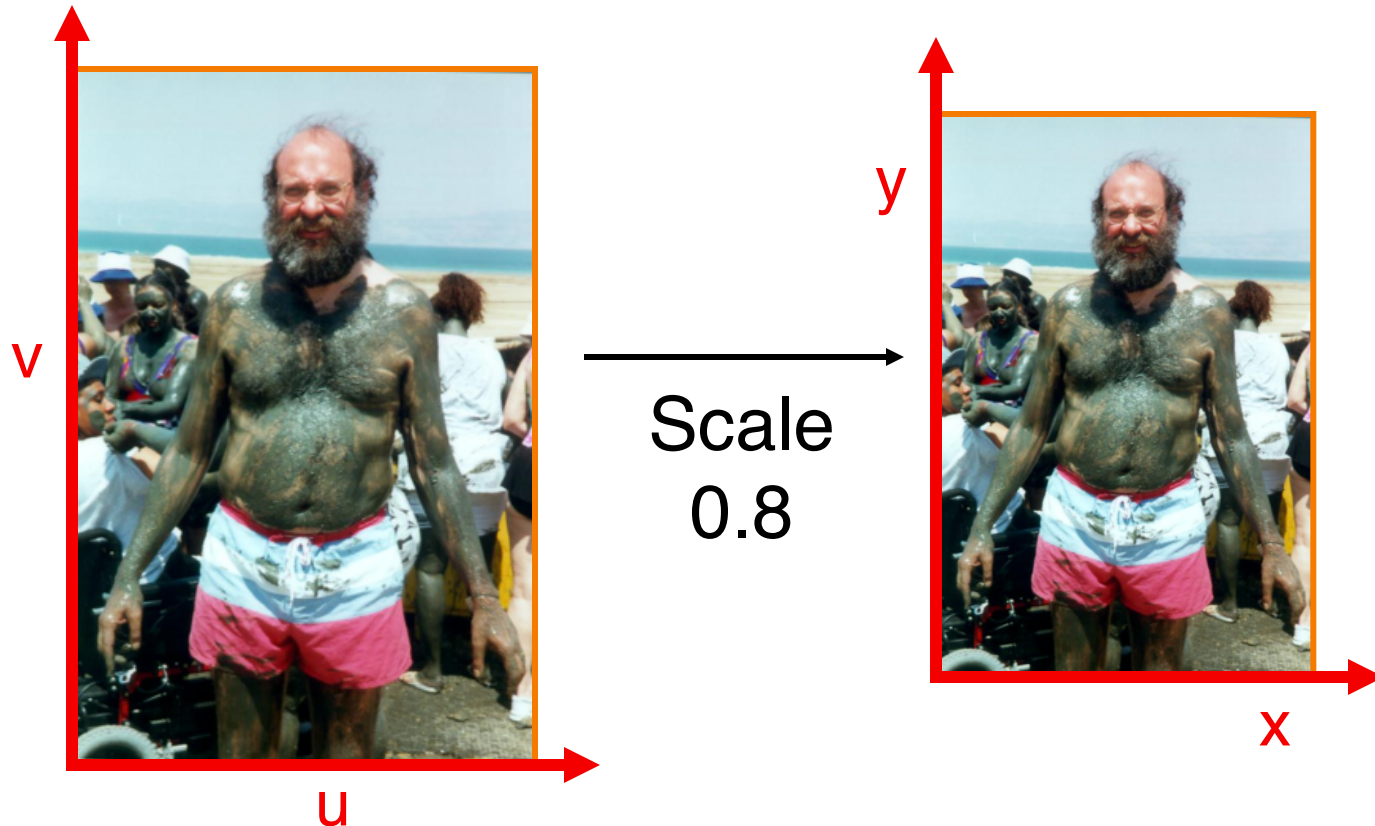

Parametric Mappings

- Rotate by Θ degrees:
 - $x = u \cos \Theta - v \sin \Theta$
 - $y = u \sin \Theta + v \cos \Theta$

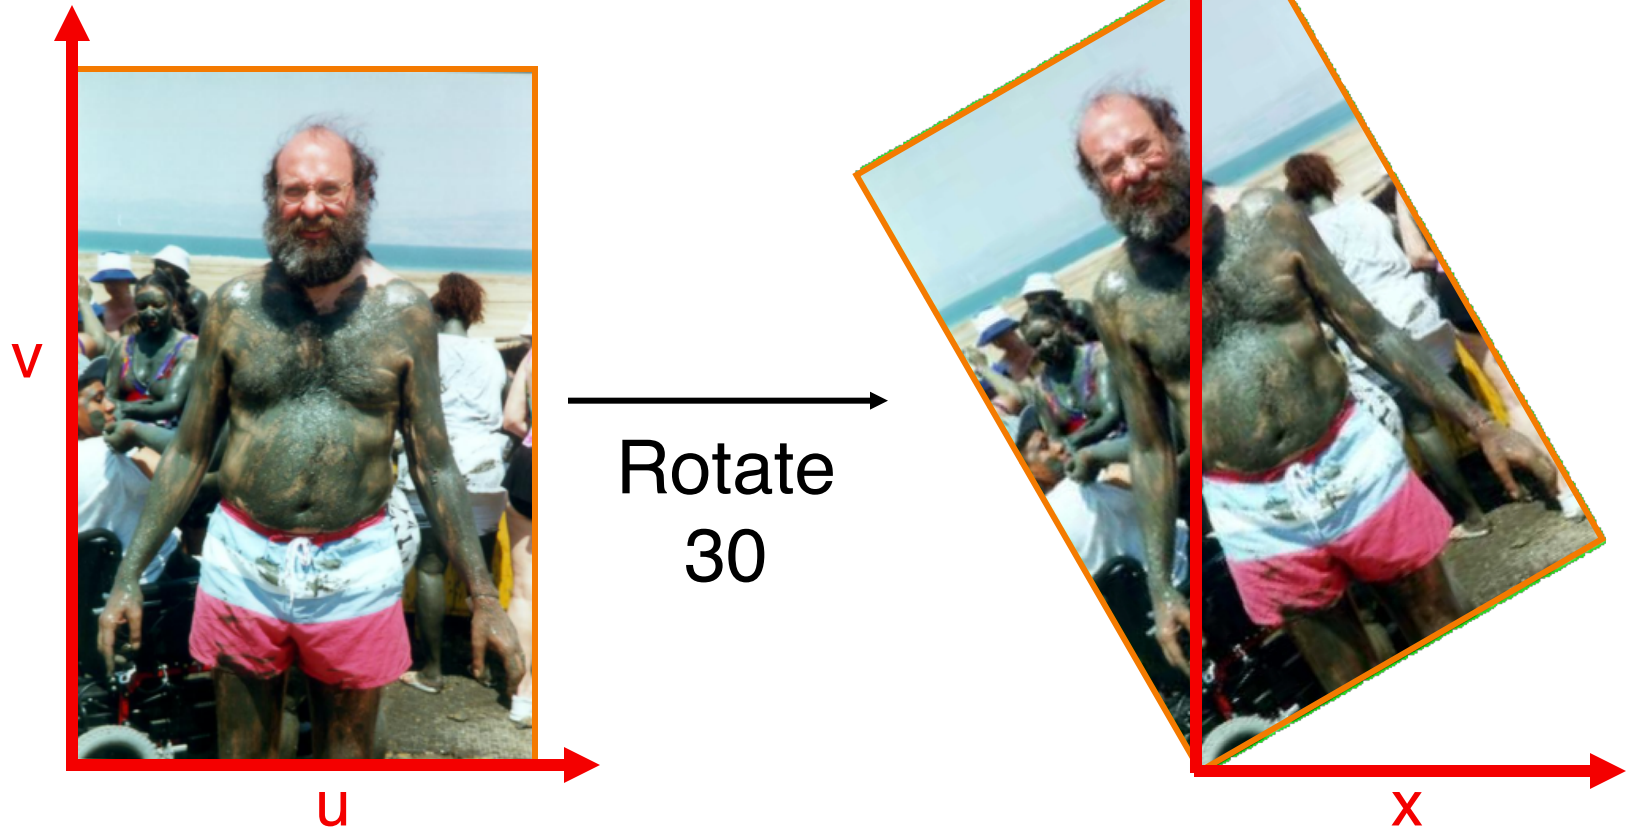




Parametric Mappings


- Shear in X by *factor*:

- $x = u + \textit{factor} * v$
- $y = v$

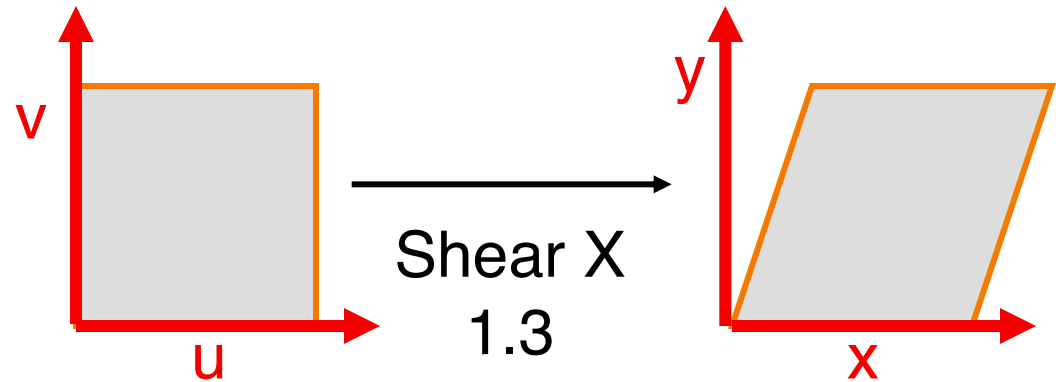

- Shear in Y by *factor*:


- $x = u$
- $y = v + \textit{factor} * u$

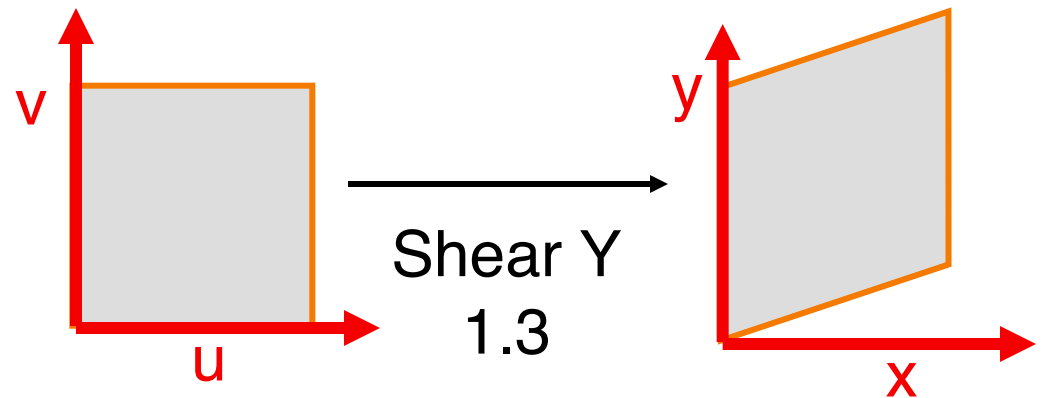

Other Parametric Mappings



- Any function of u and v :
 - $x = f_x(u,v)$
 - $y = f_y(u,v)$

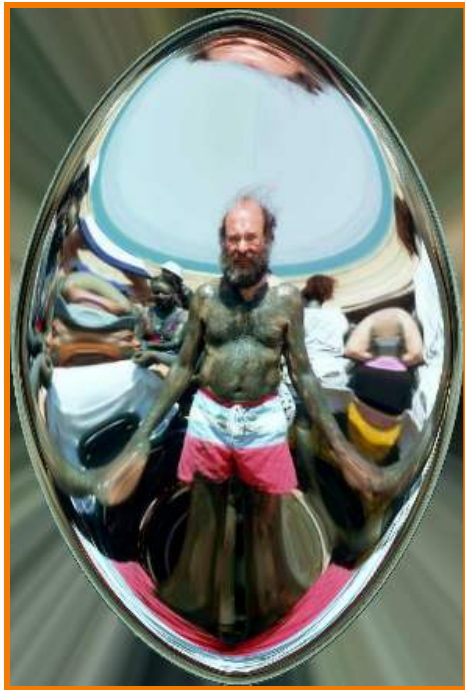

Fish-eye



“Swirl”



“Rain”

COS426 Examples



Aditya Bhaskara




Wei Xiang

More COS426 Examples



Sid Kapur

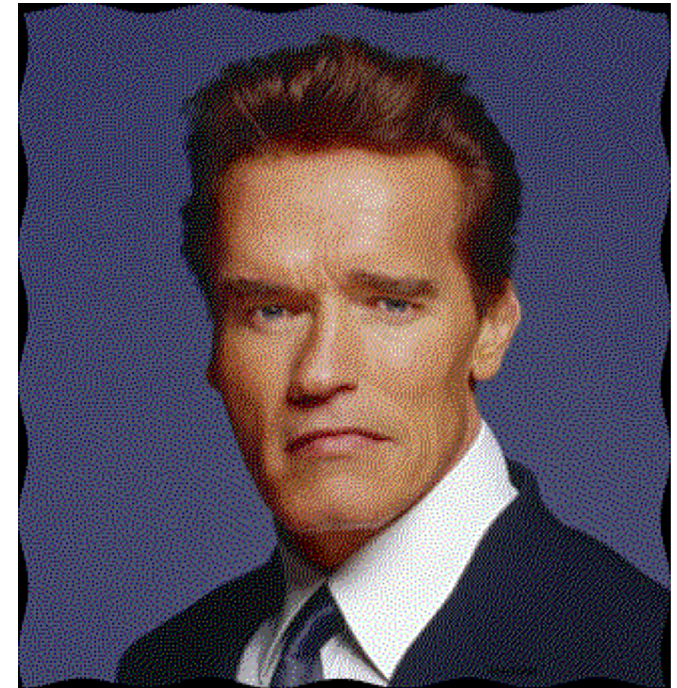

Eirik Bakke




Michael Oranato


Point Correspondence Mappings



- Mappings implied by correspondences:
 - A A'
 - B B' (extrapolate by, e.g., radial basis functions)
 - C C'

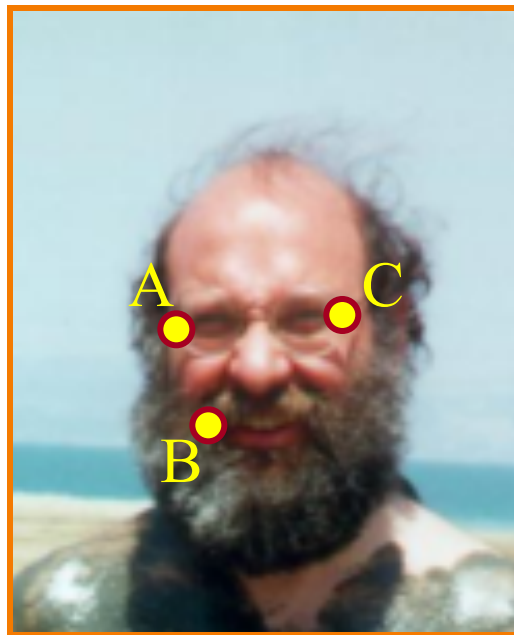


→
Warp

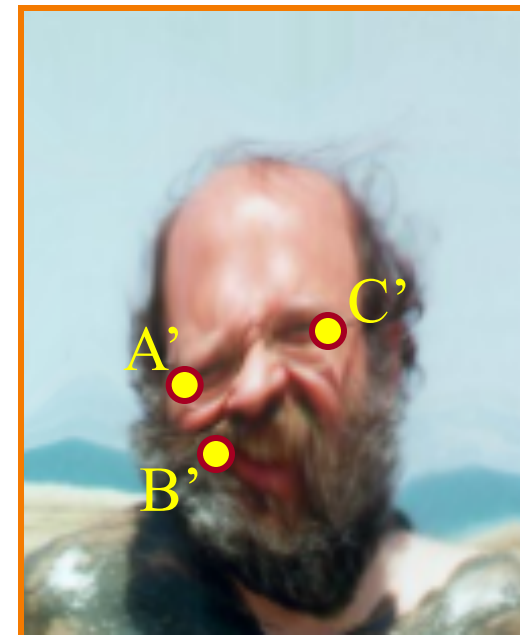

Line Correspondence Mappings



[Beier&Neeley'92] use pairs of lines to specify warp

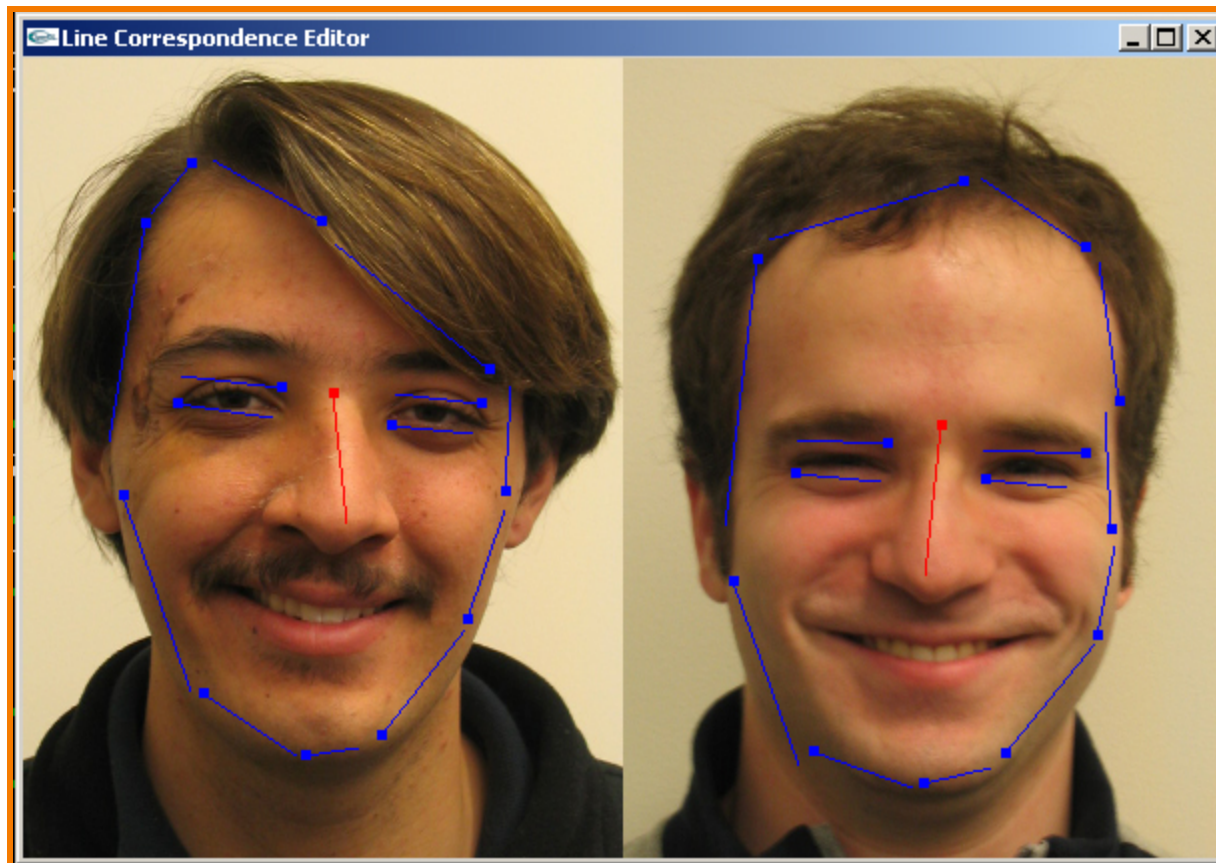


(more on this in next lecture)

Image Warping



- Issues:
 - Specifying where every pixel goes (mapping)
 - Computing colors at destination pixels (resampling)


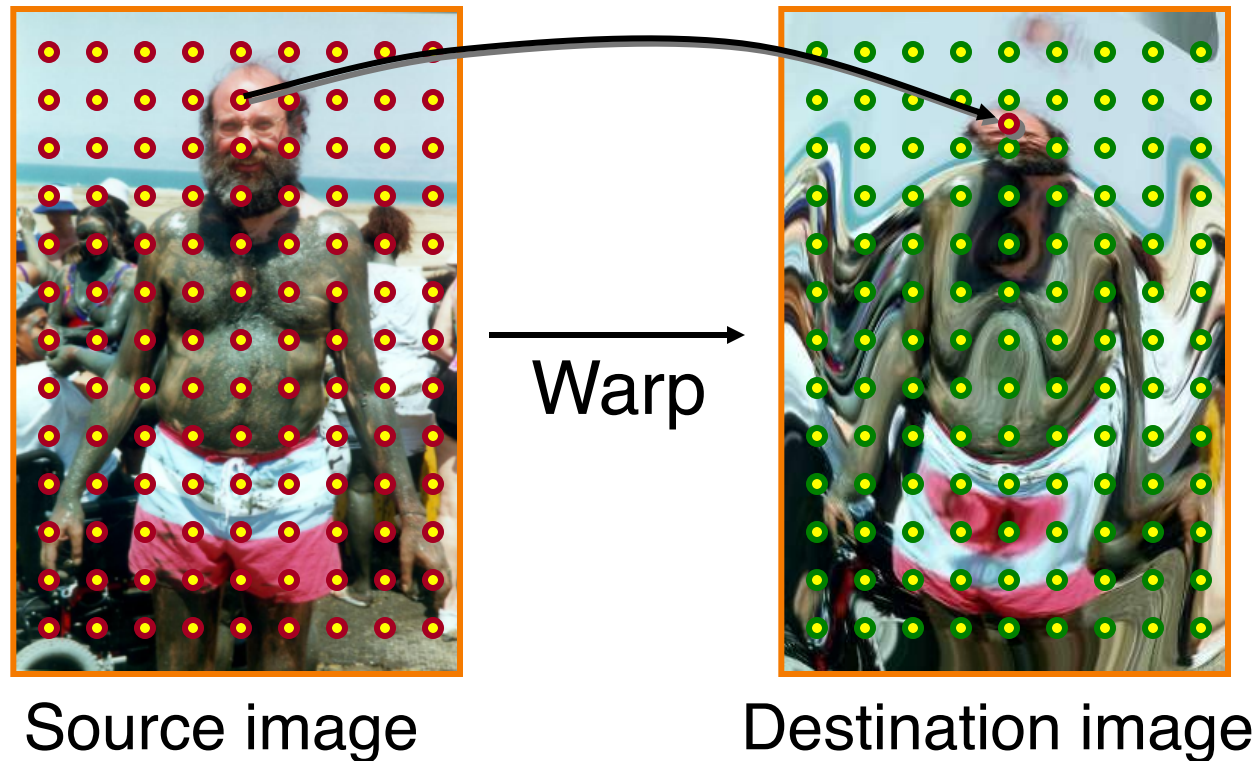


Digital Image Processing




When implementing operations that move pixels, must account for the fact that digital images are **sampled** versions of continuous ones

Sampling and Reconstruction

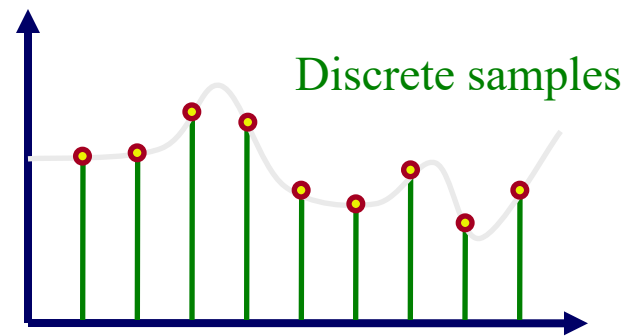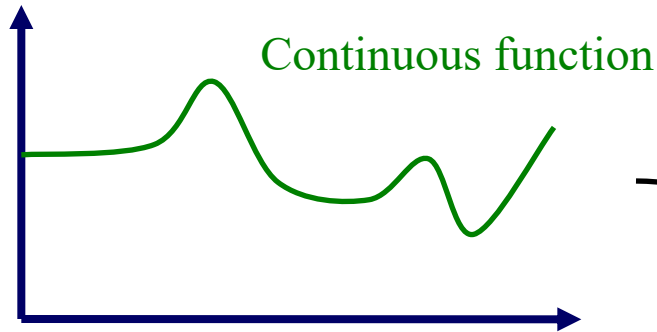


Sampling


Sampling and Reconstruction

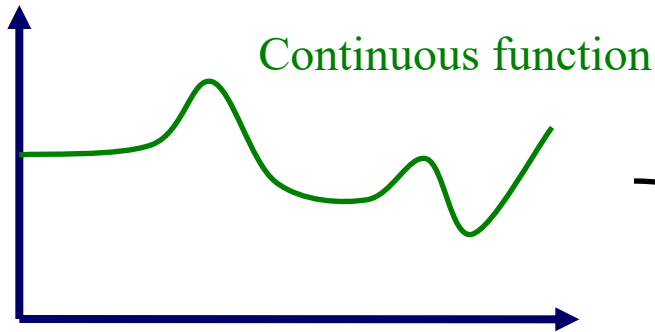

Sampling

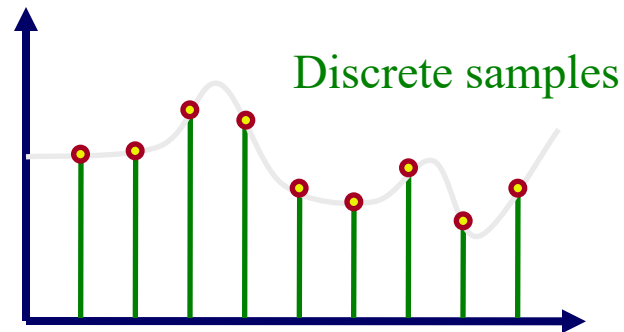

Reconstruction

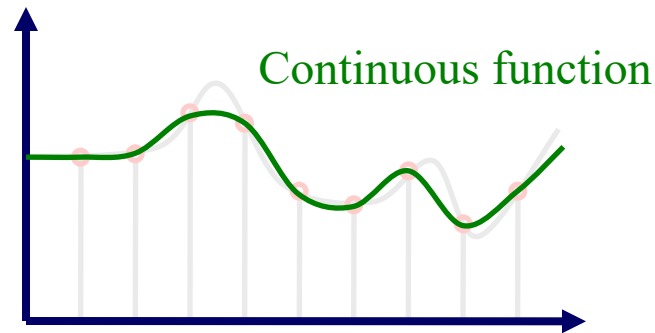

Sampling and Reconstruction

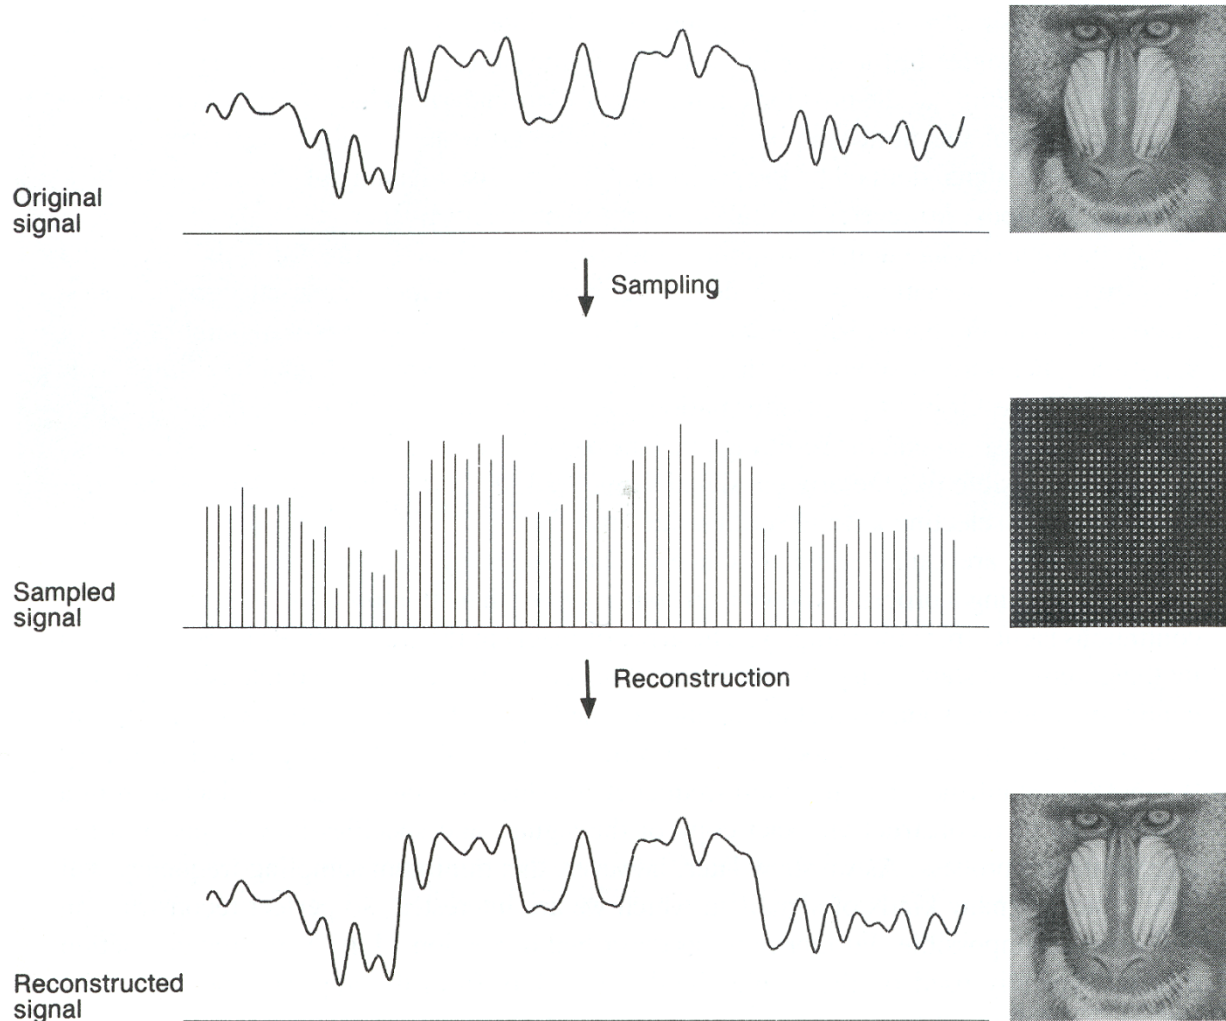


Figure 19.9 FvDFH


Sampling Theory



How many samples are enough?

- How many samples needed to represent a signal?
- What can be reconstructed for a given sampling rate?

What happens when we use too few samples?

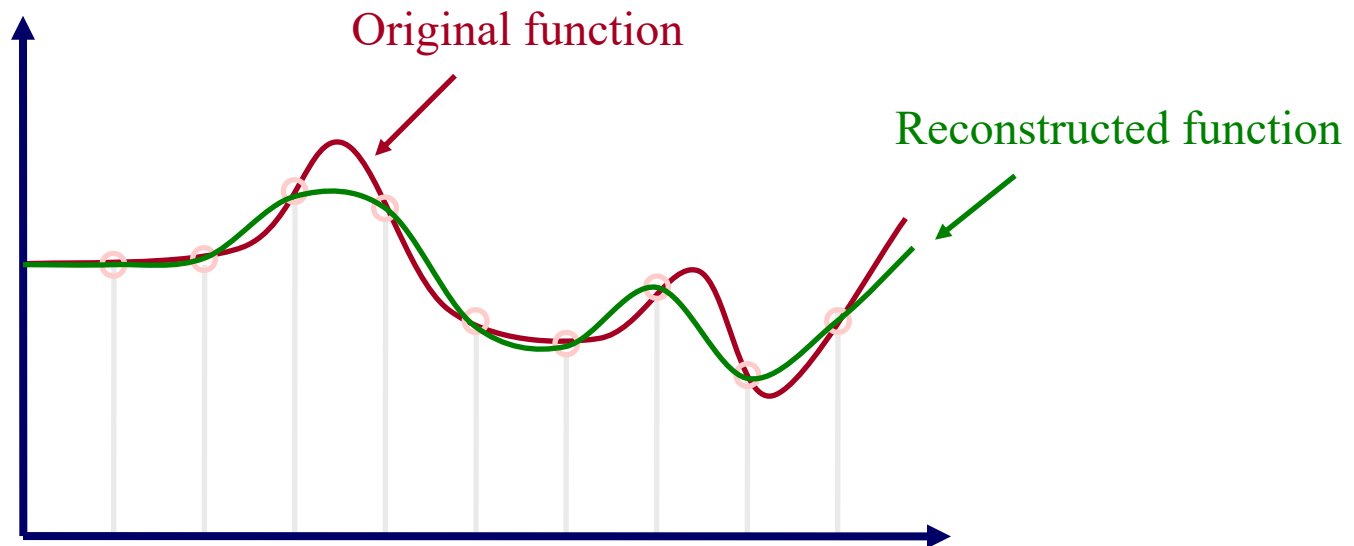


Sampling Theory



What happens when we use too few samples?

- **Aliasing:** high frequencies masquerade as low ones

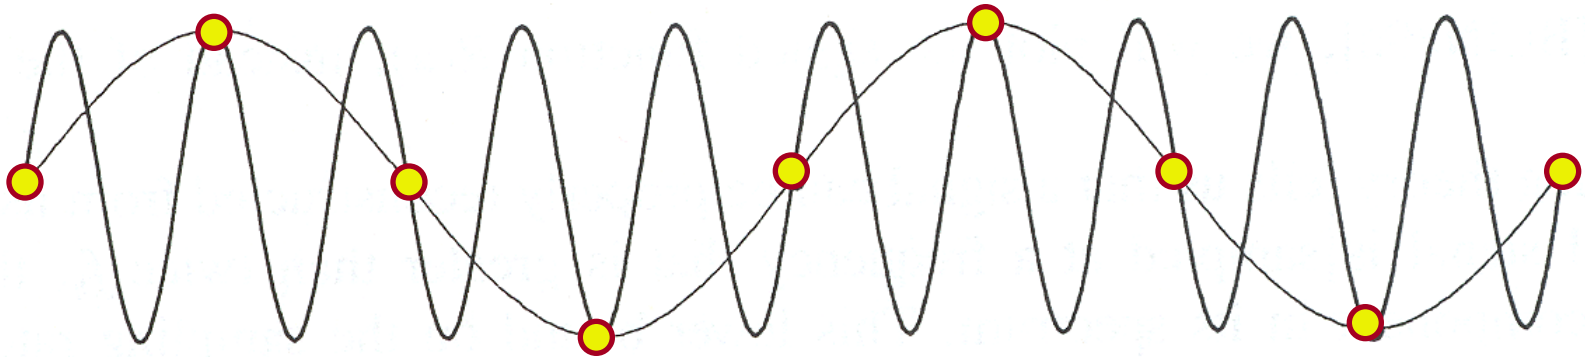

Specifically, in graphics:



- Spatial aliasing
- Temporal aliasing

Figure 14.17 FvDFH

Spatial Aliasing



Artifacts due to limited spatial resolution

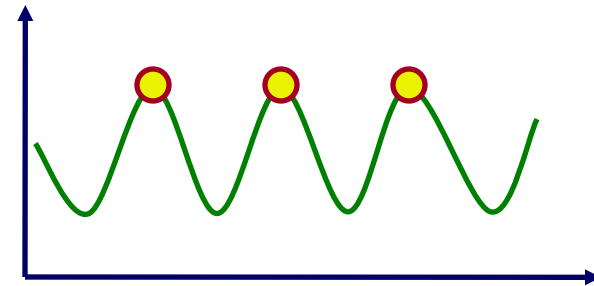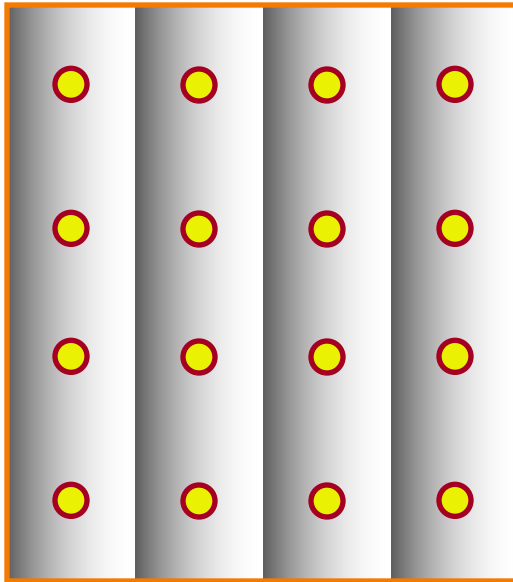

Spatial Aliasing



Artifacts due to limited spatial resolution



(Barely) adequate sampling




Inadequate sampling

Spatial Aliasing




Artifacts due to limited spatial resolution

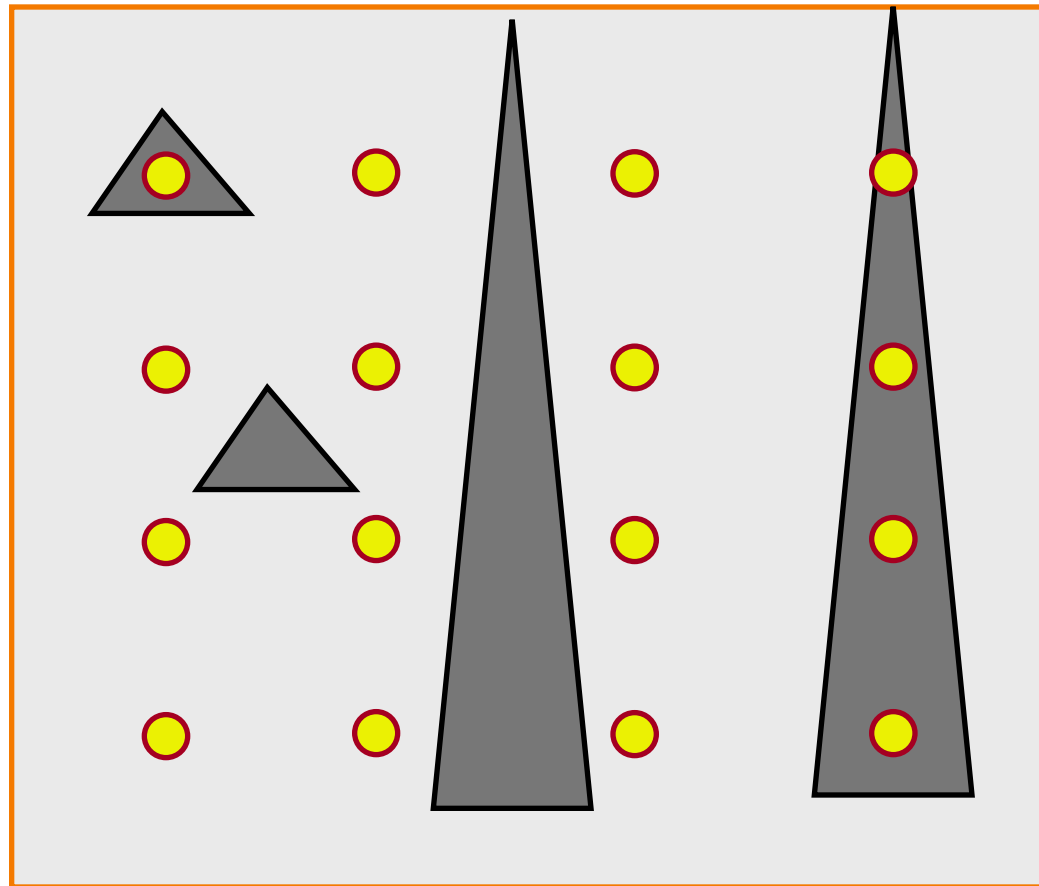

Spatial Aliasing



Artifacts due to limited spatial resolution

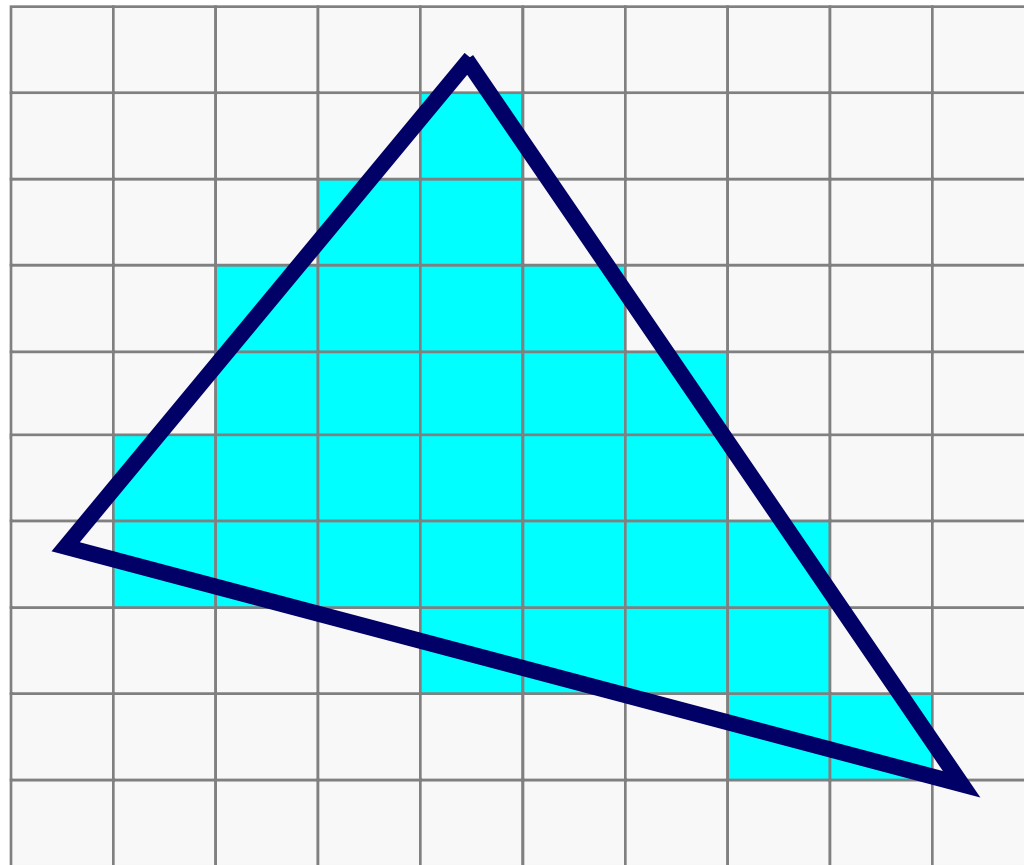


“Jaggies”

Temporal Aliasing



Artifacts due to limited temporal resolution

- Strobiling
- Flickering

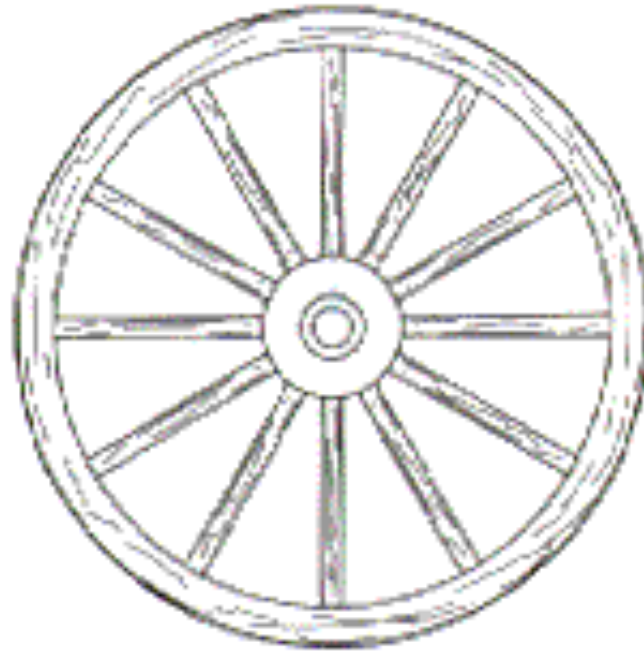


Temporal Aliasing



Artifacts due to limited temporal resolution

- Strobining
- Flickering

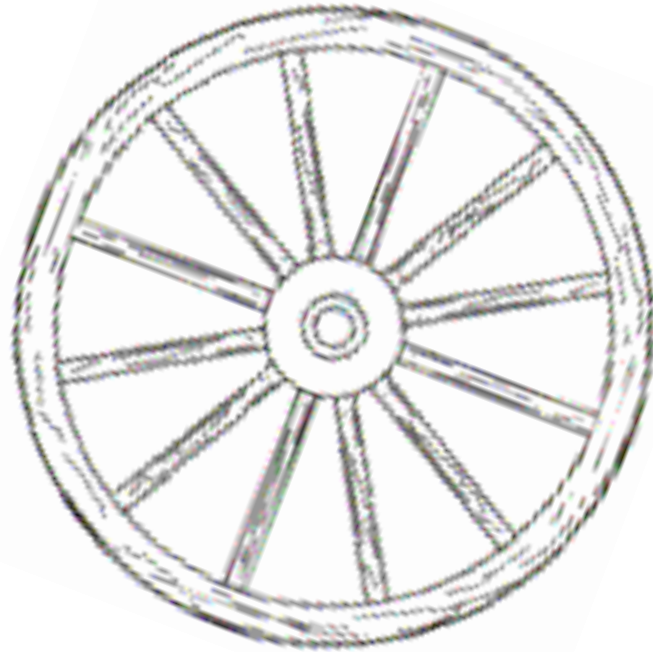


Temporal Aliasing



Artifacts due to limited temporal resolution

- Strobiling
- Flickering

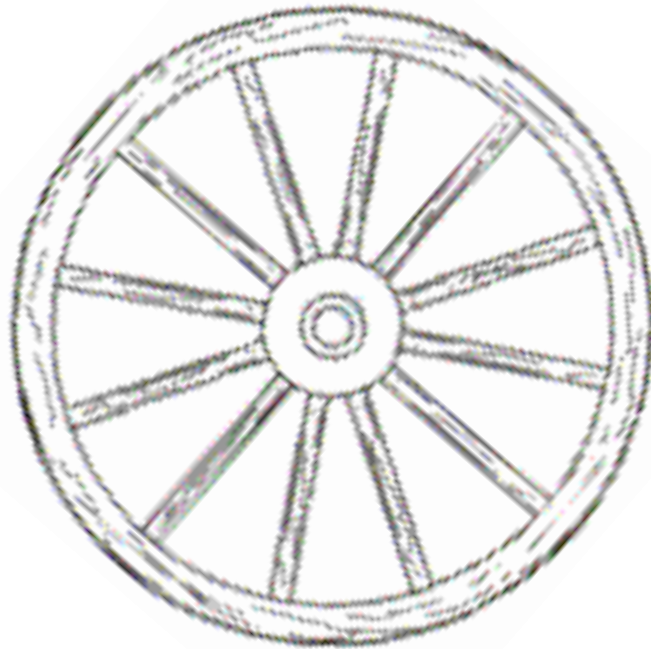


Temporal Aliasing



Artifacts due to limited temporal resolution

- Strobiling
- Flickering

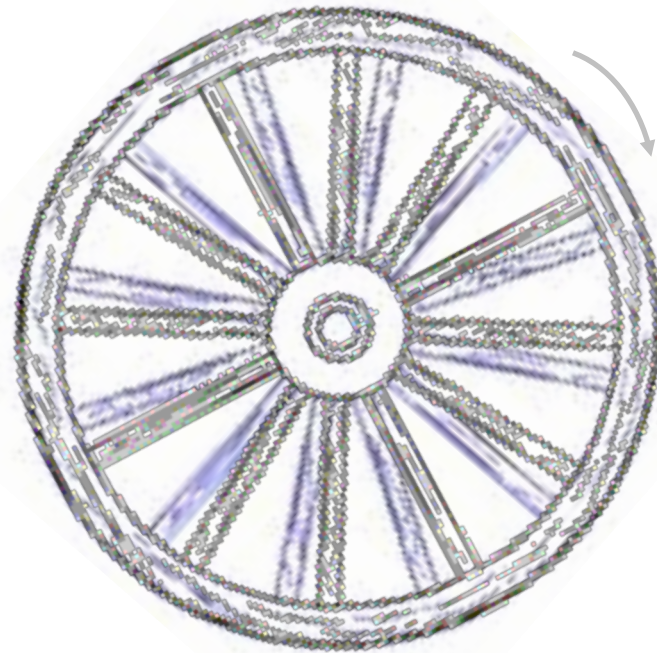


Sampling Theory



How many samples are enough to avoid aliasing?

- How many samples are required to represent a given signal without loss of information?
- What signals can be reconstructed without loss for a given sampling rate?

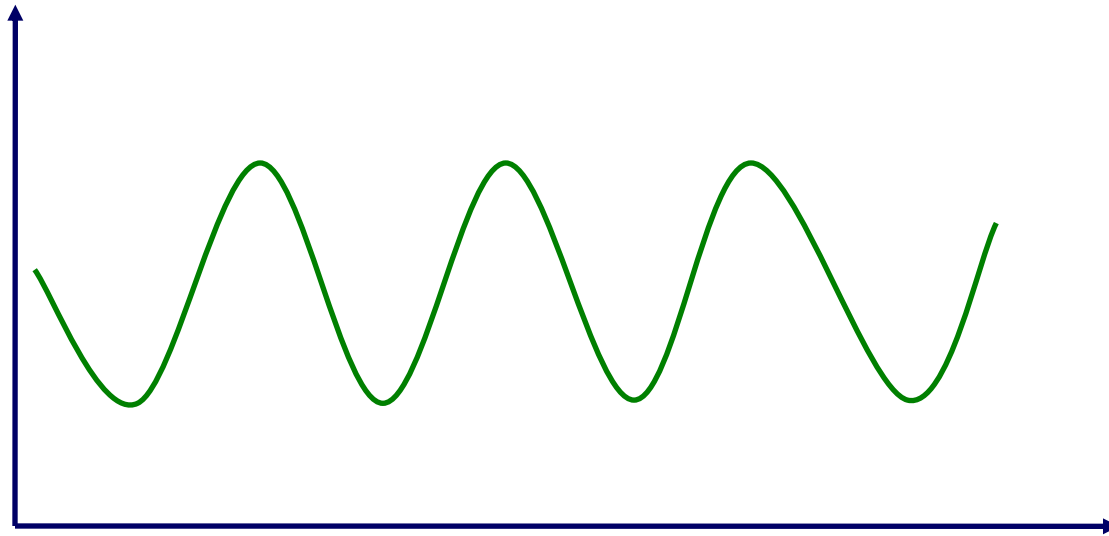


Sampling Theory



How many samples are enough to avoid aliasing?

- How many samples are required to represent a given signal without loss of information?
- What signals can be reconstructed without loss for a given sampling rate?

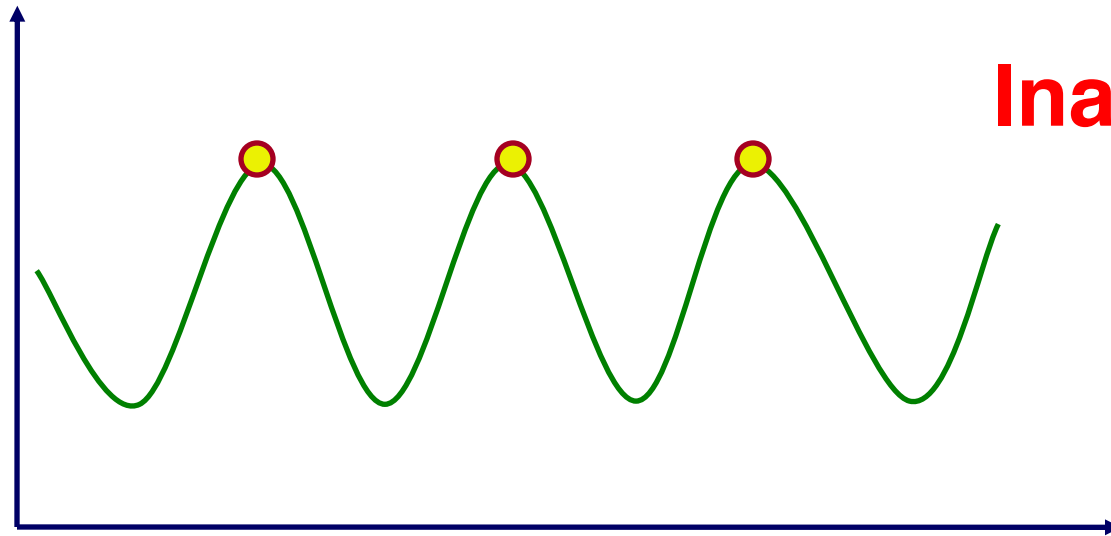


Inadequate

Sampling Theory



How many samples are enough to avoid aliasing?

- How many samples are required to represent a given signal without loss of information?
- What signals can be reconstructed without loss for a given sampling rate?

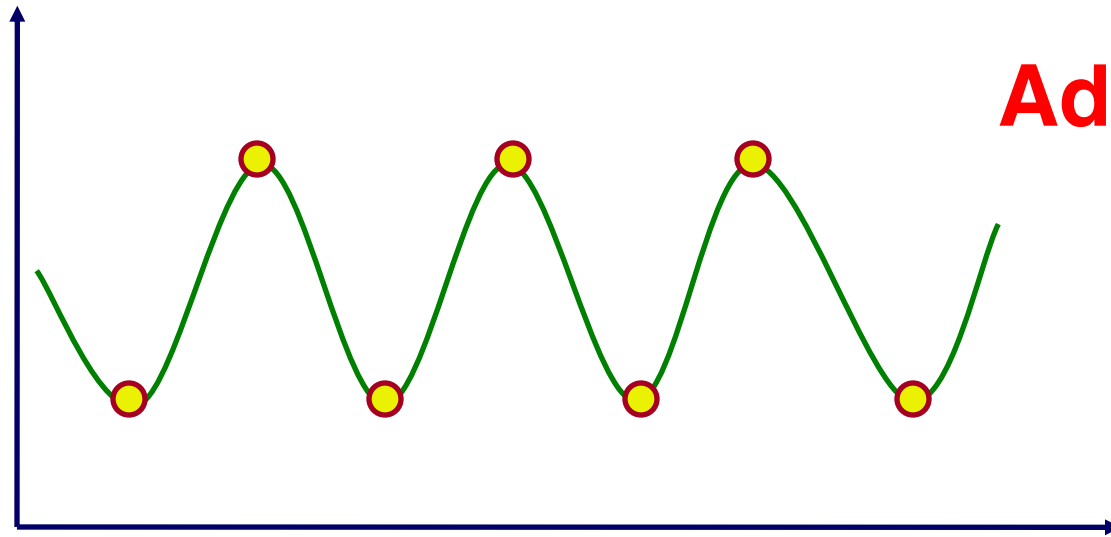


Adequate?

Sampling Theory



How many samples are enough to avoid aliasing?

- How many samples are required to represent a given signal without loss of information?
- What signals can be reconstructed without loss for a given sampling rate?

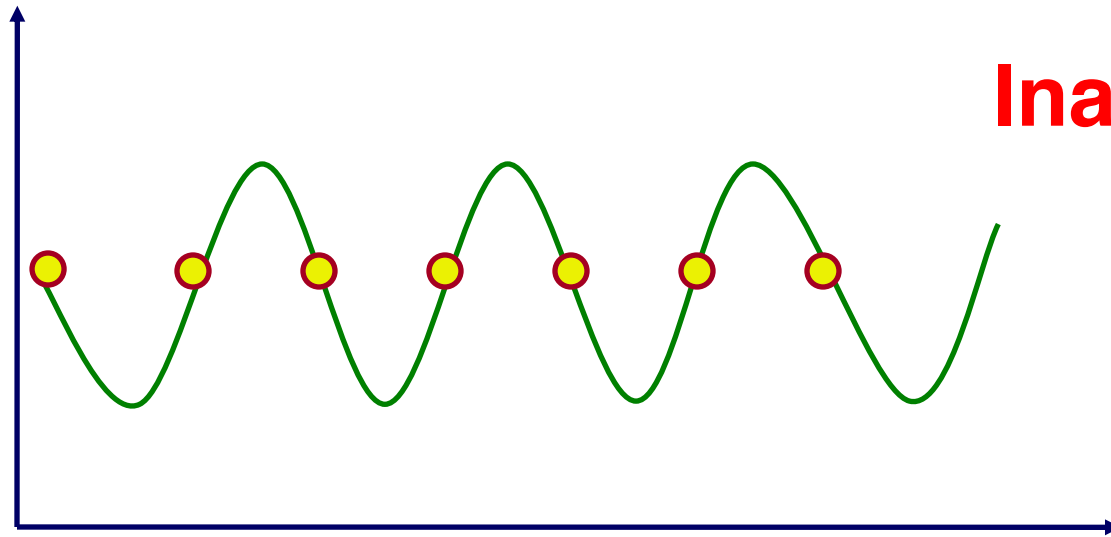


Inadequate

Sampling Theory



How many samples are enough to avoid aliasing?

- How many samples are required to represent a given signal without loss of information?
- What signals can be reconstructed without loss for a given sampling rate?

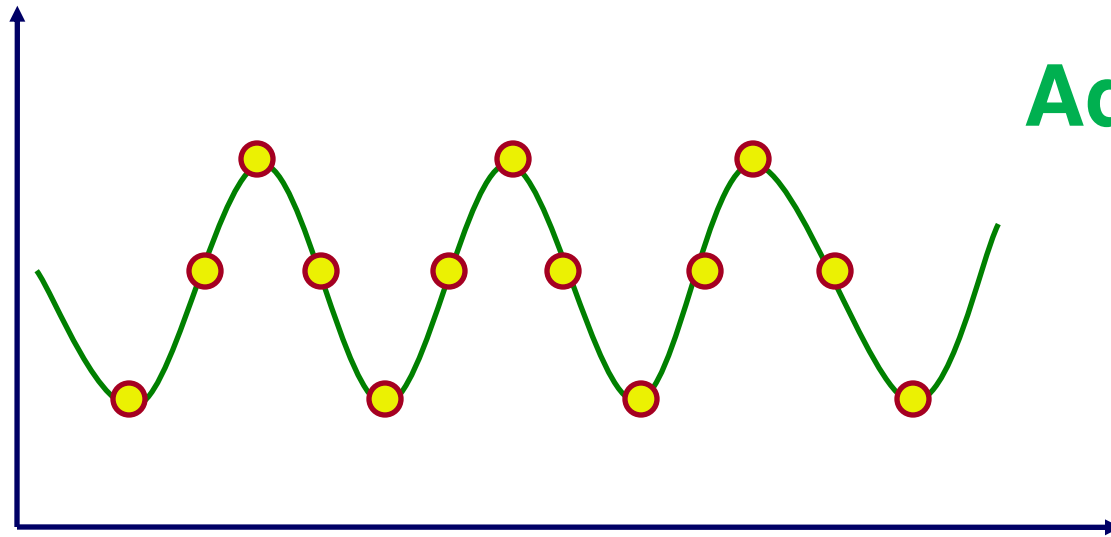


Adequate

Sampling Theory



How many samples are enough to avoid aliasing?

- How many samples are required to represent a given signal without loss of information?
- What signals can be reconstructed without loss for a given sampling rate?

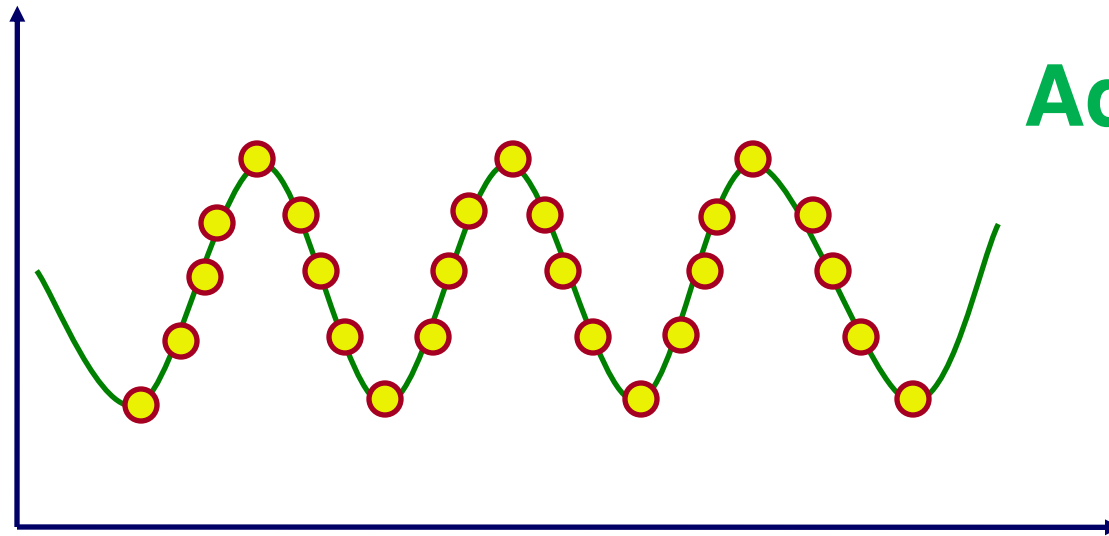


Adequate


Spectral Analysis



- Spatial domain:
 - Function: $f(x)$
 - Filtering: convolution

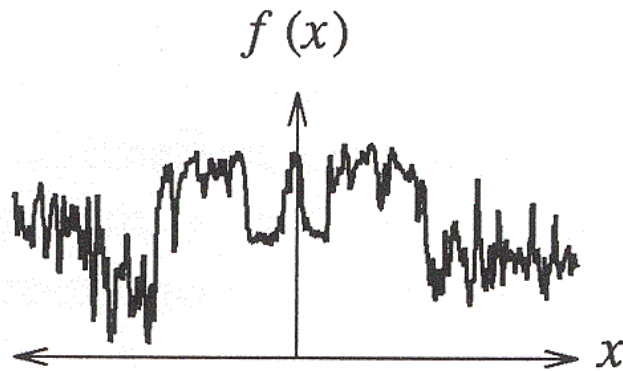

- Frequency domain:
 - Function: $F(u)$
 - Filtering: multiplication

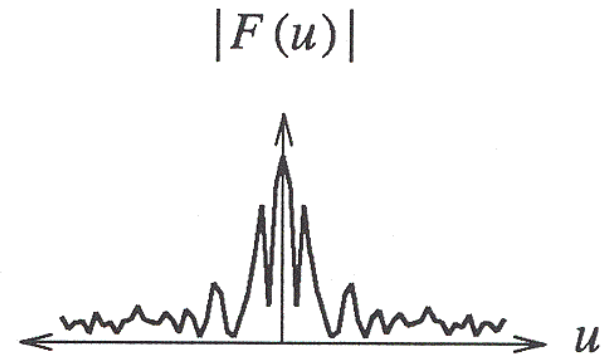

Any signal can be written as a sum of periodic functions.

Fourier Transform


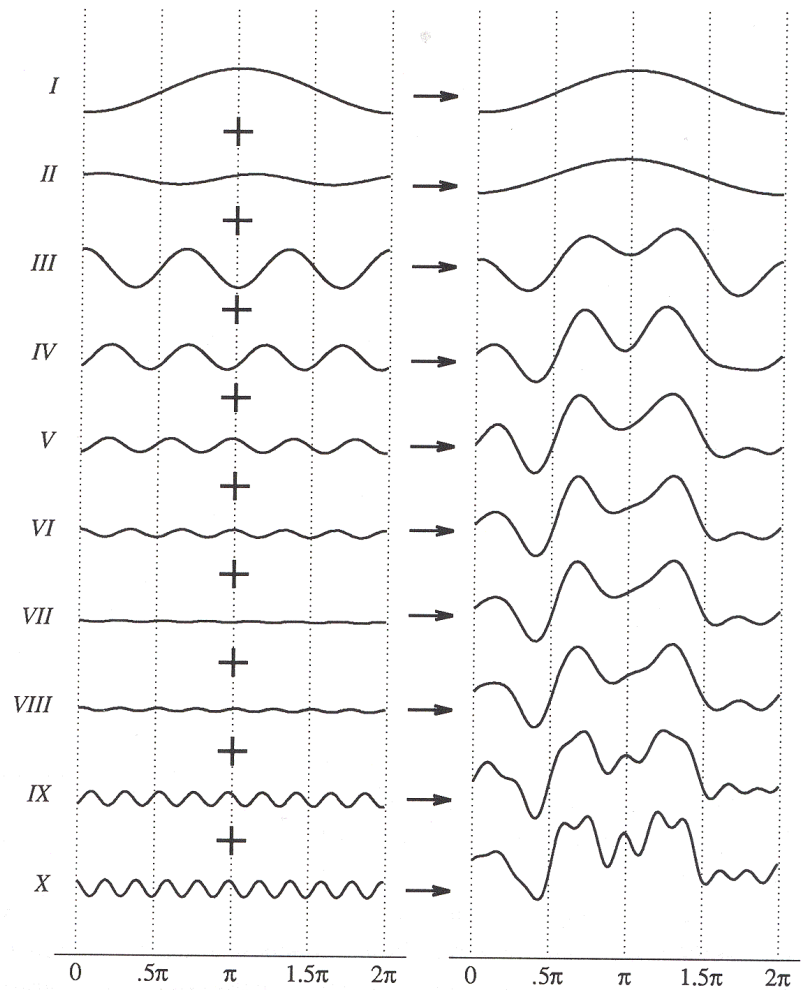


Figure 2.6 Wolberg

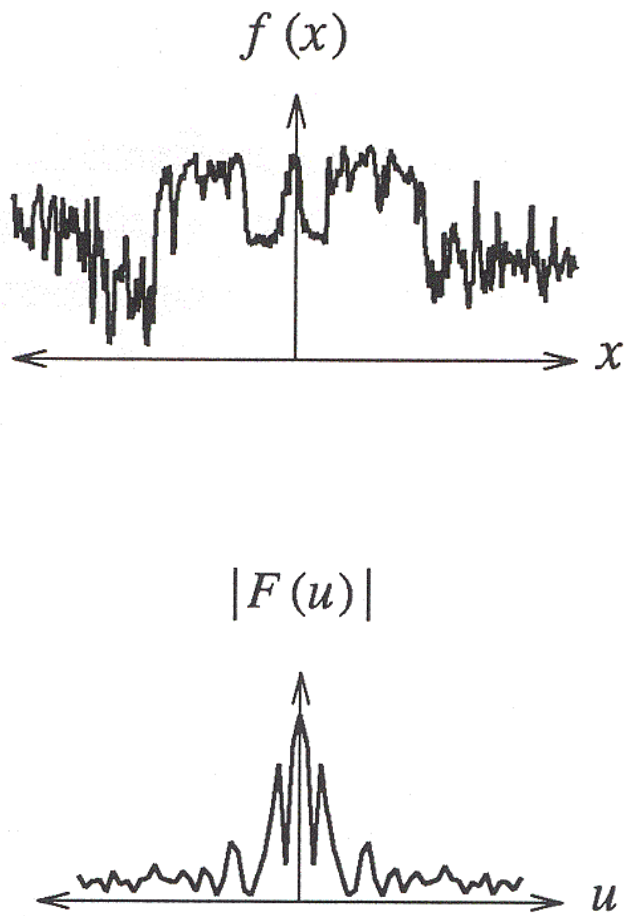

Fourier Transform

- Fourier transform:

$$F(u) = \int_{-\infty}^{\infty} f(x) e^{-i2\pi xu} dx$$

- Inverse Fourier transform:

$$f(x) = \int_{-\infty}^{\infty} F(u) e^{+i2\pi ux} du$$

Sampling Theorem



- A signal can be reconstructed from its samples iff it has no content $\geq \frac{1}{2}$ the sampling frequency
– Shannon
- The minimum sampling rate for a bandlimited function is called the “Nyquist rate”

A signal is *bandlimited* if its highest frequency is bounded. That frequency is called the bandwidth.

Antialiasing



- Option: Sample at higher rate
 - Not always possible
 - Doesn't always solve the problem
- Option: **Pre-filter** to form bandlimited signal
 - Use low-pass filter to limit signal to $< 1/2$ sampling rate
 - Trades blurring for aliasing


Image Processing



Consider scaling the image
(or, equivalently, reducing resolution)



Original image

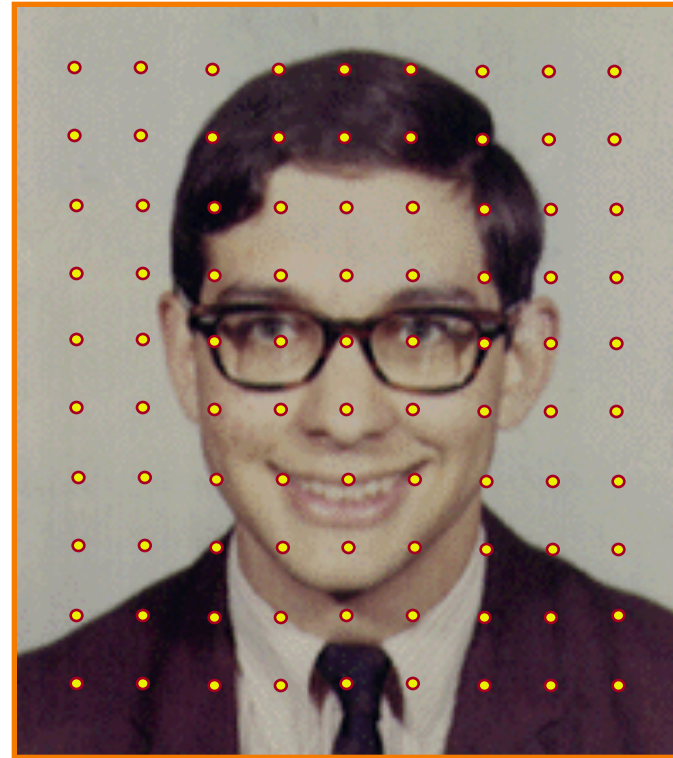

1/4 resolution

Image Processing



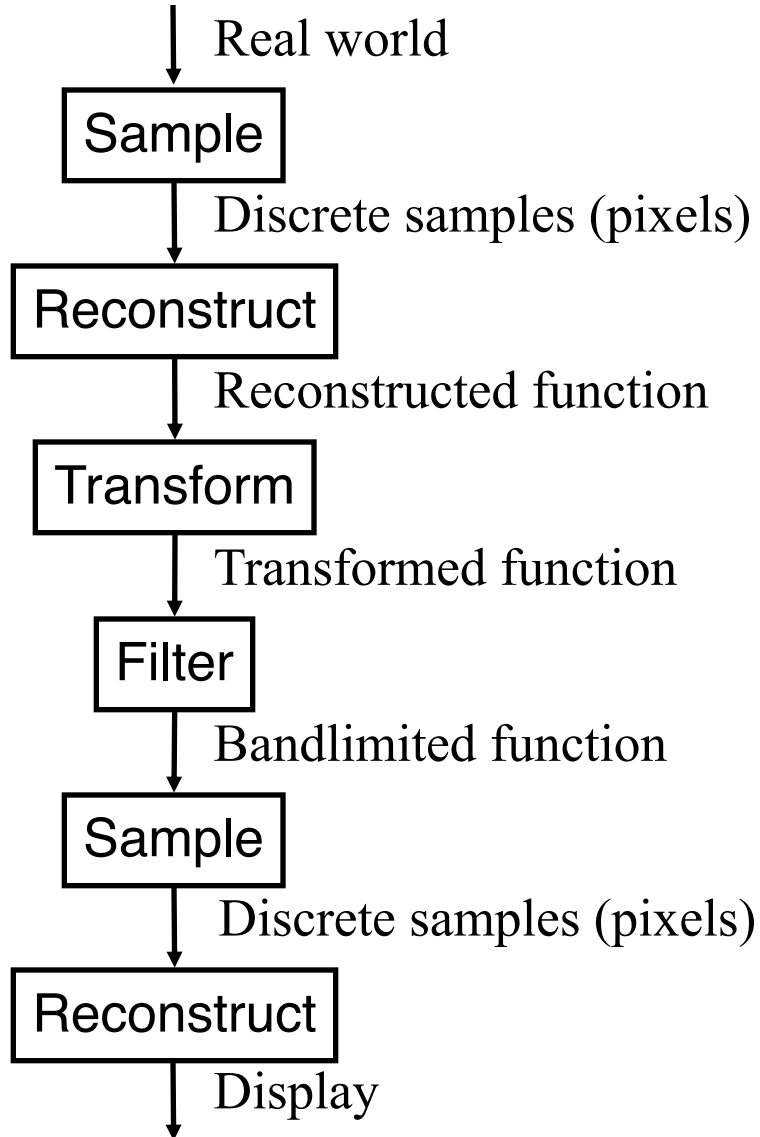


Image Processing

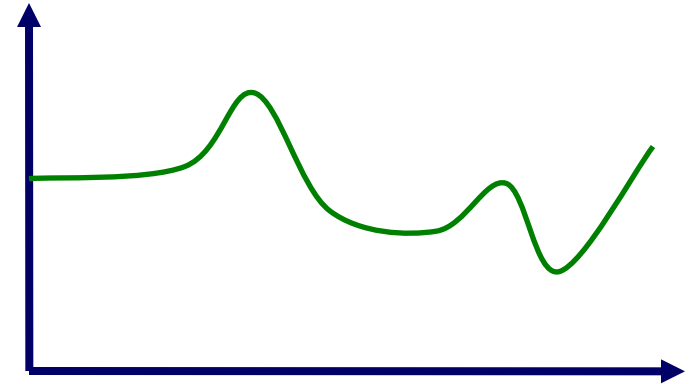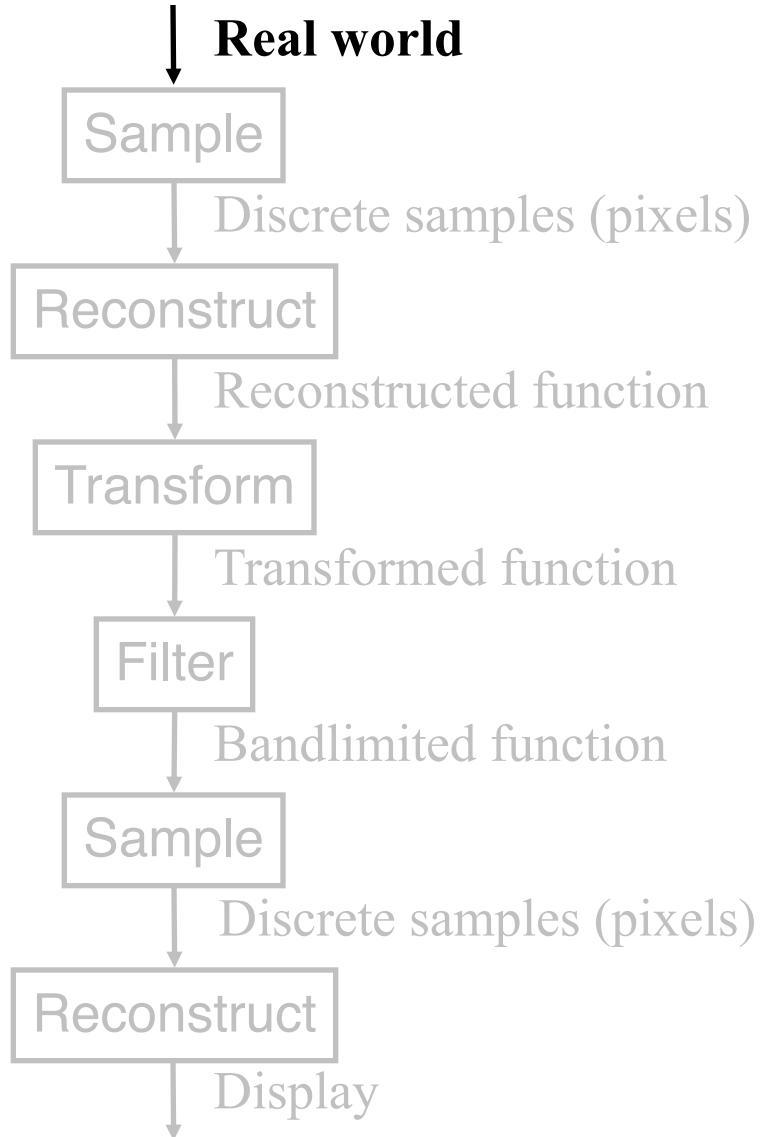

Continuous Function

Image Processing






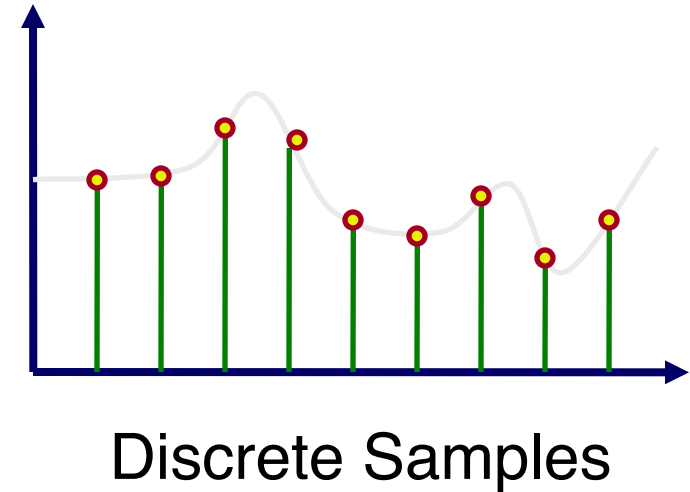


Image Processing

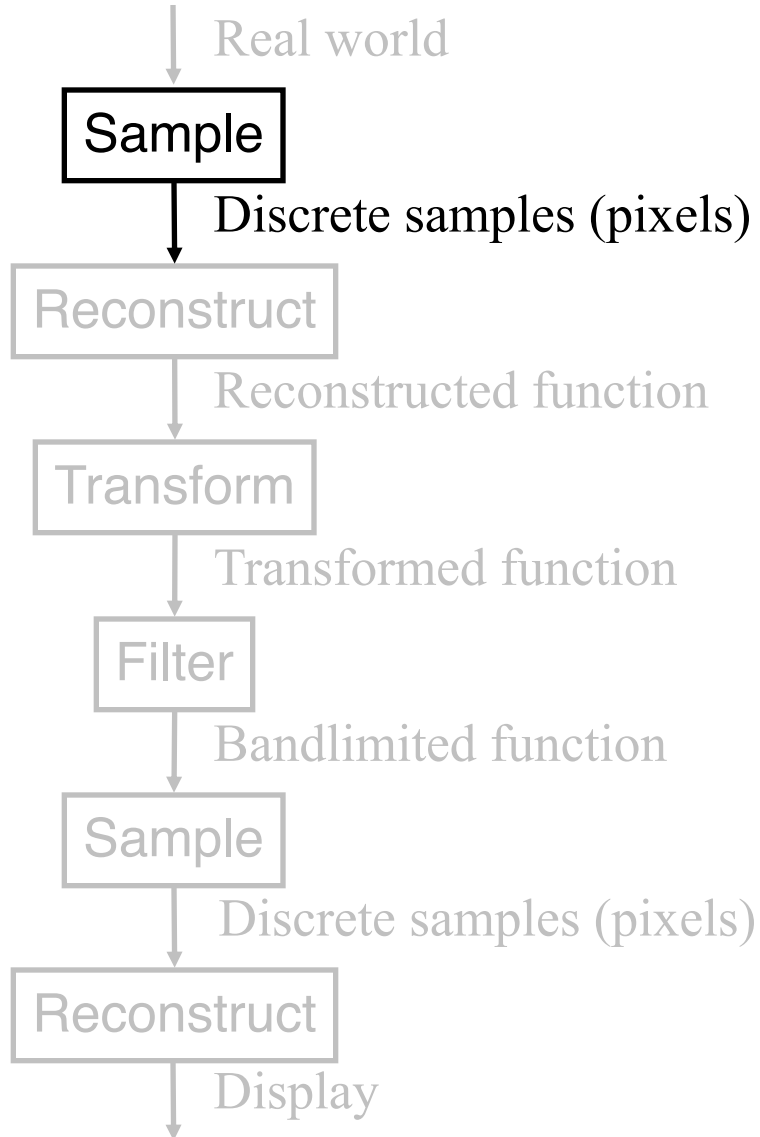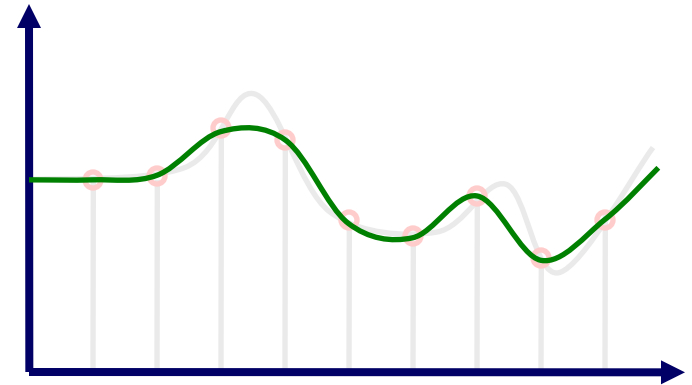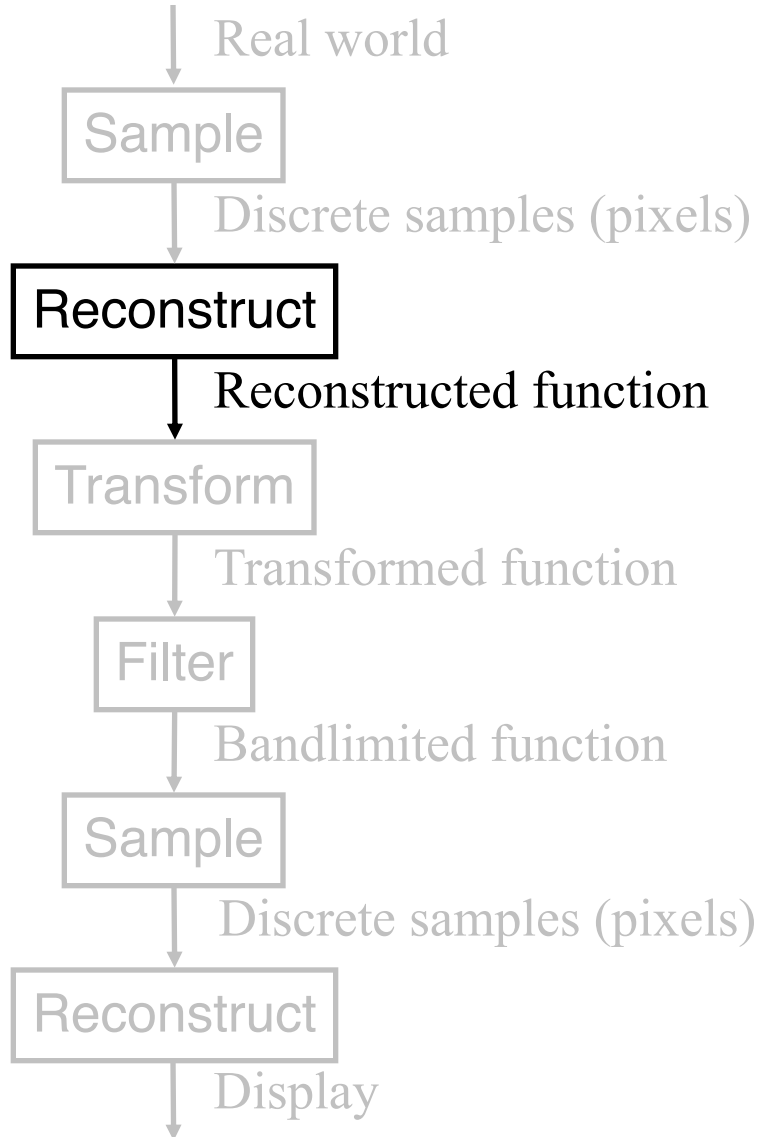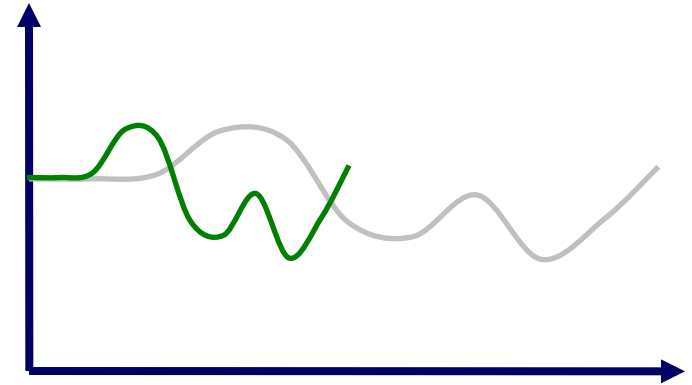



Reconstructed Function

Image Processing

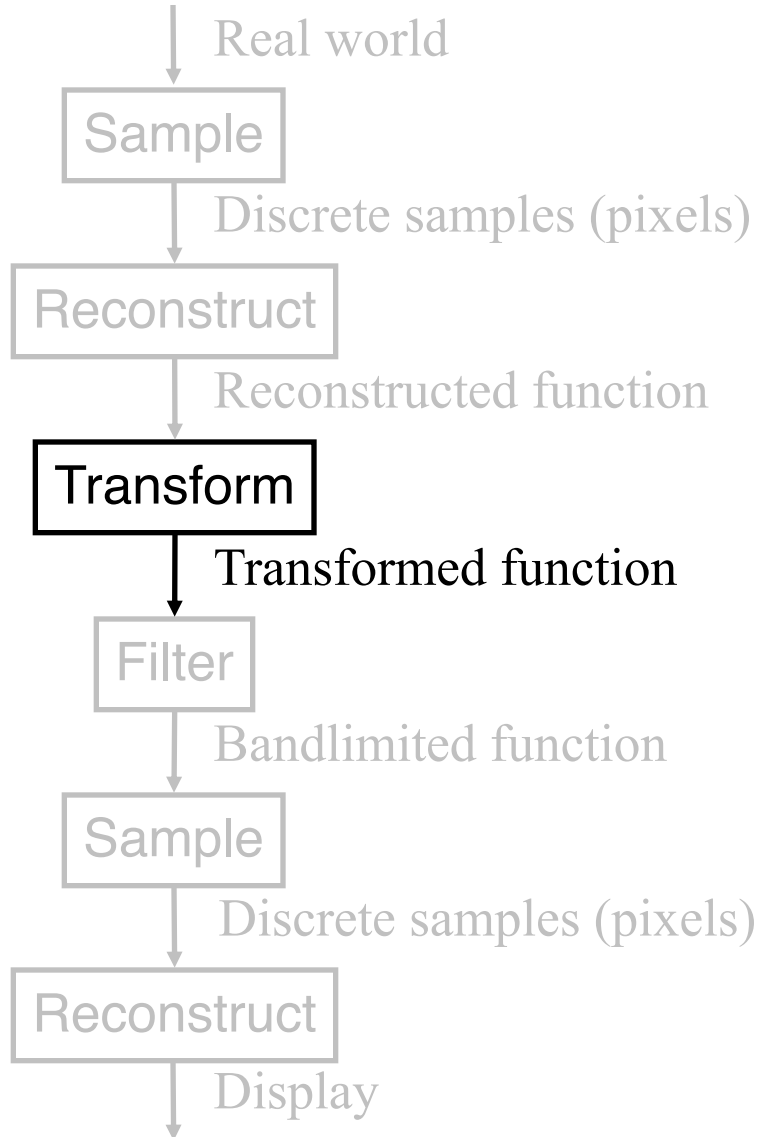

Transformed Function

Image Processing

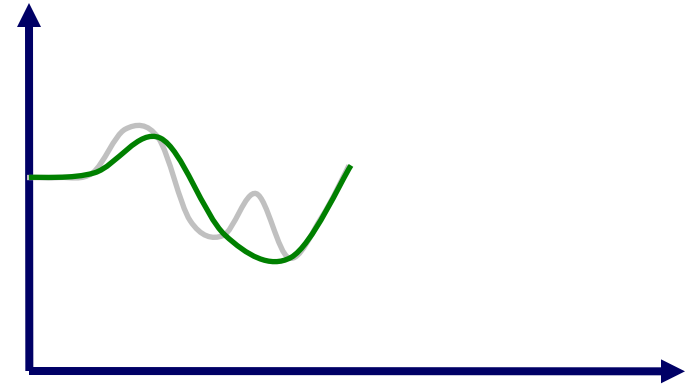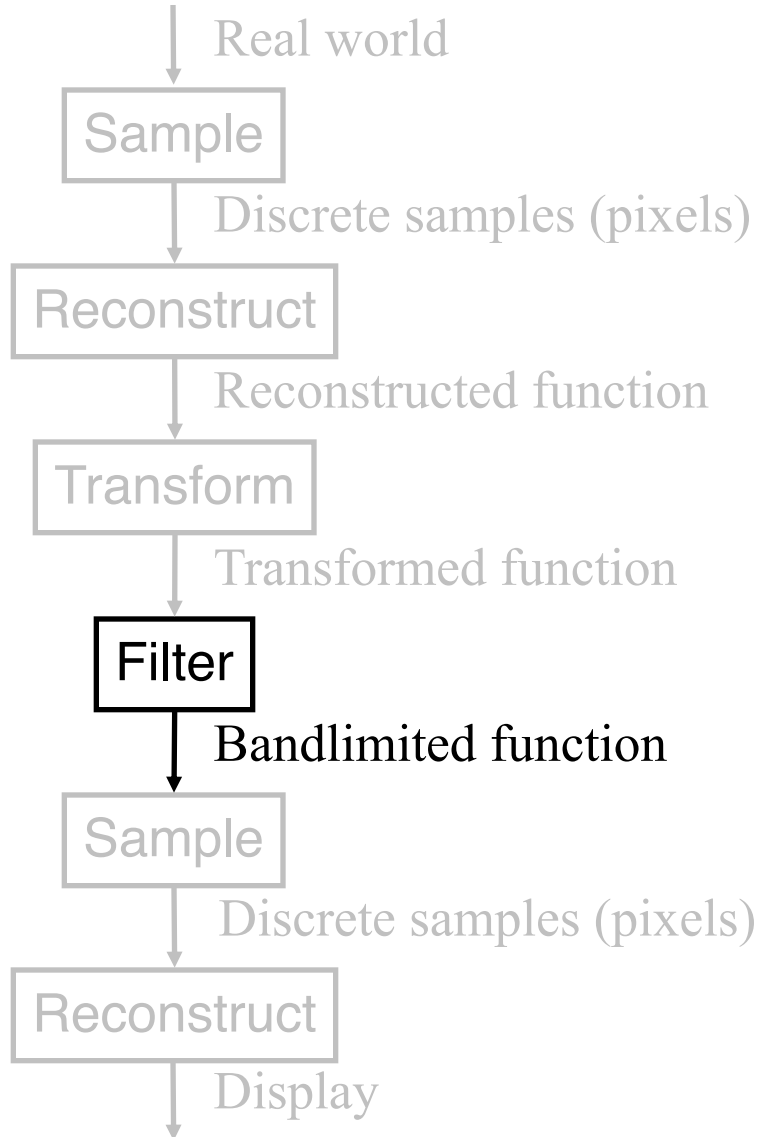

Bandlimited Function

Image Processing

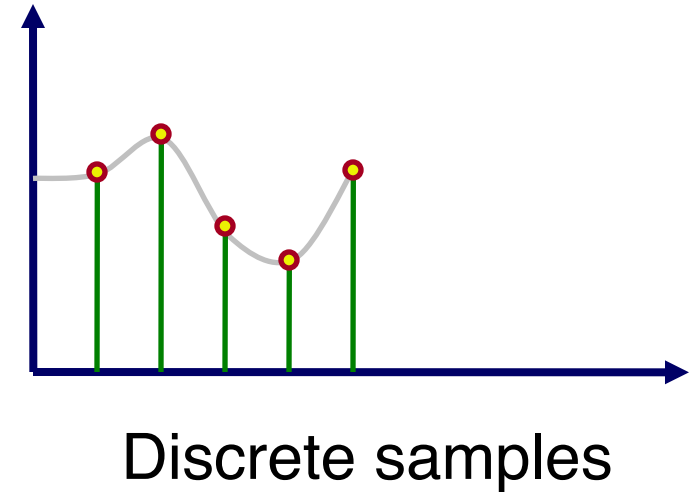
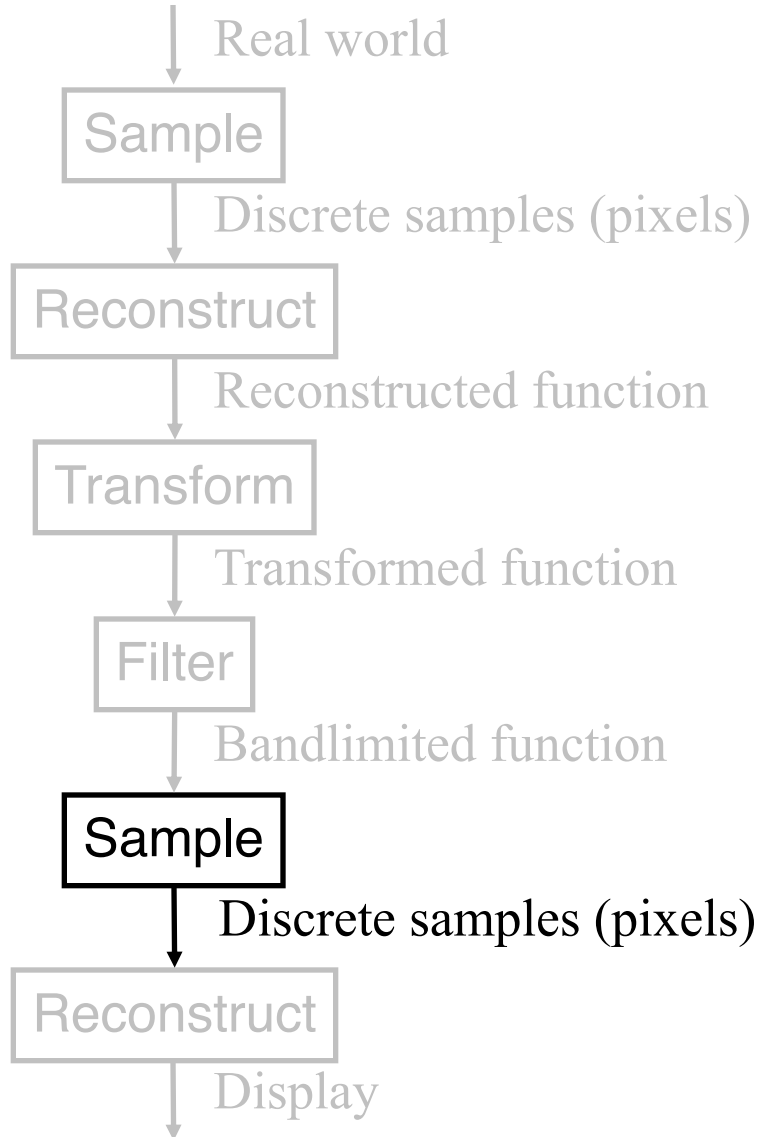


Image Processing



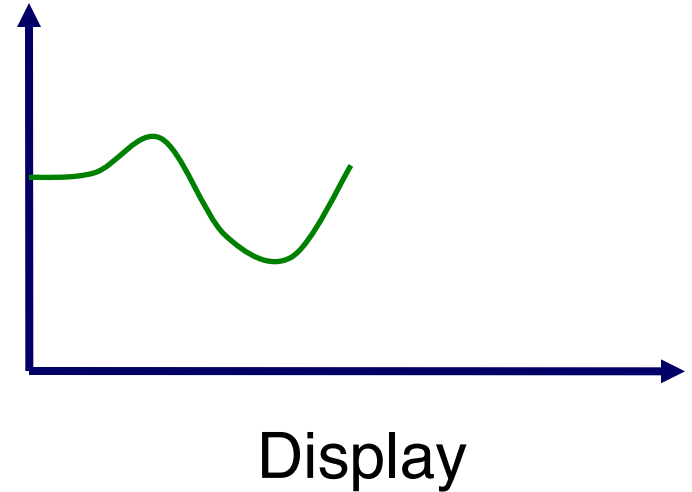


Image Processing

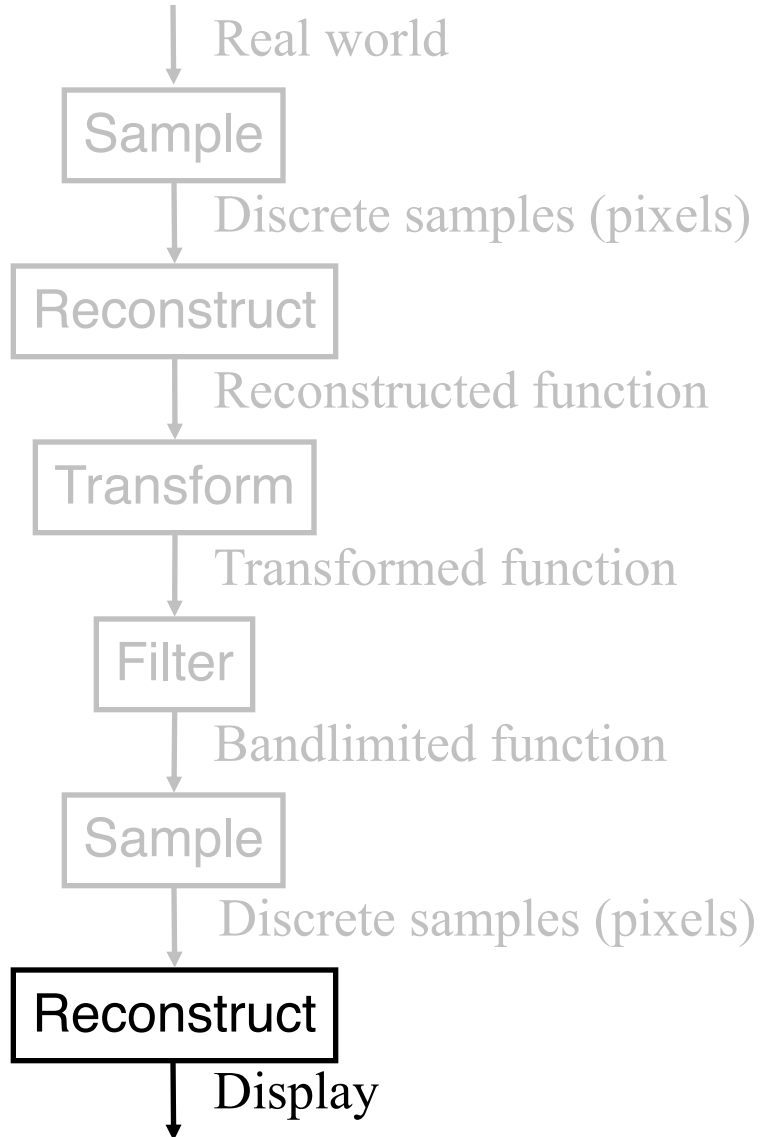


- **Reconstruction** filter especially important when **magnifying**
- **Bandlimiting** filter especially important when **minifying**


Ideal Image Processing Filter

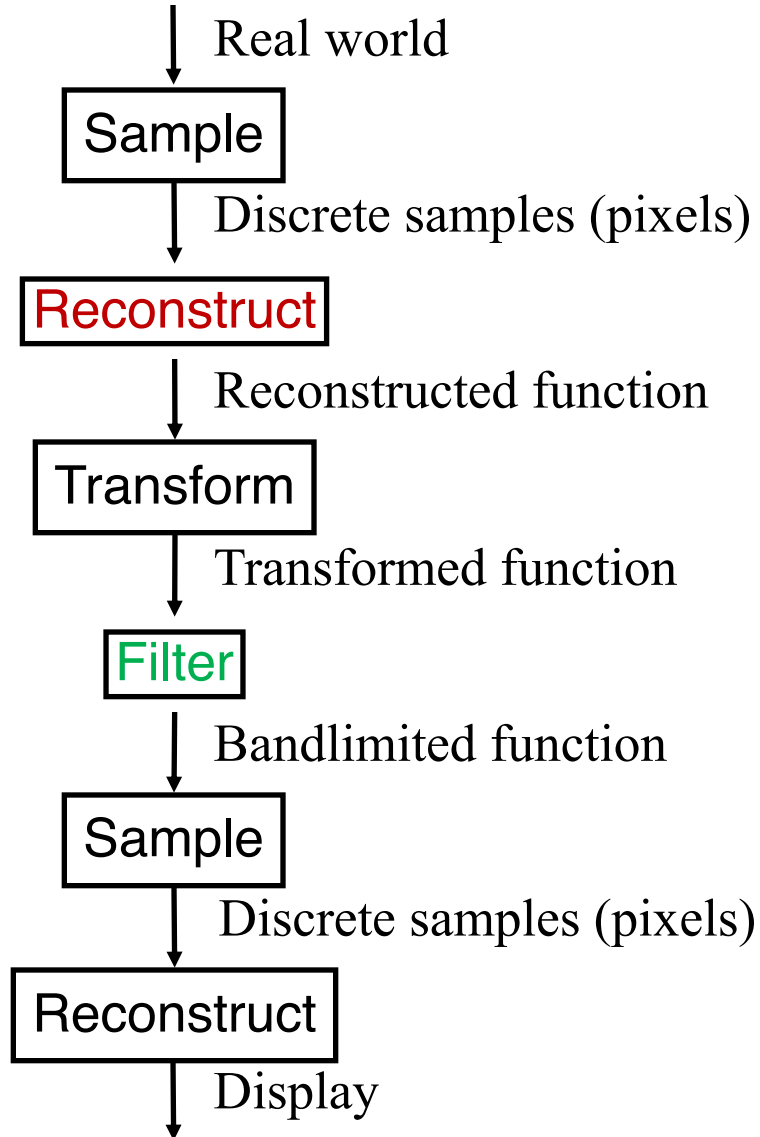

- Frequency domain

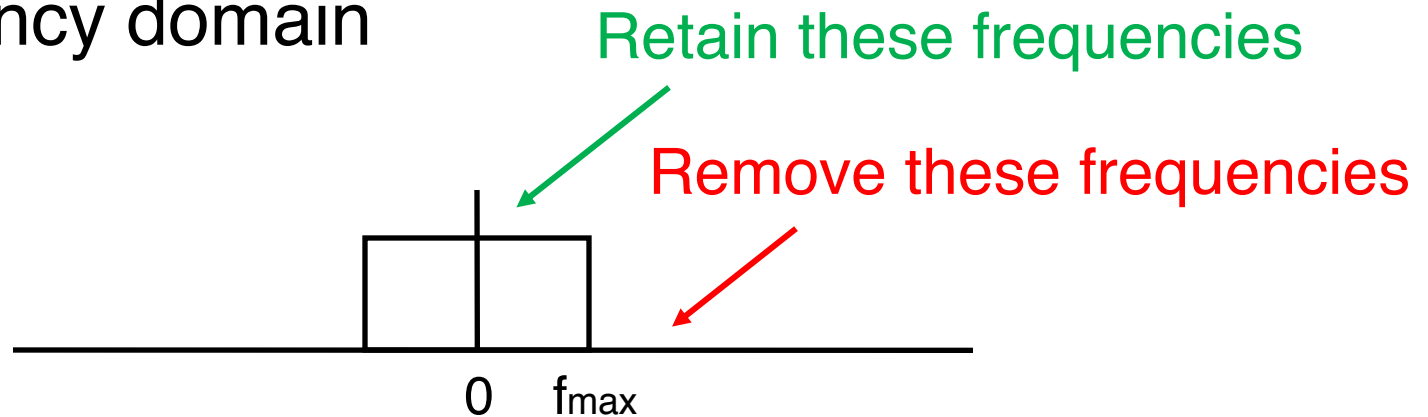

- Spatial domain

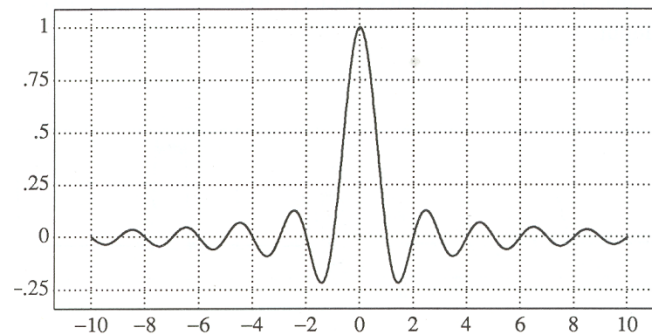


$$\text{Sinc}(x) = \frac{\sin \pi x}{\pi x}$$

Figure 4.5 Wolberg

Practical Image Processing



Resampling

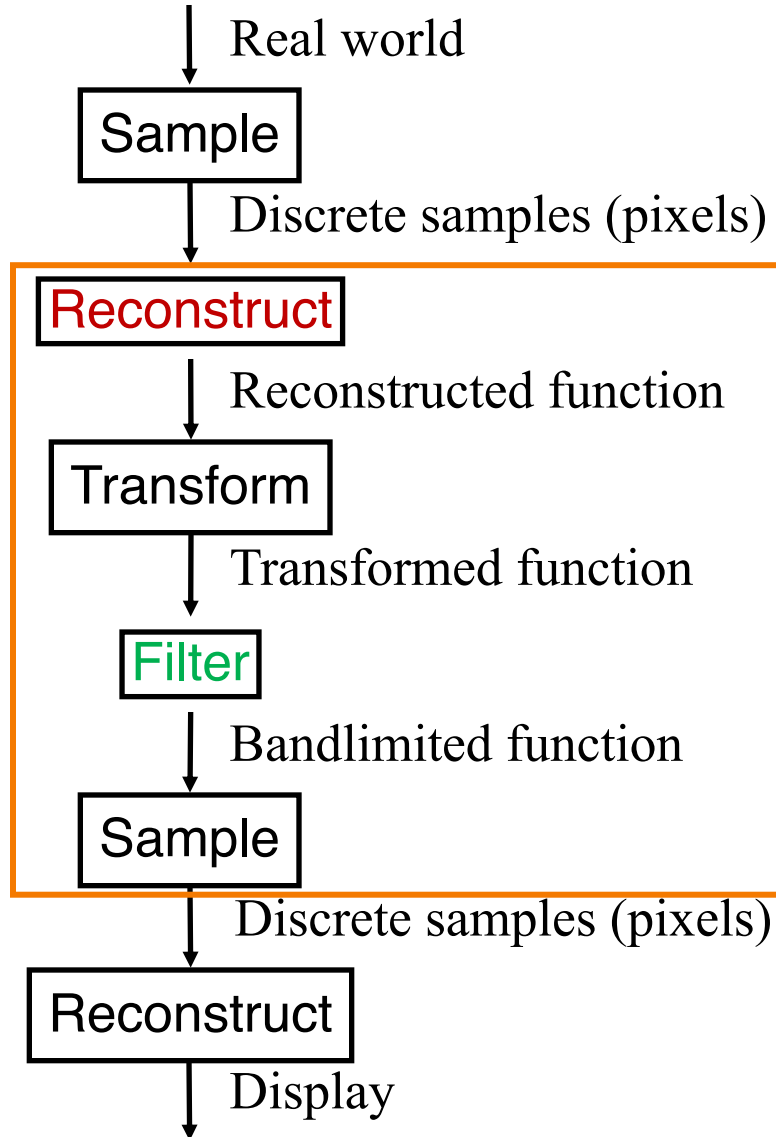


- **Resampling:** effectively (discrete) convolution to prevent artifacts
- Finite low-pass filters
 - Point sampling (bad)
 - Box filter
 - Triangle filter
 - Gaussian filter

Point Sampling

- Possible (poor) resampling implementation:



```
float Resample(src, u, v, k, w) {  
    int iu = round(u);  
    int iv = round(v);  
    return src(iu, iv);  
}
```

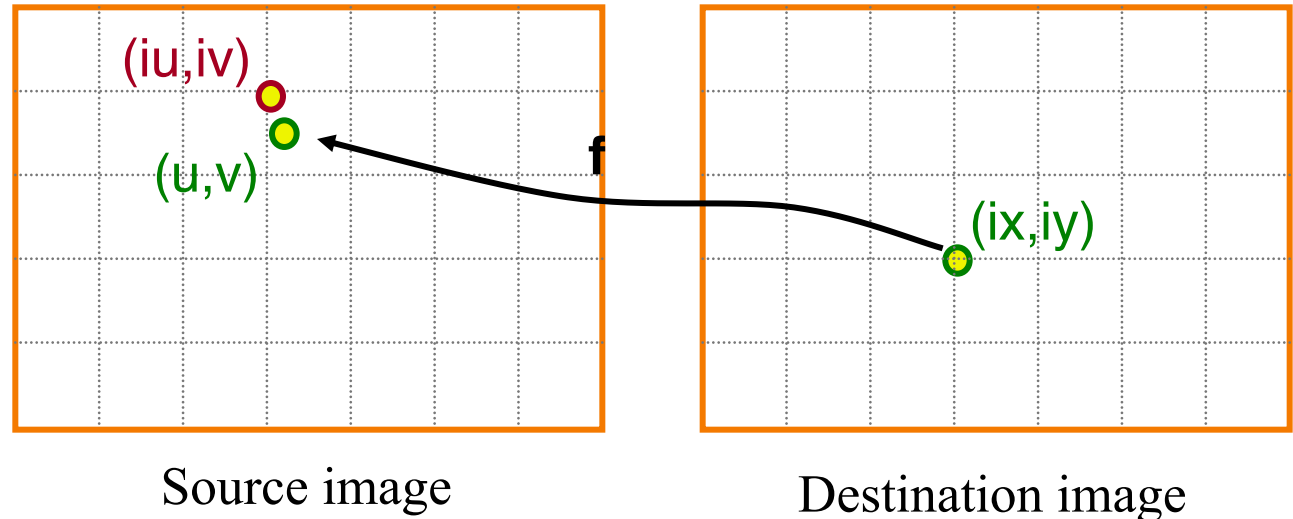



Point Sampling

- Use nearest sample

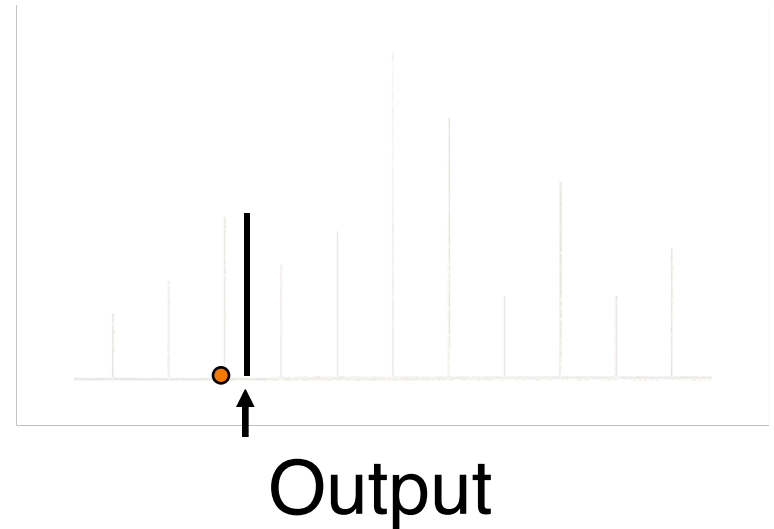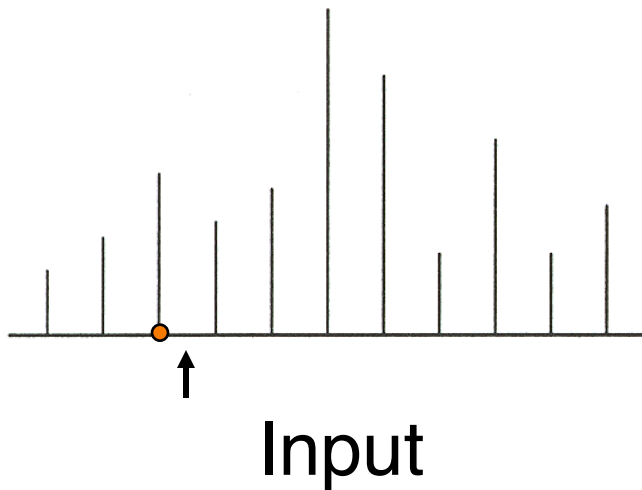

Point Sampling



Point Sampled: Aliasing!




Correctly Bandlimited

Resampling with Filter

- Output is weighted average of inputs:

```
float Resample(src, u, v, k, w)
{
    float dst = 0;
    float ksum = 0;
    int ulo = u - w; etc.
    for (int iu = ulo; iu < uhi; iu++) {
        for (int iv = vlo; iv < vhi; iv++) {
            dst += k(u,v,iu,iv,w) * src(iu,iv)
            ksum += k(u,v,iu,iv,w);
        }
    }
    return dst / ksum;
}
```

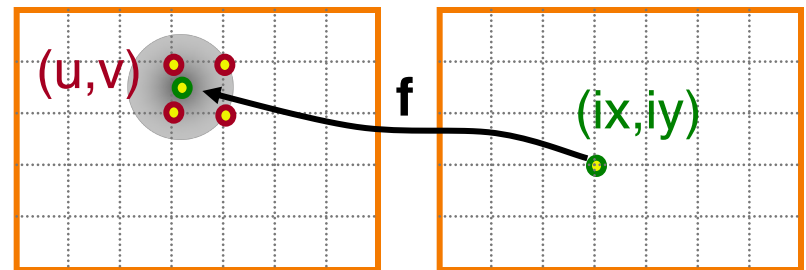


Source image

Destination image

Image Resampling




- Compute weighted sum of pixel neighborhood
 - Output is weighted average of input, where weights are normalized values of filter kernel (k)

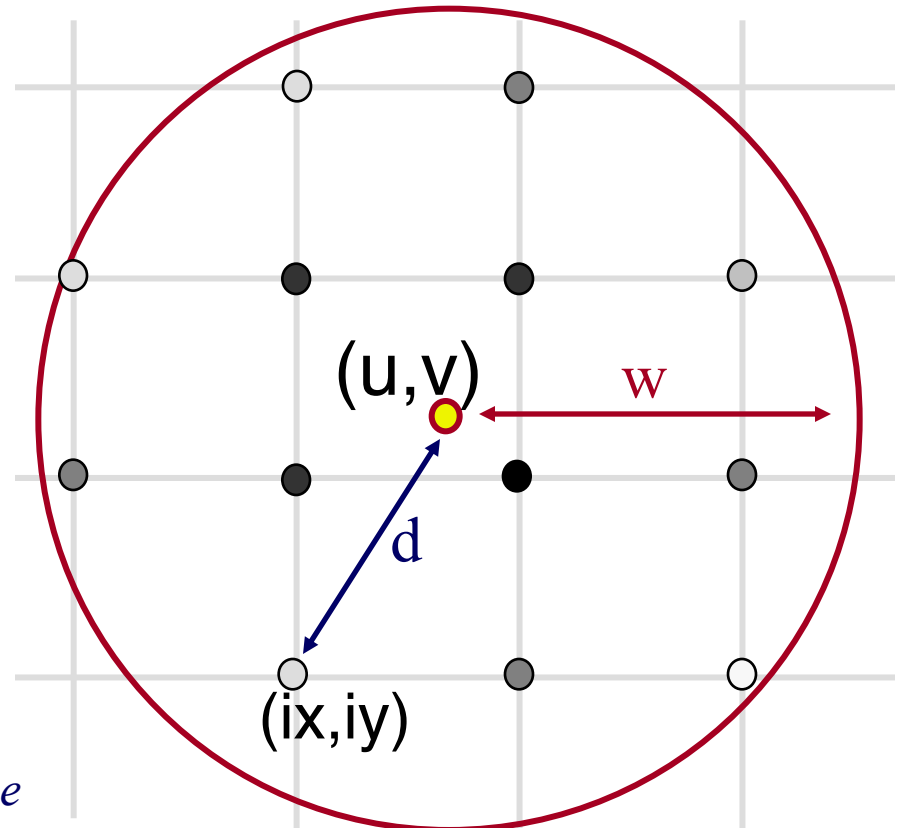


$k(ix, iy)$ represented by gray value

Image Resampling

- For isotropic Triangle and Gaussian filters, $k(ix, iy)$ is function of d and w

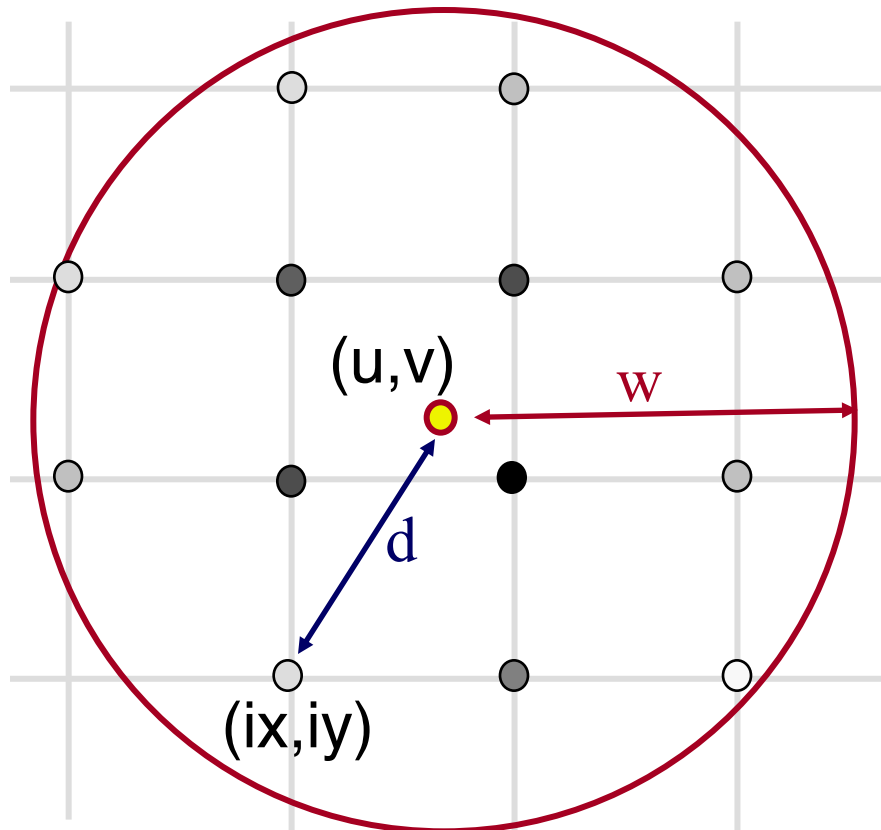

Filter Width = 2

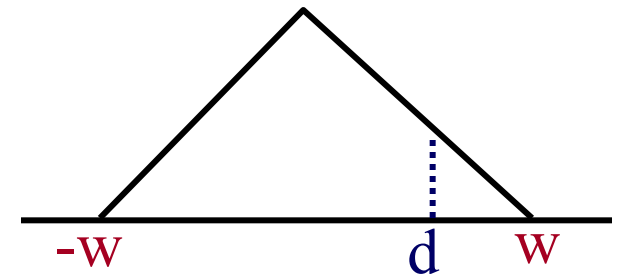


Triangle filter


$$k(i,j) = \max(1 - d/w, 0)$$

Image Resampling

- For isotropic Triangle and Gaussian filters, $k(ix, iy)$ is function of d and w
 - Filter width chosen based on scale factor (or blur)

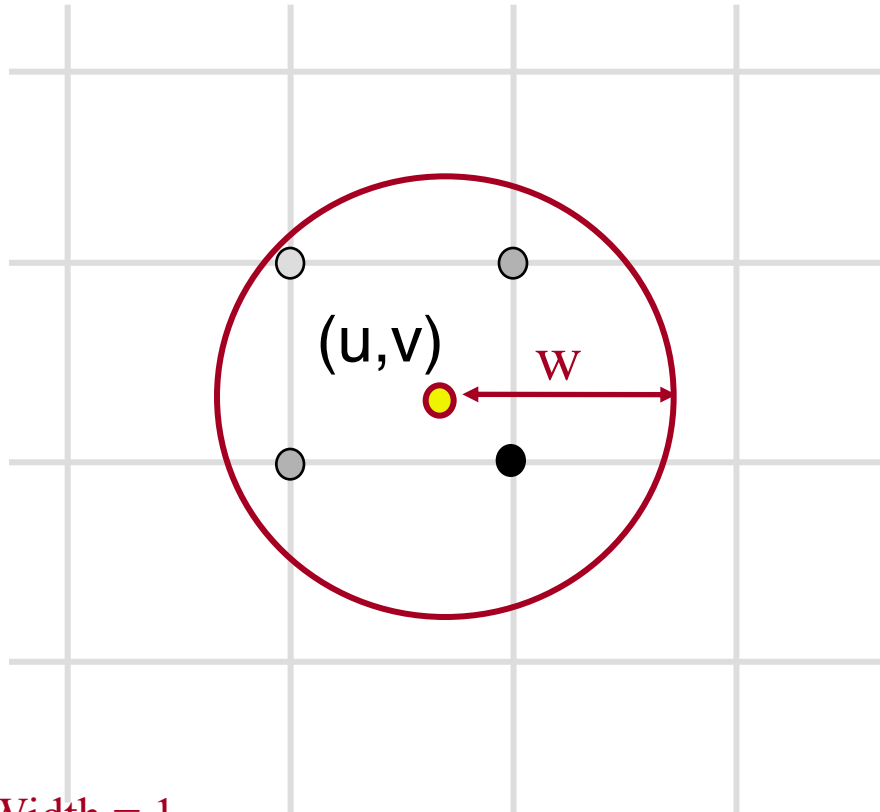


Filter Width = 1

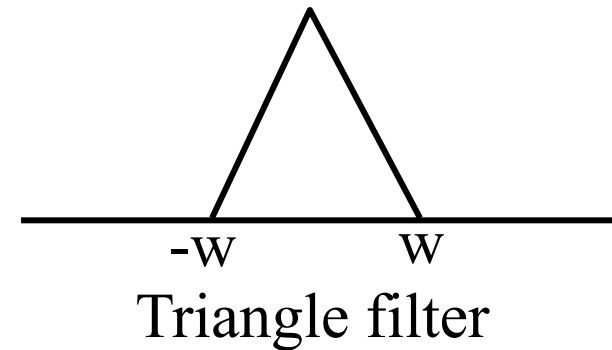


Width of filter
affects blurriness

Gaussian Filtering

- Kernel is Gaussian function

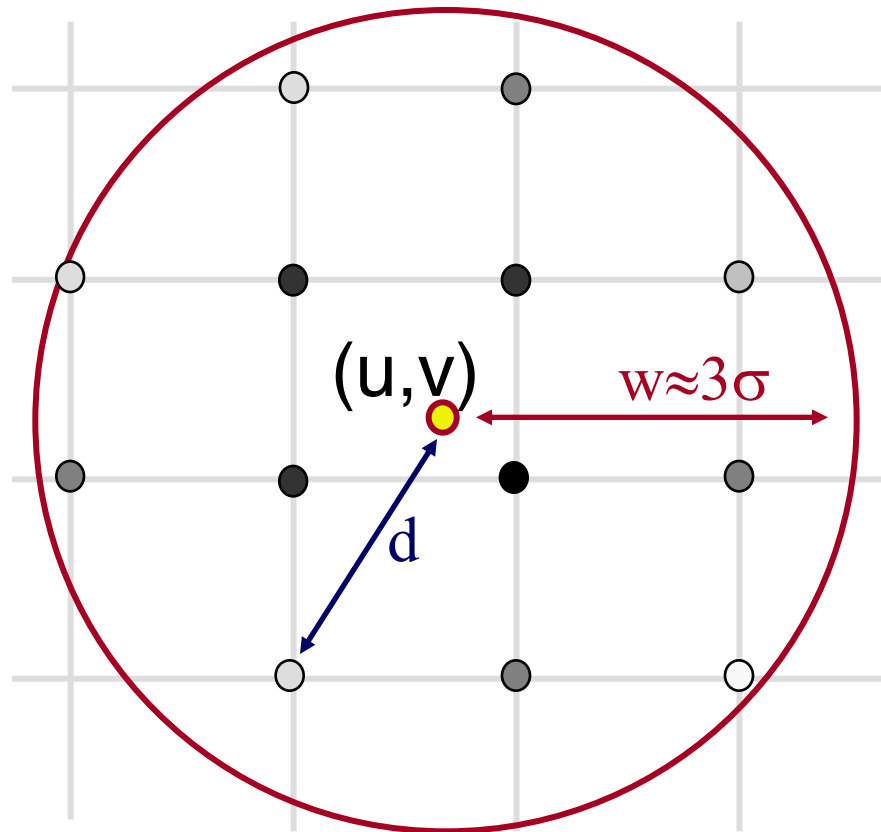

$$G(d, \sigma) = e^{-d^2 / (2\sigma^2)}$$


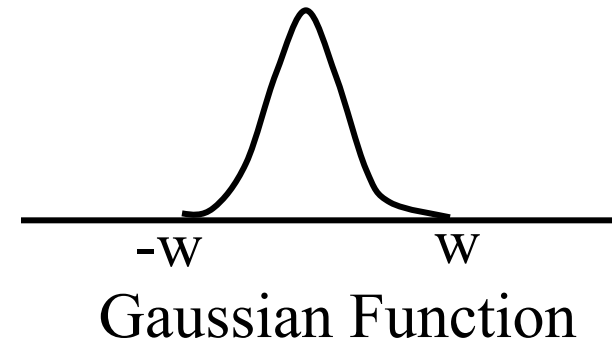


- Drops off quickly, but never gets to exactly 0
- In practice: compute out to $w \sim 2.5\sigma$ or 3σ

Image Resampling



- What if width (w) is smaller than sample spacing?

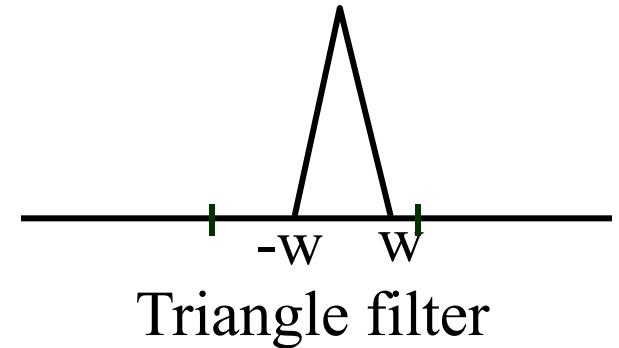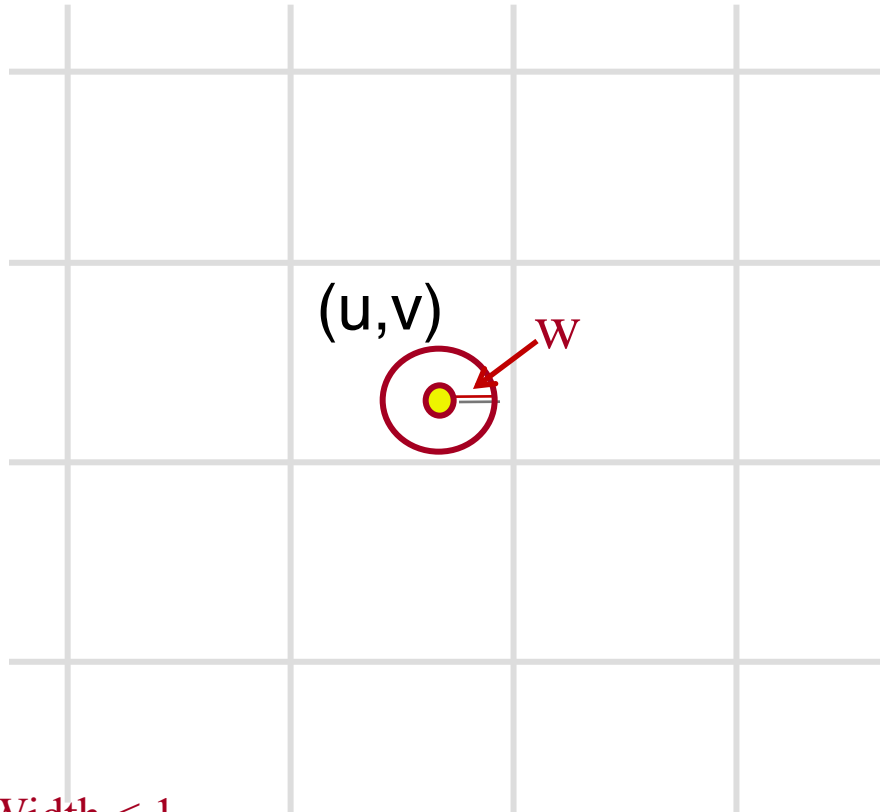


Filter Width < 1

Image Resampling (with width < 1)



- Reconstruction filter:
bilinear interpolation of four closest pixels
 - **a** = linear interpolation of $\text{src}(u_1, v_2)$ and $\text{src}(u_2, v_2)$
 - **b** = linear interpolation of $\text{src}(u_1, v_1)$ and $\text{src}(u_2, v_1)$
 - **dst**(x, y) = linear interpolation of “**a**” and “**b**”


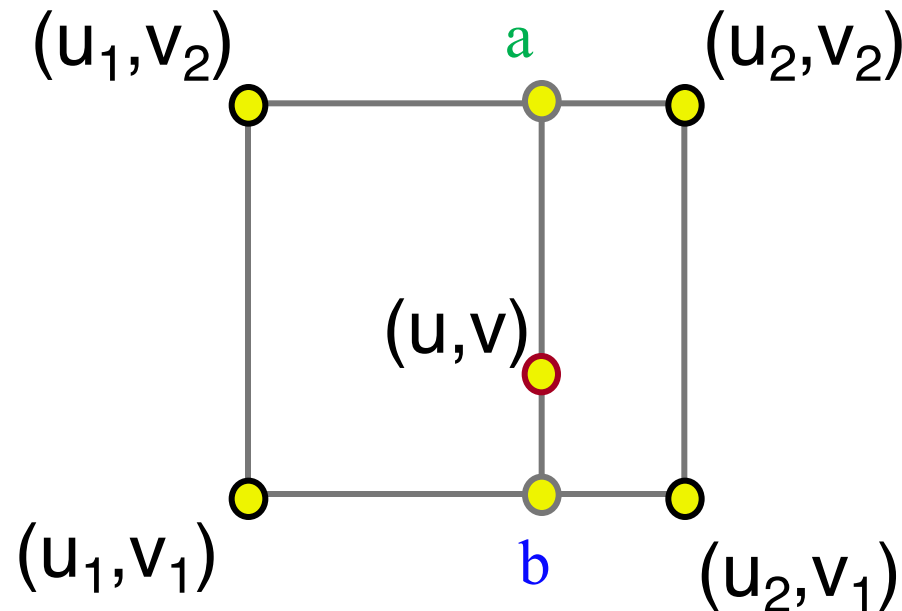


Filter Width < 1

Image Resampling (with width < 1)



- Alternative: force width to be at least 1

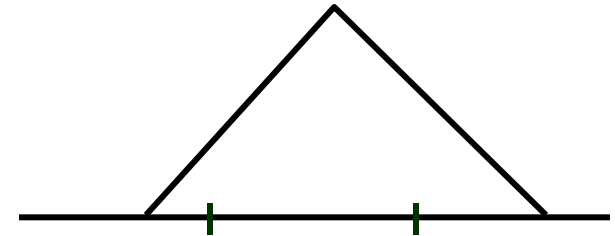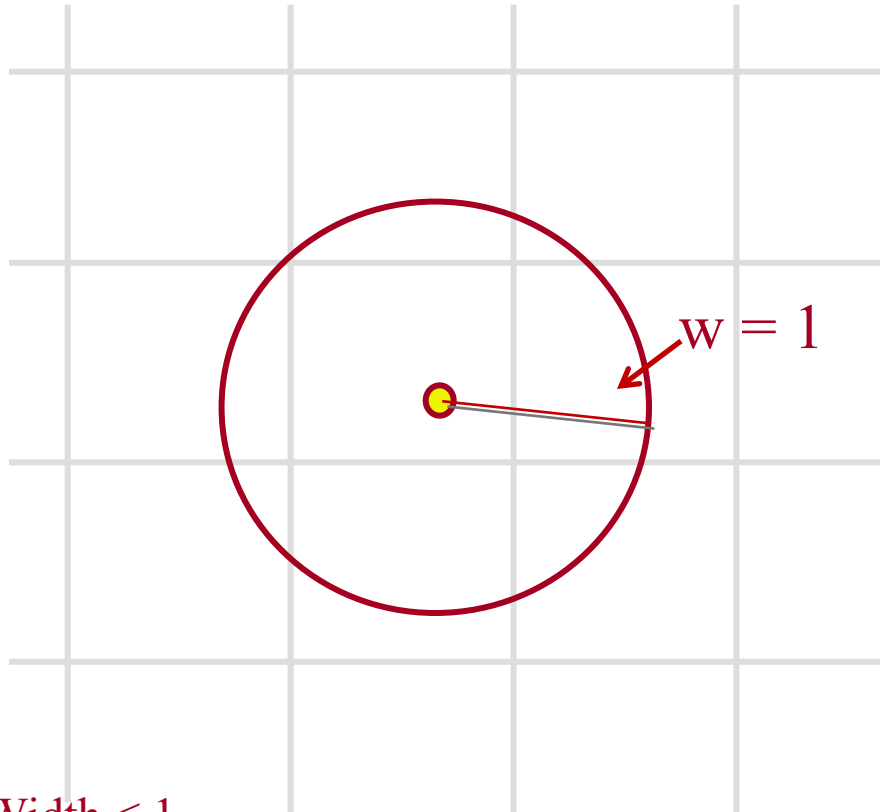


Filter Width < 1



Putting it All Together

- Possible implementation of image scale:

```
Scale(src, dst, sx, sy) {  
    w  $\approx$  max(1/sx, 1/sy);  
    for (int ix = 0; ix < xmax; ix++) {  
        for (int iy = 0; iy < ymax; iy++) {  
            float u = ix / sx;  
            float v = iy / sy;  
            dst(ix, iy) = Resample(src, u, v, k, w);  
        }  
    }  
}
```

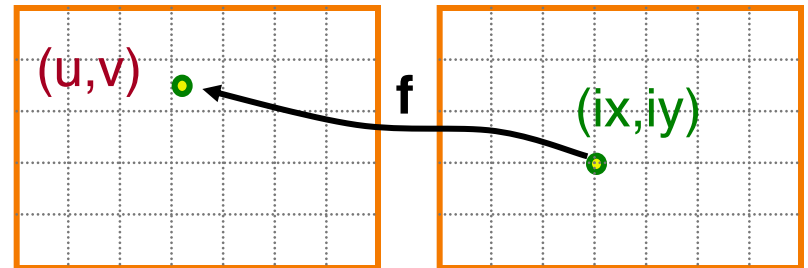


Source image

Destination image

Putting it All Together

- Possible implementation of image rotation:


```
Rotate(src, dst,  $\Theta$ ) {  
    w  $\approx$  1  
    for (int ix = 0; ix < xmax; ix++) {  
        for (int iy = 0; iy < ymax; iy++) {  
            float u = ix*cos(- $\Theta$ ) - iy*sin(- $\Theta$ );  
            float v = ix*sin(- $\Theta$ ) + iy*cos(- $\Theta$ );  
            dst(ix,iy) = Resample(src,u,v,k,w);  
        }  
    }  
}
```

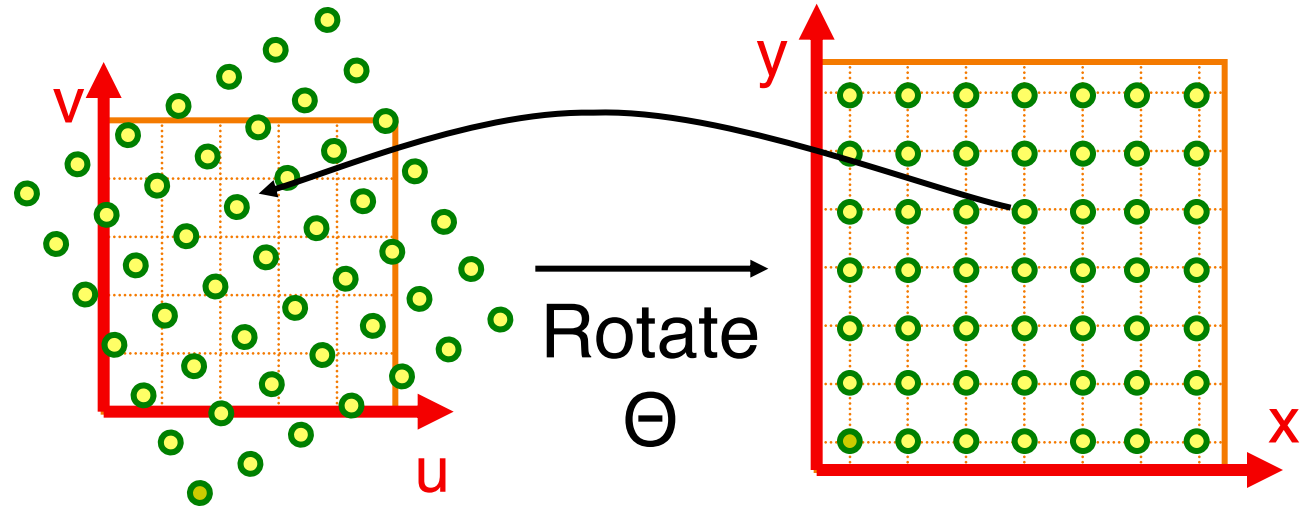

Sampling Method Comparison




- Trade-offs
 - Aliasing versus blurring
 - Computation speed

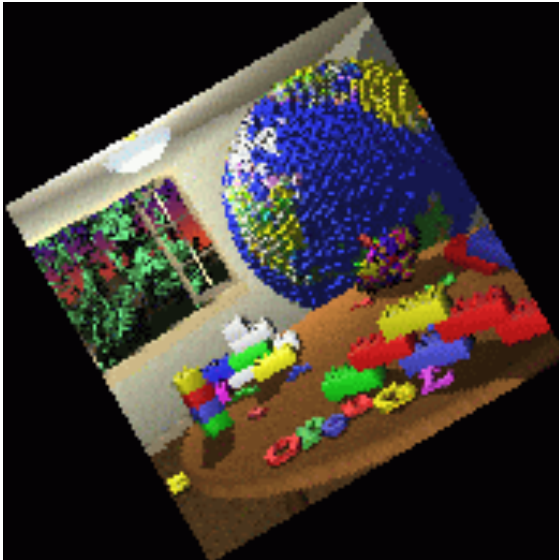

Point



Triangle

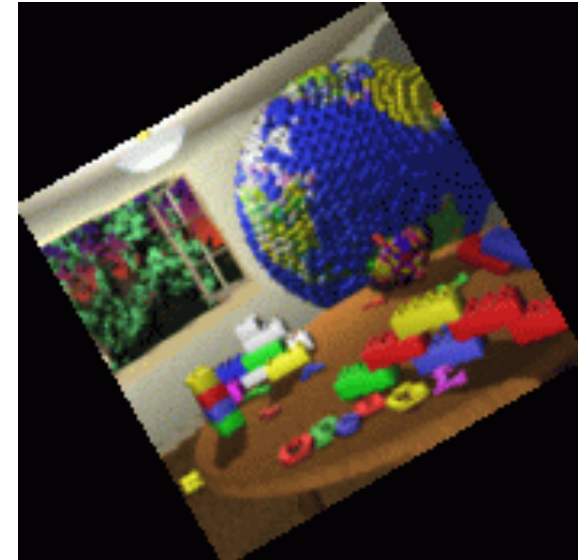


Gaussian

Forward vs. Reverse Mapping

- Reverse mapping:


```
Warp(src, dst) {  
  for (int ix = 0; ix < xmax; ix++) {  
    for (int iy = 0; iy < ymax; iy++) {  
      float w  $\approx$  1 / scale(ix, iy);  
      float u =  $f_x^{-1}$ (ix, iy);  
      float v =  $f_y^{-1}$ (ix, iy);  
      dst(ix, iy) = Resample(src, u, v, w);  
    }  
  }  
}
```

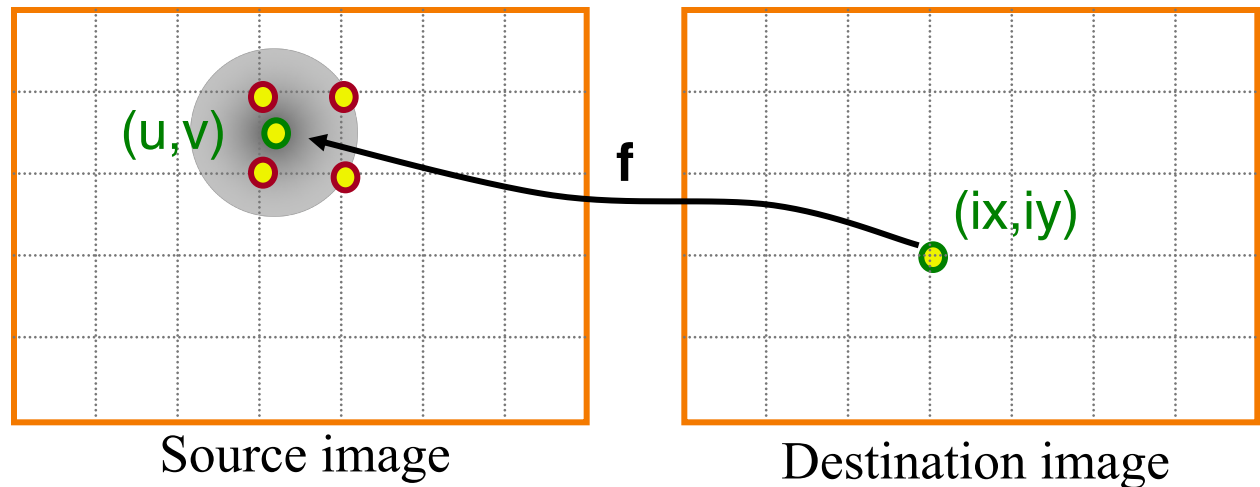

Forward vs. Reverse Mapping

- Forward mapping:


```
Warp(src, dst) {  
  for (int iu = 0; iu < umax; iu++) {  
    for (int iv = 0; iv < vmax; iv++) {  
      float x = fx(iu, iv);  
      float y = fy(iu, iv);  
      float w ≈ 1 / scale(x, y);  
      Splat(src(iu, iv), x, y, k, w);  
    }  
  }  
}
```

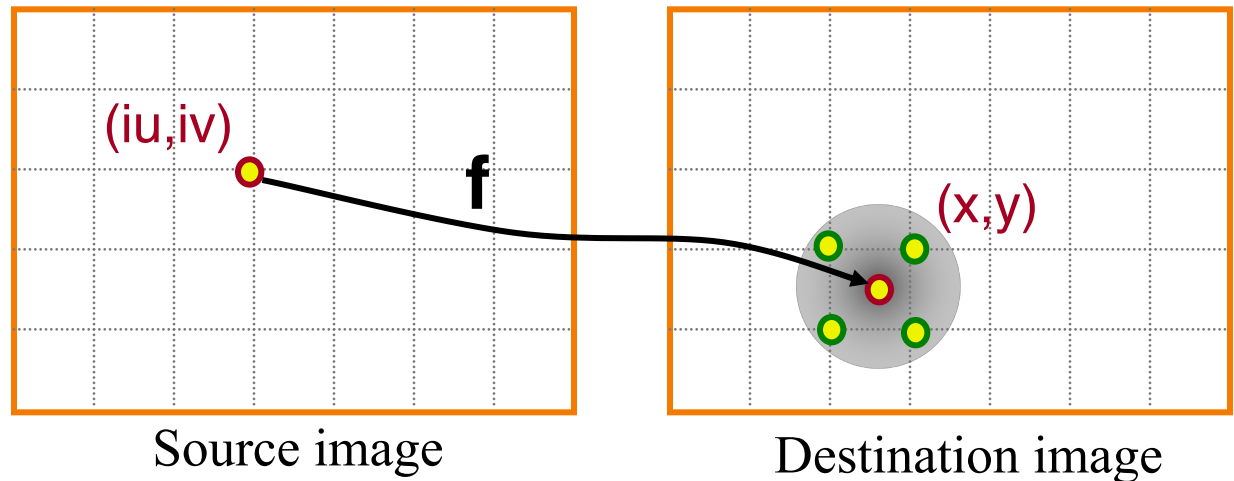

Forward vs. Reverse Mapping

- Forward mapping:

```
Warp(src, dst) {  
  for (int iu = 0; iu < umax; iu++) {  
    for (int iv = 0; iv < vmax; iv++) {  
      float x = fx(iu, iv);  
      float y = fy(iu, iv);  
      float w ≈ 1 / scale(x, y);  
      Splat(src(iu, iv), x, y, k, w);  
    }  
  }  
}
```

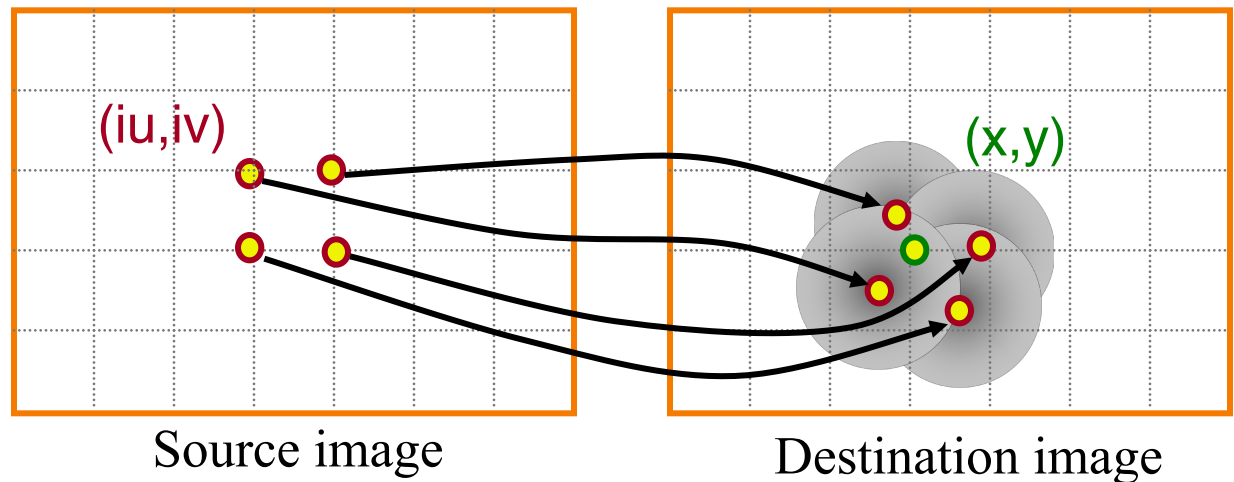


Forward vs. Reverse Mapping

- Forward mapping:

```
for (int iu = 0; iu < umax; iu++) {  
    for (int iv = 0; iv < vmax; iv++) {  
        float x = fx(iu,iv);  
        float y = fy(iu,iv);  
        float w ≈ 1 / scale(x, y);  
        for (int ix = xlo; ix <= xhi; ix++) {  
            for (int iy = ylo; iy <= yhi; iy++) {  
                dst(ix,iy) += k(x,y,ix,iy,w) * src(iu,iv);  
            }  
        }  
    }  
}
```

Problem?

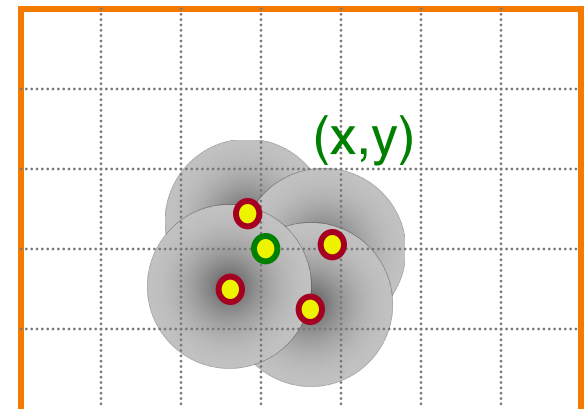


Destination image

Forward vs. Reverse Mapping

- Forward mapping:

```
for (int iu = 0; iu < umax; iu++) {
    for (int iv = 0; iv < vmax; iv++) {
        float x = fx(iu,iv);
        float y = fy(iu,iv);
        float w ≈ 1 / scale(x, y);
        for (int ix = xlo; ix <= xhi; ix++) {
            for (int iy = ylo; iy <= yhi; iy++) {
                dst(ix,iy) += k(x,y,ix,iy,w) * src(iu,iv);
                ksum(ix,iy) += k(x,y,ix,iy,w);
            }
        }
    }
}

for (ix = 0; ix < xmax; ix++)
    for (iy = 0; iy < ymax; iy++)
        dst(ix,iy) /= ksum(ix,iy)
```

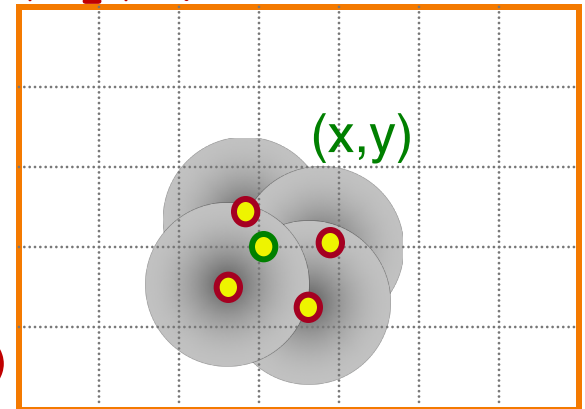

Destination image

Forward vs. Reverse Mapping



- Tradeoffs?

Forward vs. Reverse Mapping



- Tradeoffs:
 - Forward mapping:
 - Requires separate buffer to store weights
 - Reverse mapping:
 - Requires inverse of mapping function, random access to original image

Summary



- Mapping
 - Forward vs. reverse
 - Parametric vs. correspondences
- Sampling, reconstruction, resampling
 - Frequency analysis of signal content
 - Filter to avoid undersampling: point, triangle, Gaussian
 - Reduce visual artifacts due to aliasing
 - » Blurring is better than aliasing

Next Time...



- Changing pixel values
 - Linear: scale, offset, etc.
 - Nonlinear: gamma, saturation, etc.
 - Histogram equalization
- Filtering over neighborhoods
 - Blur & sharpen
 - Detect edges
 - Median
 - Bilateral filter
- Moving image locations
 - Scale
 - Rotate
 - Warp
- Combining images
 - Composite
 - Morph
- Quantization
- Spatial / intensity tradeoff
 - Dithering