


4.4 Symbol Tables

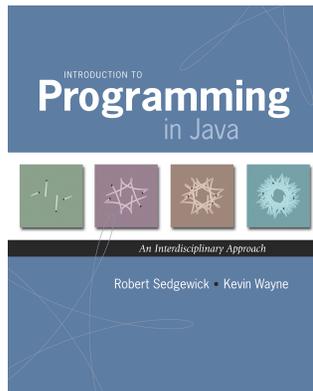

Introduction to Programming in Java: An Interdisciplinary Approach · Robert Sedgewick and Kevin Wayne · Copyright © 2008 · * * *

Symbol table. Key-value pair abstraction.

- **Insert** a key with specified value.
- Given a key, **search** for the corresponding value.

Ex. [DNS lookup]

- Insert URL with specified IP address.
- Given URL, find corresponding IP address.

URL	IP address
www.cs.princeton.edu	128.112.136.11
www.princeton.edu	128.112.128.15
www.yale.edu	130.132.143.21
www.harvard.edu	128.103.060.55
www.simpsons.com	209.052.165.60

key

value

Symbol Table Applications

Application	Purpose	Key	Value
phone book	look up phone number	name	phone number
bank	process transaction	account number	transaction details
file share	find song to download	name of song	computer ID
file system	find file on disk	filename	location on disk
dictionary	look up word	word	definition
web search	find relevant documents	keyword	list of documents
book index	find relevant pages	keyword	list of pages
web cache	download	filename	file contents
genomics	find markers	DNA string	known positions
DNS	find IP address given URL	URL	IP address
reverse DNS	find URL given IP address	IP address	URL
compiler	find properties of variable	variable name	value and type
routing table	route Internet packets	destination	best route

Symbol Table API

```
public class ST<Key extends Comparable<Key>, Value>
{
    ST() create a symbol table
    void put(Key key, Value v) put key-value pair into the table
    Value get(Key key) return value paired with key, null if key not in table
    boolean contains(Key key) is there a value paired with key?
}
```

```
public static void main(String[] args) {
    ST<String, String> st = new ST<String, String>();
    st.put("www.cs.princeton.edu", "128.112.136.11");
    st.put("www.princeton.edu", "128.112.128.15");
    st.put("www.yale.edu", "130.132.143.21");
    st["www.yale.com"] = "209.052.165.60";
    StdOut.println(st.get("www.cs.princeton.edu"));
    StdOut.println(st.get("www.harvardsucks.com"));
    StdOut.println(st.get("www.yale.edu"));
}
```

```
128.112.136.11
null
130.132.143.21
```

Symbol Table Client: Frequency Counter

Datasets

Frequency counter. [e.g., web traffic analysis, linguistic analysis]

- Read in a key.
- If key is in symbol table, increment counter by one;
If key is not in symbol table, insert it with count = 1.

```
public class Freq {
    public static void main(String[] args) {
        ST<String, Integer> st = new ST<String, Integer>();
        while (!StdIn.isEmpty()) {
            String key = StdIn.readString();
            if (st.contains(key)) st.put(key, st.get(key) + 1);
            else st.put(key, 1);
        }
        for (String s : st)
            StdOut.println(st.get(s) + " " + s);
    }
}
```

Annotations: key type, value type, calculate frequencies, enhanced for loop (stay tuned), print results

Linguistic analysis. Compute word frequencies in a piece of text.

File	Description	Words	Distinct
mobydick.txt	Melville's Moby Dick	210,028	16,834
leipzig100k.txt	100K random sentences	2,121,054	144,256
leipzig200k.txt	200K random sentences	4,238,435	215,515
leipzig1m.txt	1M random sentences	21,191,455	534,580

Reference: Wortschatz corpus, Universität Leipzig
<http://corpora.informatik.uni-leipzig.de>

6

7

Zipf's Law

Linguistic analysis. Compute word frequencies in a piece of text.

```
% java Freq < mobydick.txt
4583 a
2 aback
2 abaft
3 abandon
7 abandoned
1 abandonedly
2 abandonment
2 abased
1 abasement
2 abashed
1 abate
...

% java Freq < mobydick.txt | sort -rn
13967 the
6415 of
6247 and
4583 a
4508 to
4037 in
2911 that
2481 his
2370 it
1940 i
1793 but
...
```

Zipf's law. In natural language, frequency of i^{th} most common word is inversely proportional to i .

e.g., most frequent word occurs about twice as often as second most frequent one

8

Zipf's Law

Linguistic analysis. Compute word frequencies in a piece of text.

```
% java Freq < leipzig1m.txt | sort -rn
1160105 the
593492 of
560945 to
472819 a
435866 and
430484 in
205531 for
192296 The
188971 that
172225 is
148915 said
147024 on
141178 was
118429 by
...
```

Zipf's law. In natural language, frequency of i^{th} most common word is inversely proportional to i .

e.g., most frequent word occurs about twice as often as second most frequent one

9


Binary Search Trees

Def. A **binary search tree** is a binary tree in symmetric order.

Binary tree is either:


- Empty.
- A key-value pair and two binary trees.

we suppress values from figures




Symmetric order.

- Keys in left subtree are smaller than parent.
- Keys in right subtree are larger than parent.




14

BST Search

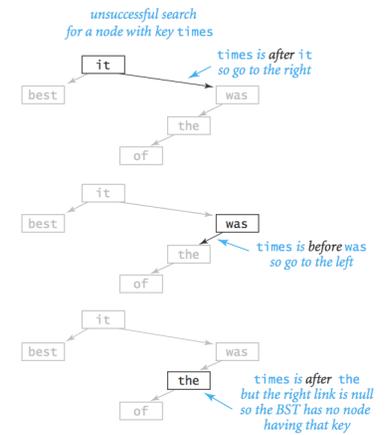


15

BST Insert

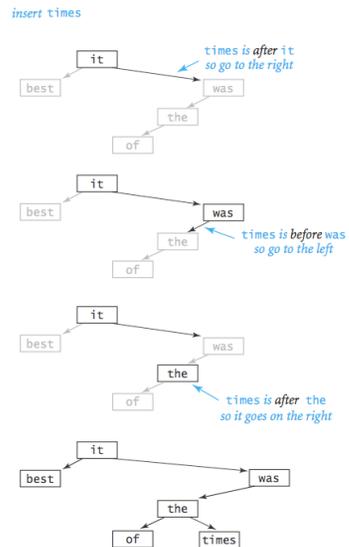

16

BST Construction

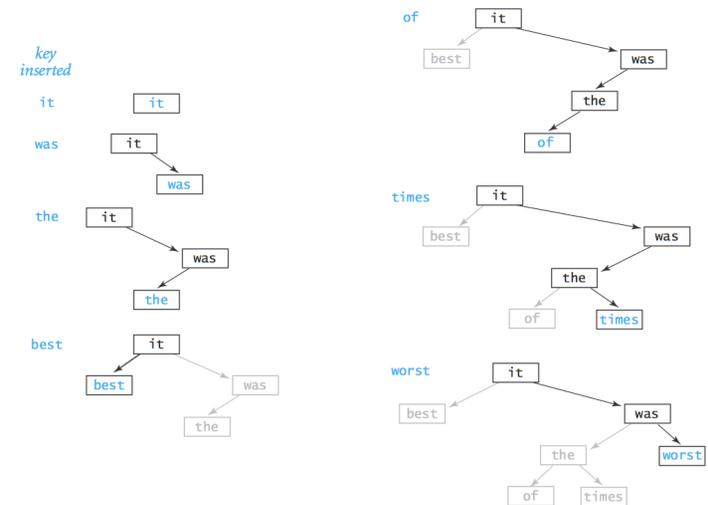

17


Binary Search Tree: Java Implementation

To implement: use **two** links per **Node**.

A **Node** is comprised of:

- A key.
- A value.
- A reference to the left subtree.
- A reference to the right subtree.

```
private class Node {
    private Key key;
    private Val val;
    private Node left;
    private Node right;
}
```

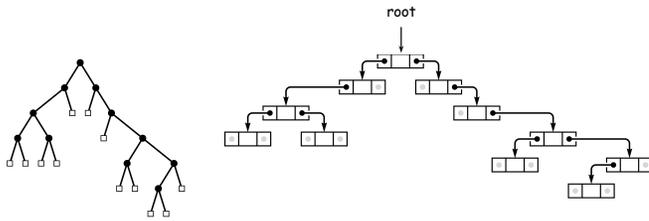

BST: Skeleton

BST. Allow generic keys and values.

requires Key to provide compareTo() method;
see book for details

```
public class BST<Key extends Comparable<Key>, Val> {
    private Node root; // root of the BST

    private class Node {
        private Key key;
        private Val val;
        private Node left, right;

        private Node(Key key, Val val) {
            this.key = key;
            this.val = val;
        }
    }

    public void put(Key key, Val val) { ... }
    public Val get(Key key) { ... }
    public boolean contains(Key key) { ... }
}
```

18

19

BST: Search

Get. Return **val** corresponding to given **key**, or **null** if no such **key**.

```
public Val get(Key key) {
    return get(root, key);
}

private Val get(Node x, Key key) {
    if (x == null) return null;
    int cmp = key.compareTo(x.key);
    if (cmp < 0) return get(x.left, key);
    else if (cmp > 0) return get(x.right, key);
    else return x.val;
}

public boolean contains(Key key) {
    return (get(key) != null);
}
```

negative if less,
zero if equal,
positive if greater

20

BST: Insert

Put. Associate **val** with **key**.

- Search, then insert.
- Concise (but tricky) recursive code.

```
public void put(Key key, Val val) {
    root = insert(root, key, val);
}

private Node insert(Node x, Key key, Val val) {
    if (x == null) return new Node(key, val);
    int cmp = key.compareTo(x.key);
    if (cmp < 0) x.left = insert(x.left, key, val);
    else if (cmp > 0) x.right = insert(x.right, key, val);
    else x.val = val;
    return x;
}
```

overwrite old value with new value

21

BST Implementation: Practice

Bottom line. Difference between a practical solution and no solution.


implementation	Running Time		Frequency Count			
	get	put	Moby	100K	200K	1M
unordered array	N	N	170 sec	4.1 hr	-	-
ordered array	$\log N$	N	5.8 sec	5.8 min	15 min	2.1 hr
BST	?	?	.95 sec	7.1 sec	14 sec	69 sec

BST: Analysis

Running time per put/get.

- There are many BSTs that correspond to same set of keys.
- Cost is proportional to **depth** of node.

number of nodes on path from root to node

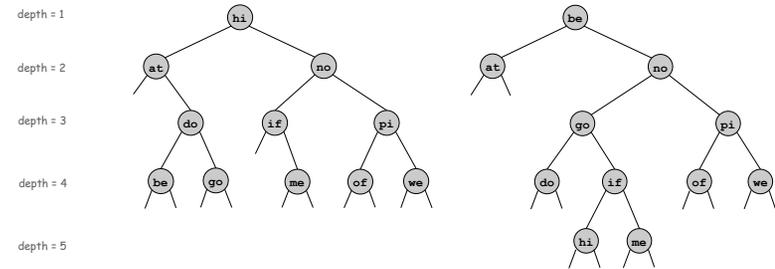


22

23

BST: Analysis


Best case. If tree is perfectly balanced, depth is at most $\lg N$.

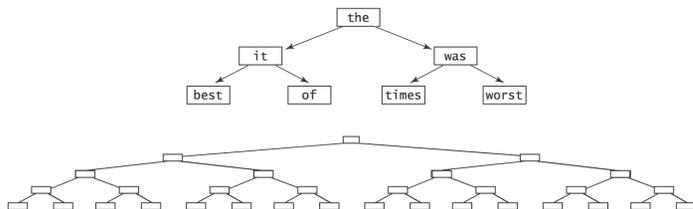

24

BST: Analysis


Worst case. If tree is unbalanced, depth is N .

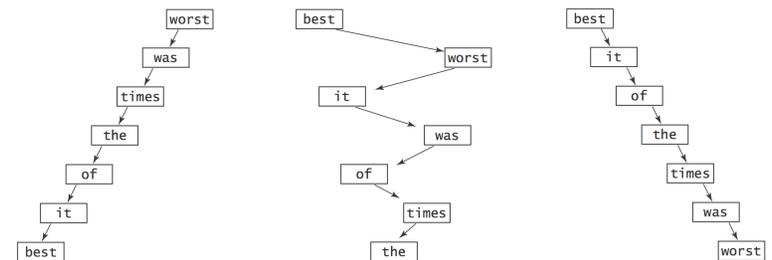

25

BST: Analysis

Average case. If keys are inserted in random order, average depth is $2 \ln N$.

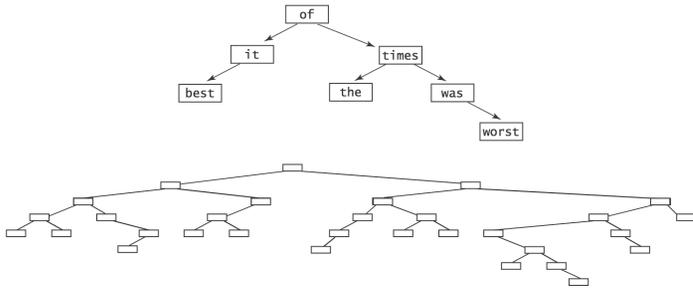

Typical BSTs constructed from randomly ordered keys

Red-Black Tree

Red-black tree. A clever BST variant that **guarantees** depth $\leq 2 \lg N$.

see COS 226

```
import java.util.TreeMap;
import java.util.Iterator;

public class ST<Key extends Comparable<Key>, Val> implements Iterable<Key> {
    private TreeMap<Key, Val> st = new TreeMap<Key, Val>();

    public void put(Key key, Val val) {
        if (val == null) st.remove(key);
        else st.put(key, val);
    }

    public Val get(Key key) { return st.get(key); }
    public Val remove(Key key) { return st.remove(key); }
    public boolean contains(Key key) { return st.containsKey(key); }
    public Iterator<Key> iterator() { return st.keySet().iterator(); }
}
```

Symbol Table: Implementations Cost Summary

BST. Logarithmic time ops if keys inserted in **random** order.

implementation	Running Time			Frequency Count		
	get	put	Moby	100K	200K	1M
unordered array	N	N	170 sec	4.1 hr	-	-
ordered array	$\log N$	N	5.8 sec	5.8 min	15 min	2.1 hr
BST	$\log N^\dagger$	$\log N^\dagger$.95 sec	7.1 sec	14 sec	69 sec

\dagger assumes keys inserted in random order

Q. Can we guarantee logarithmic performance?

Red-Black Tree

Red-black tree. A clever BST variant that **guarantees** depth $\leq 2 \lg N$.

see COS 226

implementation	Running Time			Frequency Count		
	get	put	Moby	100K	200K	1M
unordered array	N	N	170 sec	4.1 hr	-	-
ordered array	$\log N$	N	5.8 sec	5.8 min	15 min	2.1 hr
BST	$\log N^\dagger$	$\log N^\dagger$.95 sec	7.1 sec	14 sec	69 sec
red-black	$\log N$	$\log N$.95 sec	7.0 sec	14 sec	74 sec


\dagger assumes keys inserted in random order

Iteration

Inorder Traversal

Inorder traversal.

- Recursively visit left subtree.
- Visit node.
- Recursively visit right subtree.



inorder: at be do go hi if me no of pi we

```
public inorder() { inorder(root); }

private void inorder(Node x) {
    if (x == null) return;
    inorder(x.left);
    StdOut.println(x.key);
    inorder(x.right);
}
```



30

31

Enhanced For Loop

Enhanced for loop. Enable client to iterate over items in a collection.

```
ST<String, Integer> st = new ST<String, Integer>();
...
for (String s : st) {
    StdOut.println(st.get(s) + " " + s);
}
```

32

Enhanced For Loop with BST

BST. Add following code to support enhanced for loop.

see COS 226 for details

```
import java.util.Iterator;
import java.util.NoSuchElementException;

public class BST<Key extends Comparable<Key>, Val> implements Iterable<Key> {
    private Node root;
    private class Node { ... }
    public void put(Key key, Val val) { ... }
    public Val get(Key key) { ... }
    public boolean contains(Key key) { ... }

    public Iterator<Key> iterator() { return new Inorder(); }
    private class Inorder implements Iterator<Key> {
        Inorder() { pushLeft(root); }
        public void remove() { throw new UnsupportedOperationException(); }
        public boolean hasNext() { return !stack.isEmpty(); }
        public Key next() {
            if (!hasNext()) throw new NoSuchElementException();
            Node x = stack.pop();
            pushLeft(x.right);
            return x.key;
        }
        public void pushLeft(Node x) {
            while (x != null) {
                stack.push(x);
                x = x.left;
            }
        }
    }
}
```

33

Symbol Table: Summary

Symbol table. Quintessential database lookup data type.

Choices. Ordered array, unordered array, BST, red-black, hash,

- Different performance characteristics.
- Java libraries: `TreeMap`, `HashMap`.

Remark. Better symbol table implementation improves **all** clients.


Other Types of Trees

34

Other Types of Trees

Other types of trees.

- Ancestor tree.

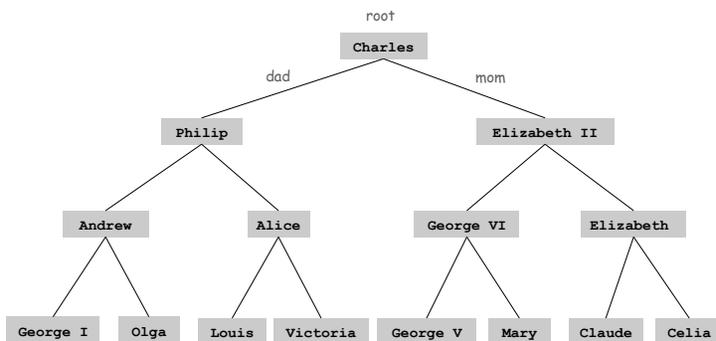


36

Other Types of Trees

Other types of trees.

- Ancestor tree.
- Parse tree: represents the syntactic structure of a statement, sentence, or expression.




$(10 * 12) + 7$

37

Other Types of Trees

Other types of trees.

- Ancestor tree.
- Parse tree.
- Unix file hierarchy.

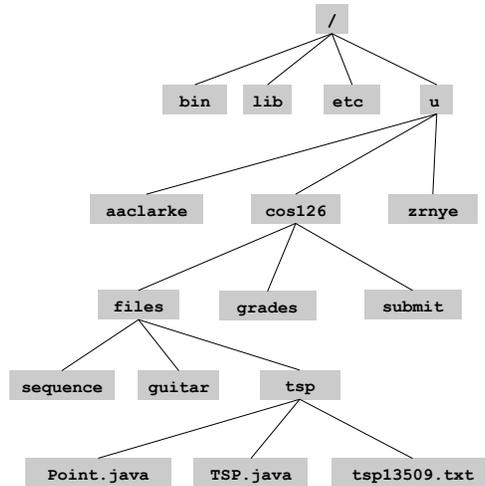


38

Other Types of Trees

Other types of trees.

- Ancestor tree.
- Parse tree.
- Unix file hierarchy.
- Phylogeny tree.




39

Other Types of Trees

Other types of trees.

- Ancestor tree.
- Parse tree.
- Unix file hierarchy.
- Phylogeny tree.
- GUI containment hierarchy.
- Tournament trees.

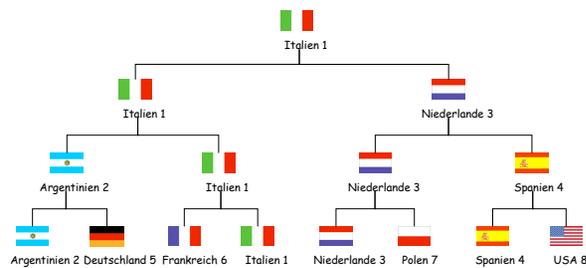

Reference: Tobias Lauer

40