

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

2.1 ELEMENTARY SORTS

- ▶ *rules of the game*
- ▶ *selection sort*
- ▶ *insertion sort*
- ▶ *shellsort*
- ▶ *shuffling*
- ▶ *convex hull*

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

Sorting problem

Ex. Student records in a university.

item →	Chen	3	A	991-878-4944	308 Blair
	Rohde	2	A	232-343-5555	343 Forbes
	Gazsi	4	B	766-093-9873	101 Brown
	Furia	1	A	766-093-9873	101 Brown
	Kanaga	3	B	898-122-9643	22 Brown
	Andrews	3	A	664-480-0023	097 Little
key →	Battle	4	C	874-088-1212	121 Whitman

Sort. Rearrange array of N items into ascending order.

Andrews	3	A	664-480-0023	097 Little
Battle	4	C	874-088-1212	121 Whitman
Chen	3	A	991-878-4944	308 Blair
Furia	1	A	766-093-9873	101 Brown
Gazsi	4	B	766-093-9873	101 Brown
Kanaga	3	B	898-122-9643	22 Brown
Rohde	2	A	232-343-5555	343 Forbes

Sample sort client 1

Goal. Sort **any** type of data.

Ex 1. Sort random real numbers in ascending order.

seems artificial, but stay tuned for an application

```
public class Experiment
{
    public static void main(String[] args)
    {
        int N = Integer.parseInt(args[0]);
        Double[] a = new Double[N];
        for (int i = 0; i < N; i++)
            a[i] = StdRandom.uniform();
        Insertion.sort(a);
        for (int i = 0; i < N; i++)
            StdOut.println(a[i]);
    }
}
```

```
% java Experiment 10
0.08614716385210452
0.09054270895414829
0.10708746304898642
0.21166190071646818
0.363292849257276
0.460954145685913
0.5340026311350087
0.7216129793703496
0.9003500354411443
0.9293994908845686
```

Sample sort client 2

Goal. Sort **any** type of data.

Ex 2. Sort strings from file in alphabetical order.

```
public class StringSorter
{
    public static void main(String[] args)
    {
        String[] a = In.readStrings(args[0]);
        Insertion.sort(a);
        for (int i = 0; i < a.length; i++)
            StdOut.println(a[i]);
    }
}

% more words3.txt
bed bug dad yet zoo ... all bad yes

% java StringSorter words3.txt
all bad bed bug dad ... yes yet zoo
```

Sample sort client 3

Goal. Sort **any** type of data.

Ex 3. Sort the files in a given directory by filename.

```
import java.io.File;
public class FileSorter
{
    public static void main(String[] args)
    {
        File directory = new File(args[0]);
        File[] files = directory.listFiles();
        Insertion.sort(files);
        for (int i = 0; i < files.length; i++)
            StdOut.println(files[i].getName());
    }
}
```

```
% java FileSorter .
Insertion.class
Insertion.java
InsertionX.class
InsertionX.java
Selection.class
Selection.java
Shell.class
Shell.java
ShellX.class
ShellX.java
```

Callbacks

Goal. Sort **any** type of data.

Q. How can sort() know how to compare data of type Double, String, and java.io.File without any information about the type of an item's key?

Callback = reference to executable code.

- Client passes array of objects to sort() function.
- The sort() function calls back object's compareTo() method as needed.

Implementing callbacks.

- Java: **interfaces**.
- C: function pointers.
- C++: class-type functors.
- C#: delegates.
- Python, Perl, ML, Javascript: first-class functions.

Callbacks: roadmap

client

```
import java.io.File;
public class FileSorter
{
    public static void main(String[] args)
    {
        File directory = new File(args[0]);
        File[] files = directory.listFiles();
        Insertion.sort(files);
        for (int i = 0; i < files.length; i++)
            StdOut.println(files[i].getName());
    }
}
```

object implementation

```
public class File
implements Comparable<File>
{
    ...
    public int compareTo(File b)
    {
        ...
        return -1;
        ...
        return +1;
        ...
        return 0;
    }
}
```

Comparable interface (built in to Java)

```
public interface Comparable<Item>
{
    public int compareTo(Item that);
}
```

key point: no dependence
on File data type

sort implementation

```
public static void sort(Comparable[] a)
{
    int N = a.length;
    for (int i = 0; i < N; i++)
        for (int j = i; j > 0; j--)
            if (a[j].compareTo(a[j-1]) < 0)
                exch(a, j, j-1);
            else break;
}
```

Total order

A **total order** is a binary relation \leq that satisfies:

- Antisymmetry: if $v \leq w$ and $w \leq v$, then $v = w$.
- Transitivity: if $v \leq w$ and $w \leq x$, then $v \leq x$.
- Totality: either $v \leq w$ or $w \leq v$ or both.

Ex.

- Standard order for natural and real numbers.
- Chronological order for dates or times.
- Alphabetical order for strings.
- ...



violates totality: `(Double.NaN <= Double.NaN) is false`

Surprising but true. The `<=` operator for double is not a total order. (!)

Comparable API

Implement `compareTo()` so that `v.compareTo(w)`

- Is a total order.
- Returns a negative integer, zero, or positive integer if v is less than, equal to, or greater than w , respectively.
- Throws an exception if incompatible types (or either is `null`).



Implementing the Comparable interface

Date data type. Simplified version of `java.util.Date`.

```
public class Date implements Comparable<Date>
{
    private final int month, day, year;

    public Date(int m, int d, int y)
    {
        month = m;
        day   = d;
        year  = y;
    }

    public int compareTo(Date that)
    {
        if (this.year < that.year) return -1;
        if (this.year > that.year) return +1;
        if (this.month < that.month) return -1;
        if (this.month > that.month) return +1;
        if (this.day < that.day) return -1;
        if (this.day > that.day) return +1;
        return 0;
    }
}
```

only compare dates
to other dates

Two useful sorting abstractions

Helper functions. Refer to data through compares and exchanges.

Less. Is item v less than w ?

```
private static boolean less(Comparable v, Comparable w)
{   return v.compareTo(w) < 0; }
```

Exchange. Swap item in array $a[]$ at index i with the one at index j .

```
private static void exch(Comparable[] a, int i, int j)
{
    Comparable swap = a[i];
    a[i] = a[j];
    a[j] = swap;
}
```

Testing

Goal. Test if an array is sorted.

```
private static boolean isSorted(Comparable[] a)
{
    for (int i = 1; i < a.length; i++)
        if (less(a[i], a[i-1])) return false;
    return true;
}
```


Q. If the sorting algorithm passes the test, did it correctly sort the array?

A.

13

Selection sort demo

- In iteration i , find index \min of smallest remaining entry.
- Swap $a[i]$ and $a[\min]$.

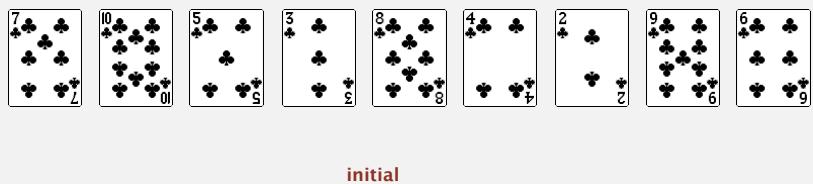

14

Selection sort

Algorithm. ↑ scans from left to right.

Invariants.

- Entries to the left of ↑ (including ↑) fixed and in ascending order.
- No entry to right of ↑ is smaller than any entry to the left of ↑.



15

2.1 ELEMENTARY SORTS

► rules of the game

► selection sort

► insertion sort

► shellsort

► shuffling

► convex hull

16

Selection sort inner loop

To maintain algorithm invariants:

- Move the pointer to the right.

```
i++;
```



- Identify index of minimum entry on right.

```
int min = i;
for (int j = i+1; j < N; j++)
    if (less(a[j], a[min]))
        min = j;
```



- Exchange into position.

```
exch(a, i, min);
```



17

Selection sort: mathematical analysis

Proposition. Selection sort uses $(N-1) + (N-2) + \dots + 1 + 0 \sim N^2/2$ compares and N exchanges.

	a[]											
i	min	0	1	2	3	4	5	6	7	8	9	10
0	6	S	O	R	T	E	X	A	M	P	L	E
1	4	S	O	R	T	E	X	A	M	P	L	E
2	10	A	E	R	T	O	X	S	M	P	L	E
3	9	A	E	E	T	O	X	S	M	P	L	R
4	7	A	E	E	L	O	X	S	M	P	T	R
5	7	A	E	E	L	M	X	S	O	P	T	R
6	8	A	E	E	L	M	O	S	X	P	T	R
7	10	A	E	E	L	M	O	P	X	S	T	R
8	8	A	E	E	L	M	O	P	R	S	T	X
9	9	A	E	E	L	M	O	P	R	S	T	X
10	10	A	E	E	L	M	O	P	R	S	T	X

Trace of selection sort (array contents just after each exchange)

Running time insensitive to input. Quadratic time, even if input is sorted.

Data movement is minimal. Linear number of exchanges.

Selection sort: Java implementation

```
public class Selection
{
    public static void sort(Comparable[] a)
    {
        int N = a.length;
        for (int i = 0; i < N; i++)
        {
            int min = i;
            for (int j = i+1; j < N; j++)
                if (less(a[j], a[min]))
                    min = j;
            exch(a, i, min);
        }
    }

    private static boolean less(Comparable v, Comparable w)
    { /* as before */ }

    private static void exch(Comparable[] a, int i, int j)
    { /* as before */ }
}
```

18

Selection sort: animations

20 random items



▲ algorithm position
— in final order
█ not in final order

<http://www.sorting-algorithms.com/selection-sort>

19


20

Selection sort: animations



<http://www.sorting-algorithms.com/selection-sort>

21

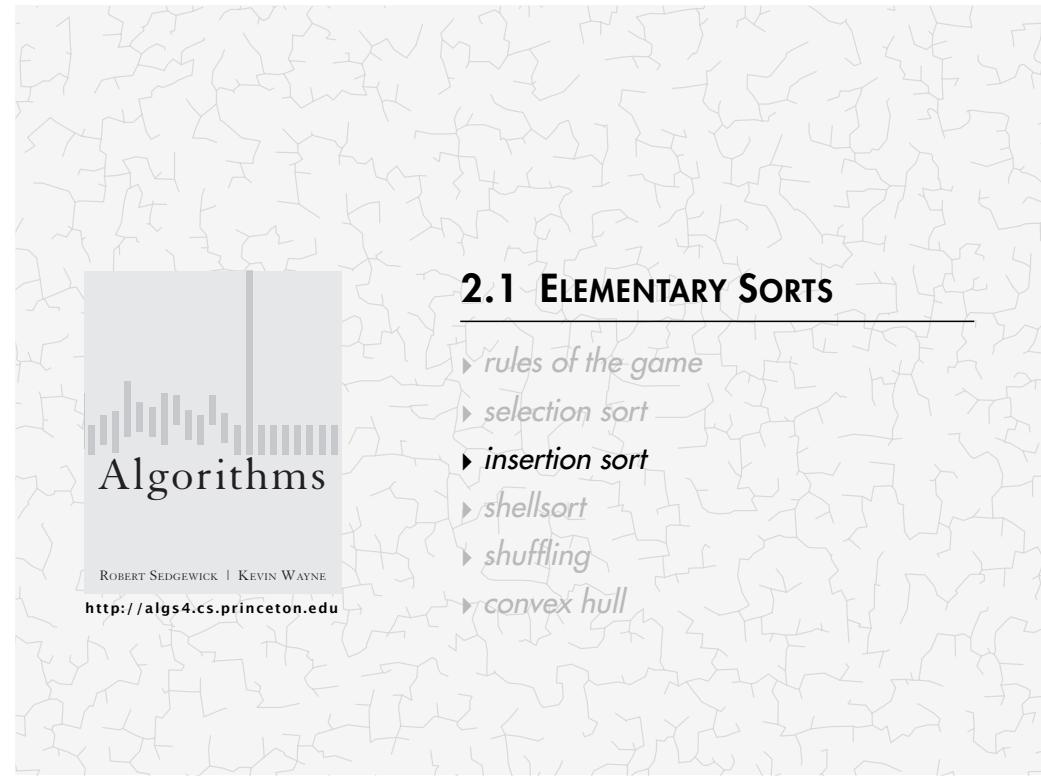


2.1 ELEMENTARY SORTS

- ▶ rules of the game
- ▶ selection sort
- ▶ insertion sort
- ▶ shellsort
- ▶ shuffling
- ▶ convex hull

Insertion sort demo

- In iteration i , swap $a[i]$ with each larger entry to its left.

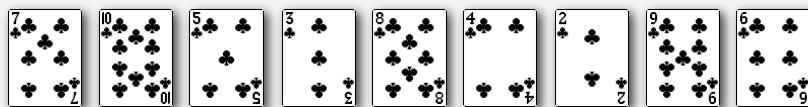

23

Insertion sort

Algorithm. \uparrow scans from left to right.

Invariants.

- Entries to the left of \uparrow (including \uparrow) are in ascending order.
- Entries to the right of \uparrow have not yet been seen.



24

Insertion sort inner loop

To maintain algorithm invariants:

- Move the pointer to the right.

i++;



- Moving from right to left, exchange $a[i]$ with each larger entry to its left.

```
for (int j = i; j > 0; j--)
    if (less(a[j], a[j-1]))
        exch(a, j, j-1);
    else break;
```



25

Insertion sort: Java implementation

```
public class Insertion
{
    public static void sort(Comparable[] a)
    {
        int N = a.length;
        for (int i = 0; i < N; i++)
            for (int j = i; j > 0; j--)
                if (less(a[j], a[j-1]))
                    exch(a, j, j-1);
                else break;
    }

    private static boolean less(Comparable v, Comparable w)
    { /* as before */ }

    private static void exch(Comparable[] a, int i, int j)
    { /* as before */ }
}
```

26

Insertion sort: mathematical analysis

Proposition. To sort a randomly-ordered array with distinct keys, insertion sort uses $\sim \frac{1}{4}N^2$ compares and $\sim \frac{1}{4}N^2$ exchanges on average.

Pf. Expect each entry to move halfway back.

a[]												
i	j	0	1	2	3	4	5	6	7	8	9	10
1	0	O	S	R	T	E	X	A	M	P	L	E
2	1	O	R	S	T	E	X	A	M	P	L	E
3	3	O	R	S	T	E	X	A	M	P	L	E
4	0	E	O	R	S	T	X	A	M	P	L	E
5	5	E	O	R	S	T	X	A	M	P	L	E
6	0	A	E	O	R	S	T	X	M	P	L	E
7	2	A	E	M	O	R	S	T	X	P	L	E
8	4	A	E	M	O	P	R	S	T	X	L	E
9	2	A	E	L	M	O	P	R	S	T	X	E
10	2	A	E	E	L	M	O	P	R	S	T	X
		A	E	E	L	M	O	P	R	S	T	X

Trace of insertion sort (array contents just after each insertion)

Insertion sort: trace


a[]												
0	0	A	S	O	M	E	W	H	A	T	L	O
1	1	A	S	O	M	E	W	H	A	T	L	O
2	1	A	O	S	M	E	W	H	A	T	L	O
3	3	A	M	O	S	E	W	H	A	T	L	O
4	1	A	E	M	O	S	E	W	H	A	T	L
5	5	A	E	N	O	S	E	W	H	A	T	L
6	2	A	E	H	M	O	S	E	W	H	A	T
7	7	A	A	E	H	M	O	S	E	W	H	A
8	7	A	A	E	H	M	O	S	E	W	H	A
9	4	A	A	E	H	L	M	O	S	E	W	H
10	7	A	A	E	H	L	M	O	S	E	W	H
11	6	A	A	E	H	L	M	N	O	S	E	W
12	3	A	A	E	G	H	L	M	N	O	S	E
13	3	A	A	E	G	H	L	M	N	O	S	E
14	11	A	A	E	E	G	H	L	M	N	O	S
15	6	A	A	E	E	G	H	I	L	M	N	O
16	10	A	A	E	E	G	H	I	L	M	N	O
17	15	A	A	E	E	G	H	I	L	M	N	O
18	4	A	A	E	E	G	H	I	L	M	N	O
19	15	A	A	E	E	G	H	I	L	M	N	O
20	19	A	A	E	E	G	H	I	L	M	N	O
21	8	A	A	E	E	G	H	I	L	M	N	O
22	15	A	A	E	E	G	H	I	L	M	N	O
23	13	A	A	E	E	G	H	I	L	M	N	O
24	21	A	A	E	E	G	H	I	L	M	N	O
25	17	A	A	E	E	G	H	I	L	M	N	O
26	20	A	A	E	E	G	H	I	L	M	N	O
27	26	A	A	E	E	G	H	I	L	M	N	O
28	5	A	A	E	E	G	H	I	L	M	N	O
29	29	A	A	E	E	E	G	H	I	L	M	N
30	2	A	A	A	E	E	E	G	H	I	L	M
31	13	A	A	A	E	E	E	G	H	I	L	M
32	21	A	A	A	E	E	E	G	H	I	L	M
33	12	A	A	A	E	E	E	G	H	I	L	M
34	7	A	A	A	E	E	E	G	H	I	L	M

27

28

Insertion sort: animation

40 random items

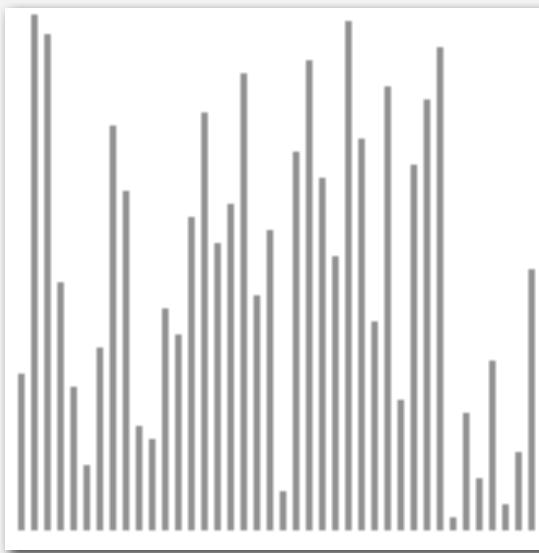

29

Insertion sort: best and worst case

Best case. If the array is in ascending order, insertion sort makes $N-1$ compares and 0 exchanges.

A E E L M O P R S T X


Worst case. If the array is in descending order (and no duplicates), insertion sort makes $\sim \frac{1}{2} N^2$ compares and $\sim \frac{1}{2} N^2$ exchanges.

X T S R P O M L E E A

30

Insertion sort: animation

40 reverse-sorted items

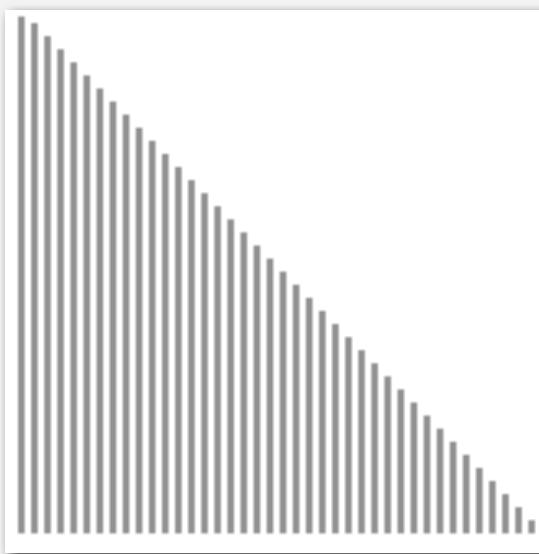

31

Insertion sort: partially-sorted arrays

Def. An **inversion** is a pair of keys that are out of order.

A E E L M O T R X P S

T-R T-P T-S R-P X-P X-S
(6 inversions)

Def. An array is **partially sorted** if the number of inversions is $\leq c N$.

- Ex 1. A subarray of size 10 appended to a sorted subarray of size N .
- Ex 2. An array of size N with only 10 entries out of place.

Proposition. For partially-sorted arrays, insertion sort runs in linear time.


Pf. Number of exchanges equals the number of inversions.

$$\text{number of compares} = \text{exchanges} + (N - 1)$$

32

Insertion sort: animation

40 partially-sorted items

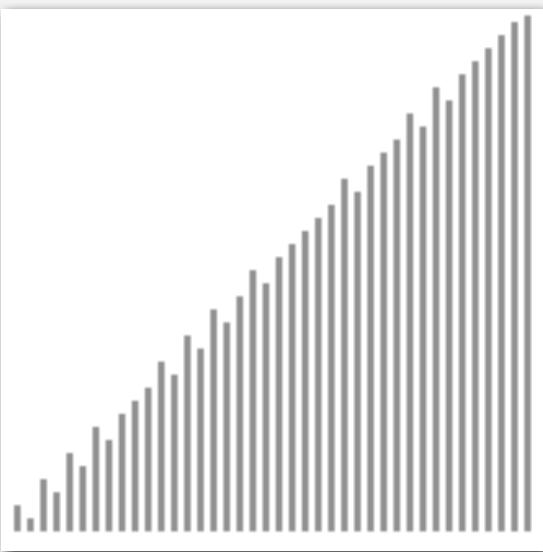

<http://www.sorting-algorithms.com/insertion-sort>

33

- ▲ algorithm position
- in order
- not yet seen

Shellsort overview

Idea. Move entries more than one position at a time by *h*-sorting the array.


an *h*-sorted array is *h* interleaved sorted subsequences



Shellsort. [Shell 1959] *h*-sort array for decreasing sequence of values of *h*.


input S H E L L S O R T E X A M P L E
13-sort P H E L L S O R T E X A M S L E
4-sort L E E A M H L E P S O L T S X R
1-sort A E E E H L L M O P R S S T X

35

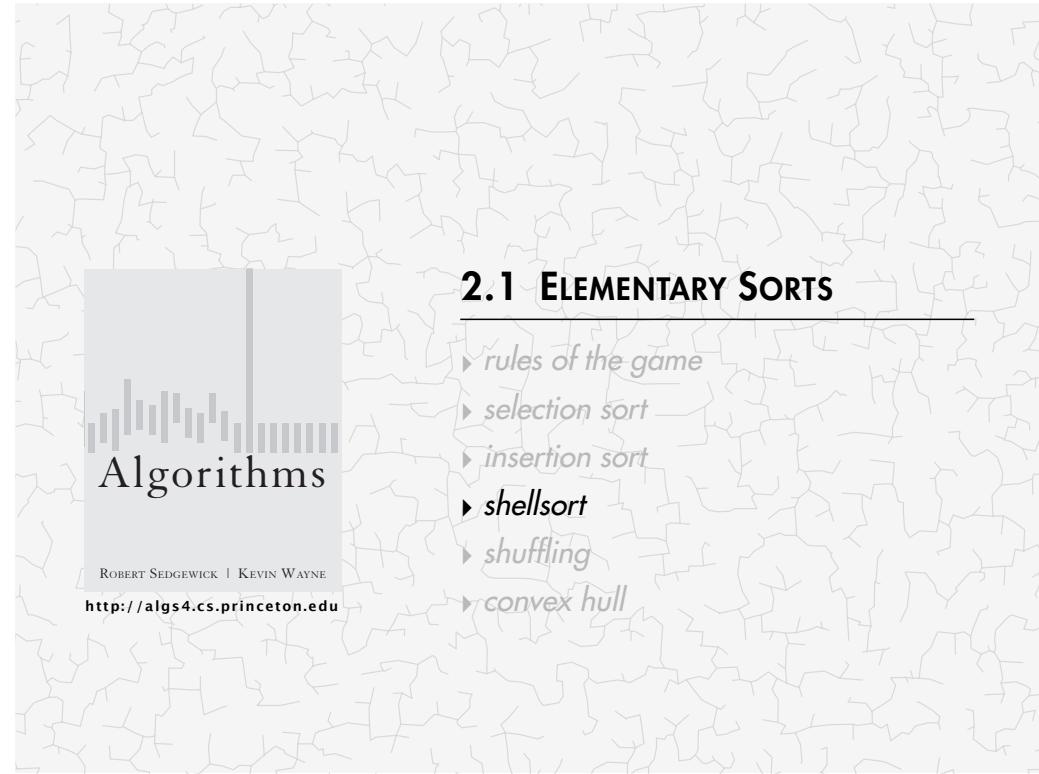

h-sorting demo

In iteration *i*, swap $a[i]$ with each larger entry *h* positions to its left.

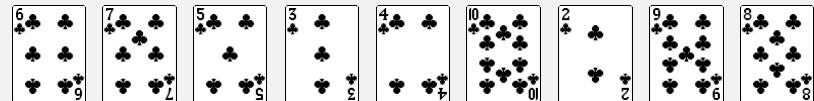

h-sorting

How to h -sort an array? Insertion sort, with stride length h .

3-sorting an array

```
M O L E E X A S P R T
E O L M E X A S P R T
E E L M O X A S P R T
E E L M O X A S P R T
A E L E O X M S P R T
A E L E O X M S P R T
A E L E O P M S X R T
A E L E O P M S X R T
A E L E O P M S X R T
A E L E O P M S X R T
```

Why insertion sort?

- Big increments \Rightarrow small subarray.
- Small increments \Rightarrow nearly in order. [stay tuned]

Shellsort example: increments 7, 3, 1

input

```
S O R T E X A M P L E
```

1-sort

```
A E L E O P M S X R T
A E L E O P M S X R T
A E E L O P M S X R T
A E E L O P M S X R T
A E E L M O P S X R T
A E E L M O P S X R T
A E E L M O P R S X T
A E E L M O P R S T X
```

7-sort

```
S O R T E X A M P L E
M O R T E X A S P L E
M O R T E X A S P L E
M O L T E X A S P R E
M O L E E X A S P R T
```

3-sort

```
M O L E E X A S P R T
E O L M E X A S P R T
E E L M O X A S P R T
A E L E O X M S P R T
A E L E O X M S P R T
A E L E O P M S X R T
A E L E O P M S X R T
A E L E O P M S X R T
```

result

```
A E E L M O P R S T X
```

37

38

Shellsort: Java implementation

```
public class Shell
{
    public static void sort(Comparable[] a)
    {
        int N = a.length;

        int h = 1;
        while (h < N/3) h = 3*h + 1; // 1, 4, 13, 40, 121, 364, ...
        ← 3x+1 increment sequence

        while (h >= 1)
        { // h-sort the array.
            for (int i = h; i < N; i++) ← insertion sort
            {
                for (int j = i; j >= h && less(a[j], a[j-h]); j -= h)
                    exch(a, j, j-h);
            }

            h = h/3; ← move to next increment
        }

        private static boolean less(Comparable v, Comparable w)
        { /* as before */ }
        private static void exch(Comparable[] a, int i, int j)
        { /* as before */ }
    }
}
```

39

Shellsort: visual trace

input



40-sorted



13-sorted



4-sorted




result



40

Shellsort: animation

50 random items

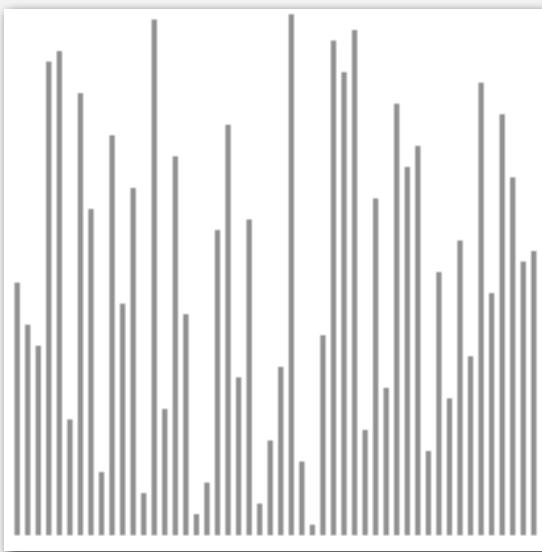


<http://www.sorting-algorithms.com/shell-sort>

41

Shellsort: animation

50 partially-sorted items

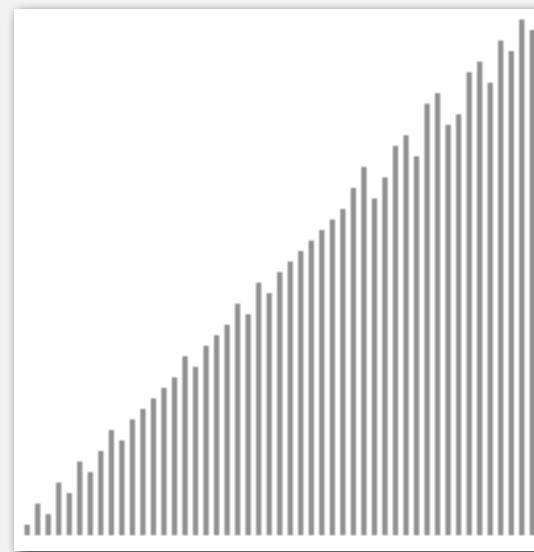

<http://www.sorting-algorithms.com/shell-sort>

42

Shellsort: which increment sequence to use?

Powers of two. 1, 2, 4, 8, 16, 32, ...

No.

Powers of two minus one. 1, 3, 7, 15, 31, 63, ...

Maybe.

→ 3x + 1. 1, 4, 13, 40, 121, 364, ...

OK. Easy to compute.

Sedgewick. 1, 5, 19, 41, 109, 209, 505, 929, 2161, 3905, ...

Good. Tough to beat in empirical studies.

merging of $(9 \times 4) - (9 \times 2) + 1$
and $4^1 - (3 \times 2) + 1$

43

Shellsort: intuition

Proposition. A g-sorted array remains g-sorted after h-sorting it.

7-sort

S	O	R	T	E	X	A	M	P	L	E
M	O	R	T	E	X	A	S	P	L	E
M	O	R	T	E	X	A	S	P	L	E
M	O	L	T	E	X	A	S	P	R	E
M	O	L	E	E	X	A	S	P	R	T

3-sort

M	O	L	E	E	X	A	S	P	R	T																																
E	O	L	M	E	X	A	S	P	R	T																																
E	E	L	M	O	X	A	S	P	R	T																																
E	E	L	M	O	X	A	S	P	R	T																																
A	E	L	E	O	X	M	S	P	R	T																																
A	E	L	E	O	P	M	S	R	T	A	E	L	E	O	P	M	S	X	R	T	A	E	L	E	O	P	M	S	X	R	T	A	E	L	E	O	P	M	S	X	R	T
A	E	L	E	O	P	M	S	X	R	T																																
A	E	L	E	O	P	M	S	X	R	T																																
A	E	L	E	O	P	M	S	X	R	T																																

still 7-sorted

Challenge. Prove this fact—it's more subtle than you'd think!

44

Shellsort: analysis

Proposition. The worst-case number of compares used by shellsort with the $3x+1$ increments is $O(N^{3/2})$.

Property. Number of compares used by shellsort with the $3x+1$ increments is at most by a small multiple of N times the # of increments used.

N	compares	$N^{1.289}$	$2.5 N \lg N$
5,000	93	58	106
10,000	209	143	230
20,000	467	349	495
40,000	1022	855	1059
80,000	2266	2089	2257

measured in thousands

Remark. Accurate model has not yet been discovered (!)

Why are we interested in shellsort?

Example of simple idea leading to substantial performance gains.

Useful in practice.

- Fast unless array size is huge (used for small subarrays).
- Tiny, fixed footprint for code (used in some embedded systems).
- Hardware sort prototype.

bzip2, /linux/kernel/groups.c

uClibc

Simple algorithm, nontrivial performance, interesting questions.

- Asymptotic growth rate?
- Best sequence of increments? ← open problem: find a better increment sequence
- Average-case performance?

Lesson. Some good algorithms are still waiting discovery.

45

46

2.1 ELEMENTARY SORTS

- ▶ rules of the game
- ▶ selection sort
- ▶ insertion sort
- ▶ shellsort
- ▶ shuffling
- ▶ convex hull


Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

How to shuffle an array


Goal. Rearrange array so that result is a uniformly random permutation.

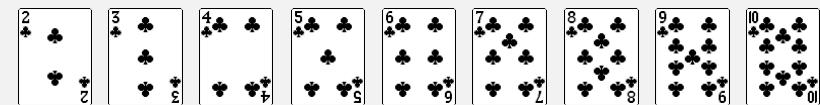

48

How to shuffle an array

Goal. Rearrange array so that result is a uniformly random permutation.

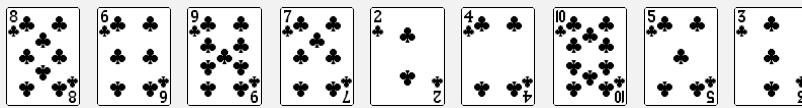


49

Shuffle sort

- Generate a random real number for each array entry.
- Sort the array.

useful for shuffling columns in a spreadsheet

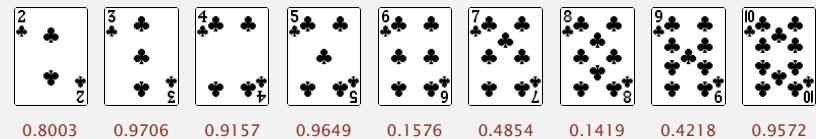


50

Shuffle sort

- Generate a random real number for each array entry.
- Sort the array.

useful for shuffling columns in a spreadsheet

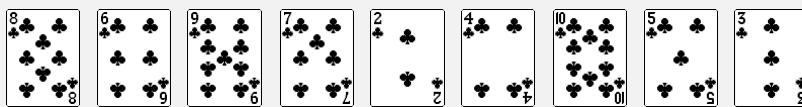


51

Shuffle sort

- Generate a random real number for each array entry.
- Sort the array.

useful for shuffling columns in a spreadsheet

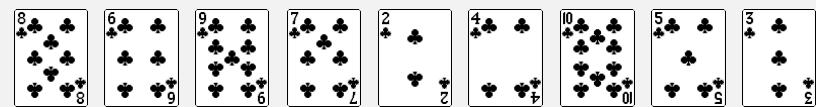

Proposition. Shuffle sort produces a uniformly random permutation of the input array, provided no duplicate values.


assuming real numbers uniformly at random

52

War story (Microsoft)


[Microsoft antitrust probe by EU.](#) Microsoft agreed to provide a randomized ballot screen for users to select browser in Windows 7.

<http://www.browserchoice.eu>

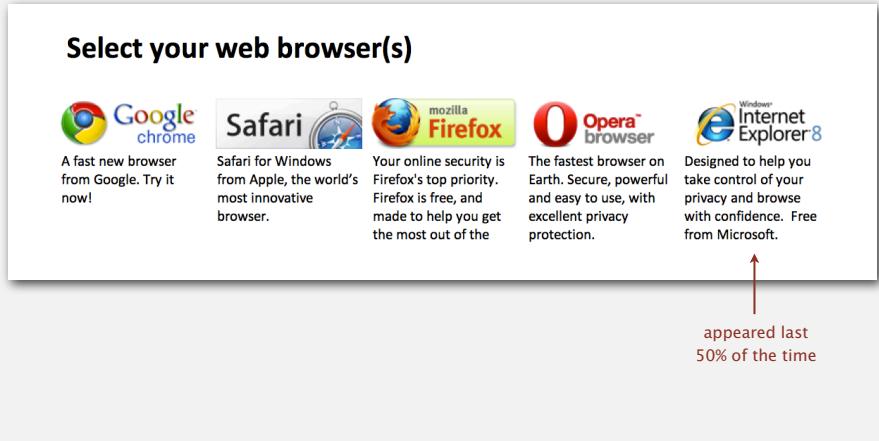

Knuth shuffle demo

- In iteration i , pick integer r between 0 and i uniformly at random.
- Swap $a[i]$ and $a[r]$.

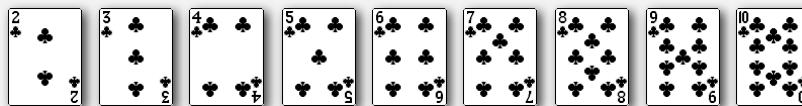

55

War story (Microsoft)

[Microsoft antitrust probe by EU.](#) Microsoft agreed to provide a randomized ballot screen for users to select browser in Windows 7.

[Solution?](#) Implement shuffle sort by making comparator always return a random answer.


```
public int compareTo(Browser that)
{
    double r = Math.random();
    if (r < 0.5) return -1;
    if (r > 0.5) return +1;
    return 0;
}
```

← browser comparator
(should implement a total order)

54

Knuth shuffle

- In iteration i , pick integer r between 0 and i uniformly at random.
- Swap $a[i]$ and $a[r]$.

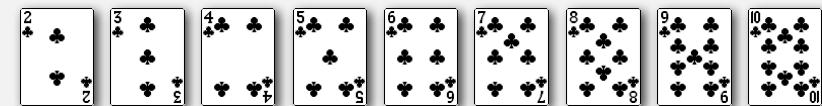

[Proposition.](#) [Fisher-Yates 1938] Knuth shuffling algorithm produces a uniformly random permutation of the input array in linear time.

→ assuming integers
uniformly at random

56

Knuth shuffle

- In iteration i , pick integer r between 0 and i uniformly at random.
- Swap $a[i]$ and $a[r]$.

common bug: between 0 and $N - 1$
correct variant: between i and $N - 1$

```
public class StdRandom
{
    ...
    public static void shuffle(Object[] a)
    {
        int N = a.length;
        for (int i = 0; i < N; i++)
        {
            int r = StdRandom.uniform(i + 1);      ← between 0 and i
            exch(a, i, r);
        }
    }
}
```

57

War story (online poker)

Texas hold'em poker. Software must shuffle electronic cards.



How We Learned to Cheat at Online Poker: A Study in Software Security

<http://www.datamation.com/entdev/article.php/616221>

58

War story (online poker)

Shuffling algorithm in FAQ at www.planetpoker.com

```
for i := 1 to 52 do begin
    r := random(51) + 1;      ← between 1 and 51
    swap := card[r];
    card[r] := card[i];
    card[i] := swap;
end;
```

Bug 1. Random number r never 52 \Rightarrow 52nd card can't end up in 52nd place.

Bug 2. Shuffle not uniform (should be between 1 and i).

Bug 3. `random()` uses 32-bit seed $\Rightarrow 2^{32}$ possible shuffles.

Bug 4. Seed = milliseconds since midnight \Rightarrow 86.4 million shuffles.

“The generation of random numbers is too important to be left to chance.”

— Robert R. Coveyou

59

War story (online poker)

Best practices for shuffling (if your business depends on it).

- Use a hardware random-number generator that has passed both the FIPS 140-2 and the NIST statistical test suites.
- Continuously monitor statistic properties: hardware random-number generators are fragile and fail silently.
- Use an unbiased shuffling algorithm.



Bottom line. Shuffling a deck of cards is hard!

60



ROBERT SEDGWICK | KEVIN WAYNE


<http://algs4.cs.princeton.edu>

2.1 ELEMENTARY SORTS

- ▶ *rules of the game*
- ▶ *selection sort*
- ▶ *insertion sort*
- ▶ *shellsort*
- ▶ *shuffling*
- ▶ **convex hull**

Convex hull


The **convex hull** of a set of N points is the smallest perimeter fence enclosing the points.

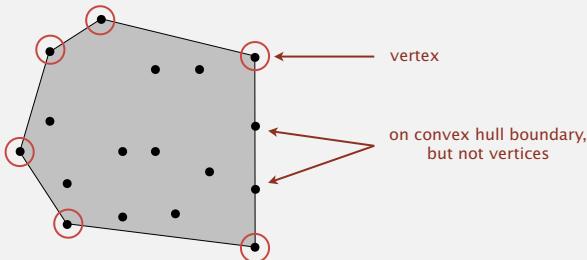

Convex hull output. Sequence of vertices in counterclockwise order.

Convex hull

The **convex hull** of a set of N points is the smallest perimeter fence enclosing the points.

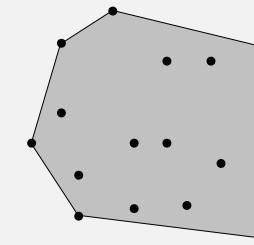


Equivalent definitions.

- Smallest convex set containing all the points.
- Smallest area convex polygon enclosing the points.
- Convex polygon enclosing the points, whose vertices are points in set.

62

Convex hull: mechanical algorithm


Mechanical algorithm. Hammer nails perpendicular to plane; stretch elastic rubber band around points.

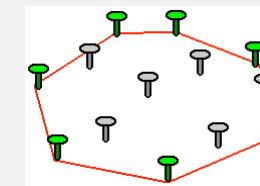

http://www.idlcoyote.com/math_tips/convexhull.html

Convex hull application: motion planning

Robot motion planning. Find shortest path in the plane from s to t that avoids a polygonal obstacle.

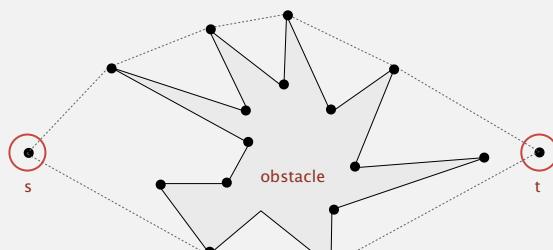


Fact. Shortest path is either straight line from s to t or it is one of two polygonal chains of convex hull.

65

Convex hull: geometric properties

Fact. Can traverse the convex hull by making only counterclockwise turns.


Fact. The vertices of convex hull appear in increasing order of polar angle with respect to point p with lowest y -coordinate.

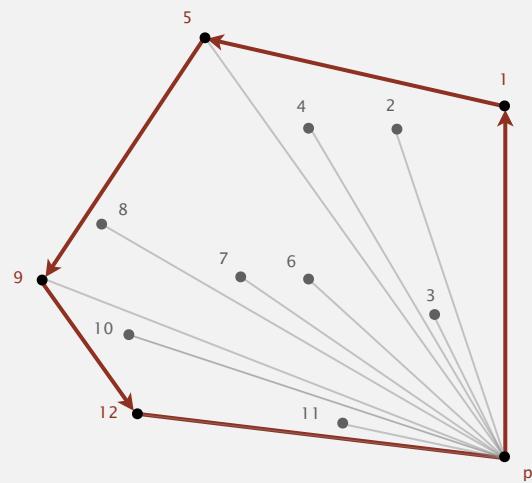

67

Convex hull application: farthest pair

Farthest pair problem. Given N points in the plane, find a pair of points with the largest Euclidean distance between them.

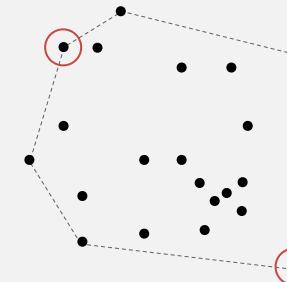


Fact. Farthest pair of points are extreme points on convex hull.

66

Graham scan demo


- Choose point p with smallest y -coordinate.
- Sort points by polar angle with p .
- Consider points in order; discard unless it creates a ccw turn.



68

Graham scan demo

- Choose point p with smallest y -coordinate.
- Sort points by polar angle with p .
- Consider points in order; discard unless it creates a ccw turn.

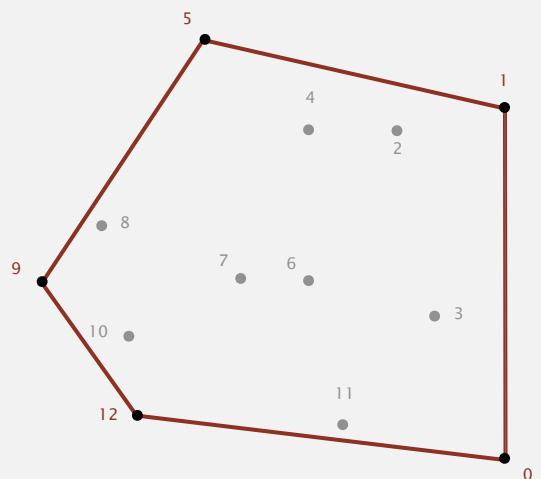


69

Implementing ccw

CCW. Given three points a , b , and c , is $a \rightarrow b \rightarrow c$ a counterclockwise turn?

is c to the left of the ray $a \rightarrow b$

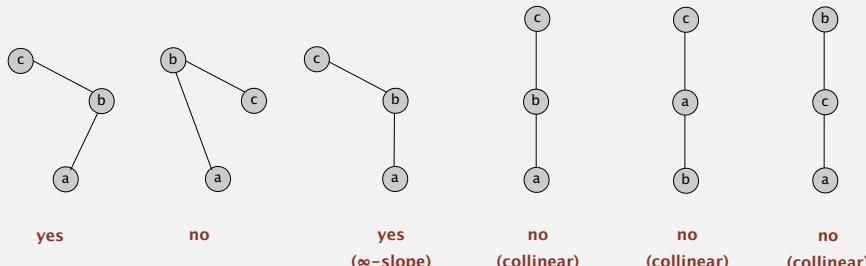

Lesson. Geometric primitives are tricky to implement.

- Dealing with degenerate cases.
- Coping with floating-point precision.

Graham scan: implementation challenges

- How to find point p with smallest y -coordinate?
 - Define a total order, comparing by y -coordinate. [next lecture]
- How to sort points by polar angle with respect to p ?
 - Define a total order for each point p . [next lecture]
- How to determine whether $p_1 \rightarrow p_2 \rightarrow p_3$ is a counterclockwise turn?
 - Computational geometry. [next two slides]
- How to sort efficiently?
 - Mergesort sorts in $N \log N$ time. [next lecture]
- How to handle degeneracies (three or more points on a line)?
 - Requires some care, but not hard. [see booksite]

70

Implementing ccw


CCW. Given three points a , b , and c , is $a \rightarrow b \rightarrow c$ a counterclockwise turn?

- Determinant (or cross product) gives 2x signed area of planar triangle.

$$2 \times \text{Area}(a, b, c) = \begin{vmatrix} a_x & a_y & 1 \\ b_x & b_y & 1 \\ c_x & c_y & 1 \end{vmatrix} = (b_x - a_x)(c_y - a_y) - (b_y - a_y)(c_x - a_x)$$

$$(b - a) \times (c - a)$$

- If signed area > 0 , then $a \rightarrow b \rightarrow c$ is counterclockwise.
- If signed area < 0 , then $a \rightarrow b \rightarrow c$ is clockwise.
- If signed area $= 0$, then $a \rightarrow b \rightarrow c$ are collinear.

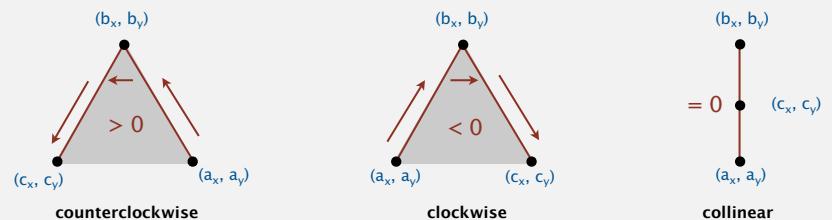

71

72

Immutable point data type

```
public class Point2D
{
    private final double x;
    private final double y;

    public Point2D(double x, double y)
    {
        this.x = x;
        this.y = y;
    }

    ...

    public static int ccw(Point2D a, Point2D b, Point2D c)
    {
        double area2 = (b.x-a.x)*(c.y-a.y) - (b.y-a.y)*(c.x-a.x);
        if      (area2 < 0) return -1; // clockwise
        else if (area2 > 0) return +1; // counter-clockwise
        else                  return 0; // collinear
    }
}
```

danger of
floating-point
roundoff error