CS 126 Lecture P6: Recursion

Why Learn Recursion?

- Master a powerful programming tool
- Gain insight of how programs (function calls) work

Outline

- **What is recursion?**
- How does it work?
- Examples

COS 126 Lecture P6: Recursion

Recursive program: one that calls itself

MATHEMATICAL INDUCTION:

- To prove S(N)
  - * prove S(0)
  - * prove S(N), assuming S(k) for all k<N

Ex: "triangle numbers"

$0 + 1 + 2 + 3 + \ldots + N = N(N+1)/2$

- * trivially true for N = 0
- * $0 + 1 + 2 + 3 + \ldots + N$
  $= 0 + 1 + 2 + \ldots + N-1 + N$
  $= (N-1)N/2 + N = N(N+1)/2$

RECURSION:

- To compute f(N)
  - * compute f(0)
  - * compute f(N), using f(k) for k<N

Ex: triangle numbers

```
int tri(int N)
   {
      if (N == 0) return 0;
      return N + tri(N-1);
   }
```

Number conversion

- To convert an integer N to binary:
  - stop if N is 0
  - write "1" if N odd, "0" if N even
  - move left one position
  - convert N/2

Ex:

42	0
21	10
10	010
5	1010
2	01010
1	101010

check:

5	4	3	2	1	0
1	0	1	0	1	0

$$2^5 + 2^3 + 2^1$$

$$32 + 8 + 2 = 42$$

- Easiest way to convert to binary by hand
- Corresponds directly to a recursive program

Recursive number conversion

- Computer prints from left to right
  - need to convert N/2, then print right bit

```
void convert(int N)
   {
      if (N/2 > 0) convert(N/2);
      printf("%c", '0'+ N % 2);
   }
```

Proof of correctness: N = 2*(N / 2) + (N % 2)

```
convert(42)
   convert(21)
      convert(10)
         convert(5)
            convert(2)
               convert(1)
                  printf("1")
               printf("0")
            printf("1")
         printf("0")
      printf("1")
   printf("0")
```

Indentation level denotes statements belonging to same "invocation"

1 0 1 0 1 0

↳ 101010 = 42

- Works to convert to any base
  (change "2" to "b" everywhere in code)

Demo `convert()`

Outline

- ~~What is recursion?~~
- **How does it work?**
- Examples

Function "Environment"

- When a function executes, it lives in an "environment"
- What's an "environment"?
  - Value of local variables (scratch space)
  - Which statement the computer is executing currently

Implementing Recursion

Any function call requires system to
- set the values of the parameters
- save the "environment"
- jump to the first instruction in the function
  execute the function
- restore the "environment"
- continue at the instruction after the call
  "return address" (part of environment)

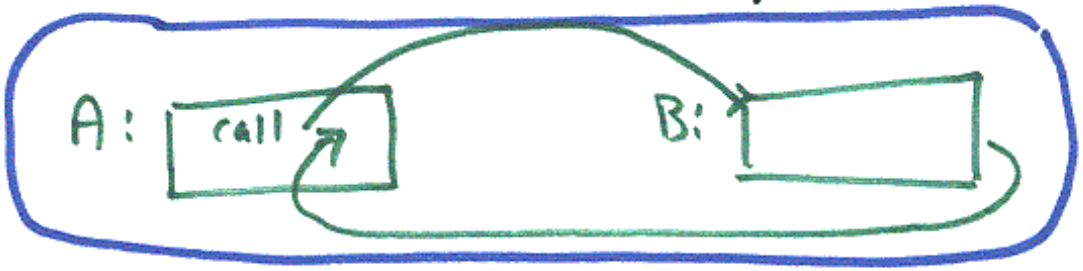

- Use pushdown stack for save/restore
  call: push environment
  return: restore environment from stack

Demo Use of Stacks to Implement Function Calls

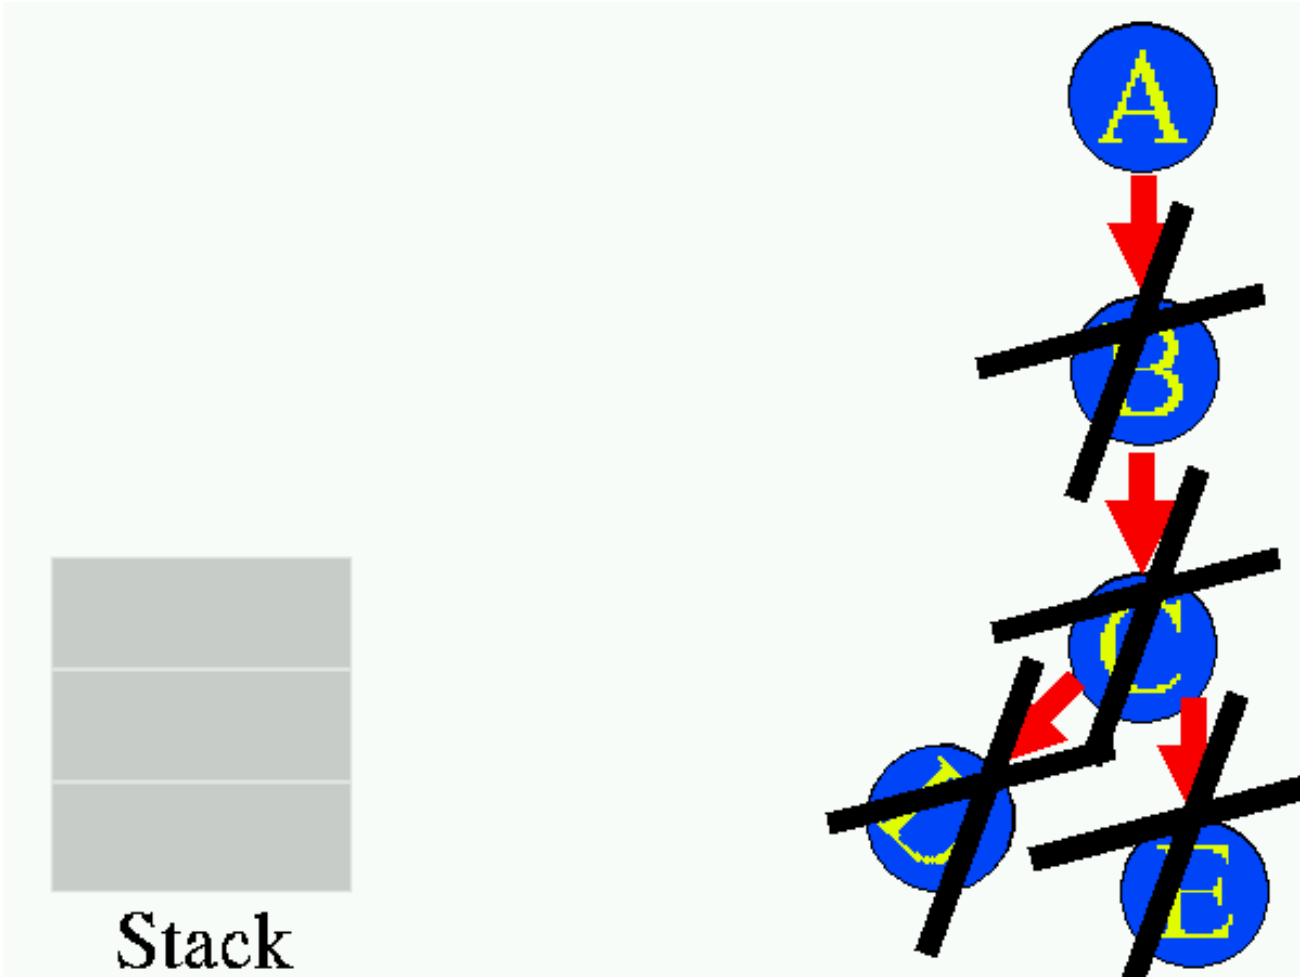

Stack details for number conversion

- "Environment" is value of N
  - function call: push N to stack
  - return: pop stack to N

```
.                                        N   stack contents
.convert(42)
.  convert(21)                                42
.    convert(10)                             42  21
.      convert(5)                            42  21  10
.        convert(2)                          42  21  10  5
.          convert(1)                        42  21  10  5  2
.            printf("1")                1
.            [return for 1]           2     42  21  10  5
.          printf("0")
.          [return for 2]             5     42  21  10
.        printf("1")
.        [return for 5]                10    42  21
.      printf("0")
.      [return for 10]                 21    42
.    printf("1")
.    [return for 21]                   42
.  printf("0")
.  [return for 42]
```

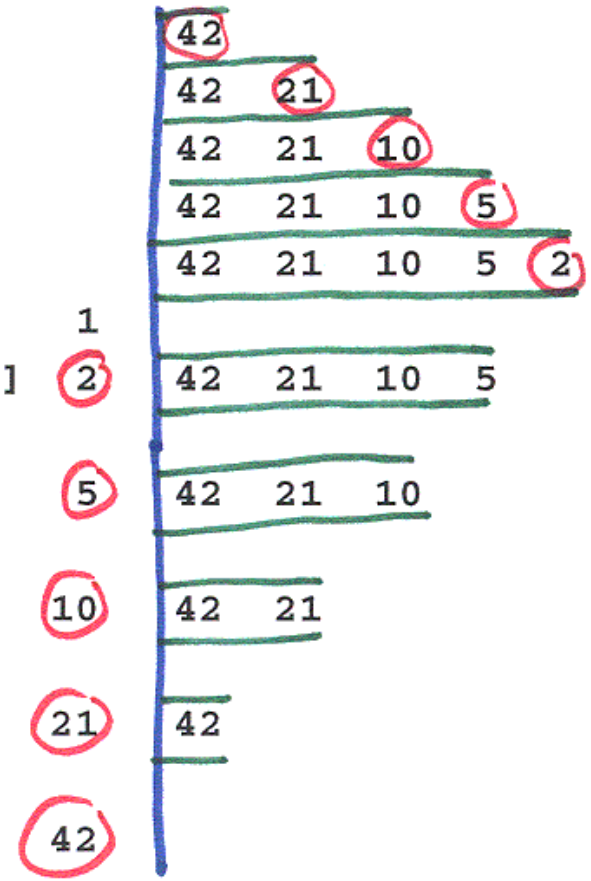

popped from stack

Removing Recursion

```
{
   base case;
   some code;
   recursion;
   more code;
}
```

```
{
   repeat {
      some code;
      push environment;
   }
   base case;
   repeat {
      pop environment;
      more code;
   }
}
```

- We can remove recursion from any function by using an explicit stack
- Helps us understand nature of the computation (no other reason to do so)

Removing Recursion

```
{
   base case;
   some code;
   recursion;
   more code;
}
```

```
{
   repeat {
      some code;
      push environment;
   }
   base case;
   repeat {
      pop environment;
      more code;
   }
}
```

Ex: number conversion

```
void convert(int N)
   {
      STACKinit();
      while (N > 0) { STACKpush(N); N = N/2; }
      while (!STACKempty())
         printf("%c", '0'+ STACKpop() % 2);
   }
```

Tail Recursion

```
int tri(int N)
   {
      if (N == 0) return 0;
      return N + tri(N-1);
   }
```

```
int tri(int N)
   { int t;
      for (t = 0; N > 0; N++) t += N;
      return t;
   }
```

- If single recursive call is the last action, don't need a stack
- Why?
  - nothing to do after recursion => no need to remember stuff => no need for stack

Possible Pitfall with Recursion

Simple recursive programs
can consume excessive resources

Ex: Compute binomial coefficients

```
int f(int N, int k)
   {
      if ((k < 0) || (k > N)) return 0;
      if (N == 0) return 1;
      return f(N-1, k) + f(N-1, k-1);
   }
```

- Seems to run for a long time to compute f(30, 15).

Q: Why?

A: Recomputes intermediate results

Possible Pitfall with Recursion

- Simpler example: hard way to compute 2^N

```
int f(int N)
   {
      if (N == 0) return 1;
      return f(N-1)+f(N-1);
   }
```

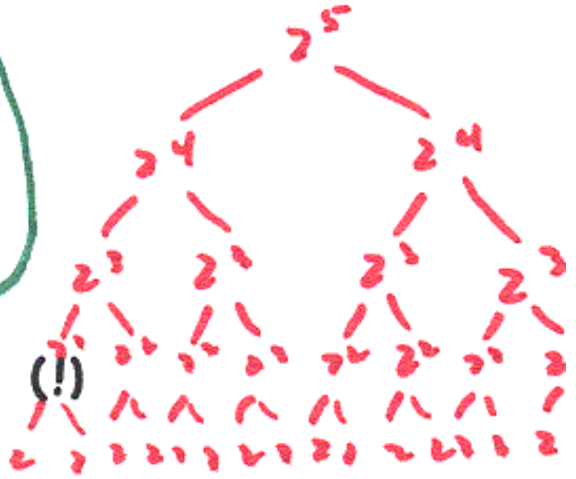

Takes time proportional to 2^N (!)

- DO NOT use these programs!

  Solution: DYNAMIC PROGRAMMING

  save away intermediate results

  see Sedgewick, section 5.2

P6.9

Outline

- ~~What is recursion?~~
- ~~How does it work?~~
- **Examples**

Divide-and-Conquer

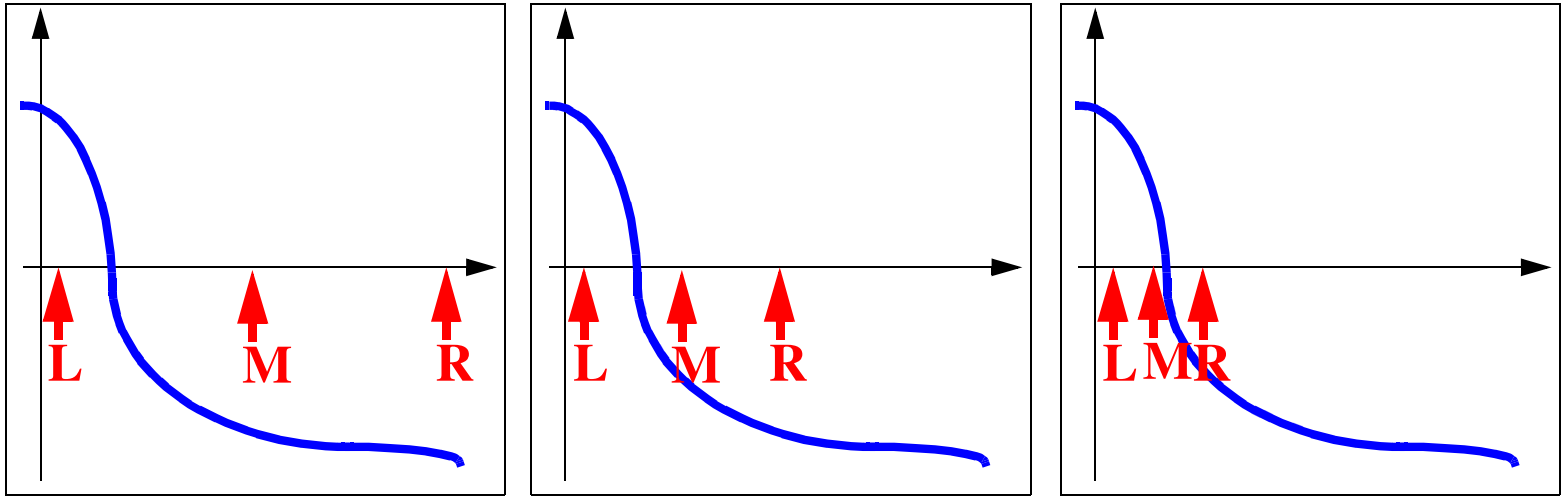

Many computations are
naturally expressed as recursive programs

ITERATION
another way to write "for" loop

"DIVIDE and CONQUER"
solve a problem by dividing into smaller ones

Ex: root finding via "bisection"

Finding Root via Bisection

```
float bisectr(float l, float r)
   {
      float m;
      m = (l + r) / 2;
      if ((r - l) < epsilon) return m;
      if (f(m) > 0.0)
         return bisectr(m, r);
      else
         return bisectr(l, m);
   }
```

Bisection for Integer Functions

```
int bisectr(int l, int r)
   {
      int m;
      m = (l + r) / 2;
      if (f(m) == 0) return m;
      if (r <= l) return -1;
      if (f(m) > 0)
         return bisectr(m+1, r);
      else
         return bisectr(l, m-1);
   }
```

Binary Search

Suppose an array A has N integers, in order

x	0	1	2	3	4	5	6	7	8	9	10	11	12
f(x)	1	1	2	5	8	13	21	34	55	89	144	233	377

SEARCH PROBLEM: is a given integer v in A?

- Observations:
  - An array is a function mapping integer indices to contents
  - A sorted array is a monotonically increasing function

SOLUTION: use above program with

```
int f(int k) { return  v - a[k]; }
```

Ex: v = 144

l	r	m	f(m)
0	12	6	+
7	12	9	+
10	12	11	-
10	10	10	0

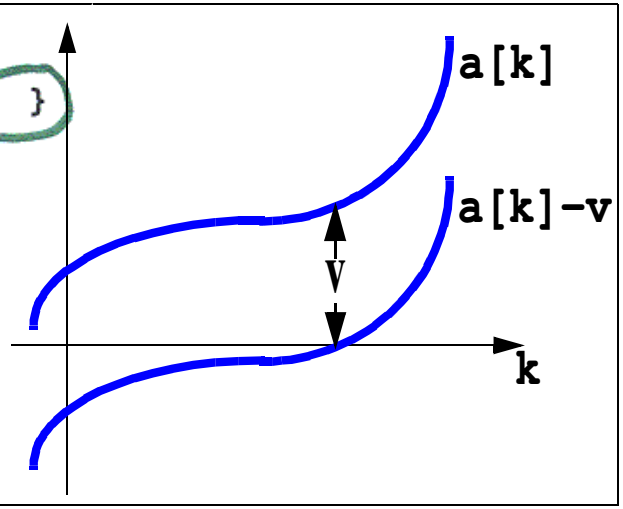

Traveling Salesman Problem

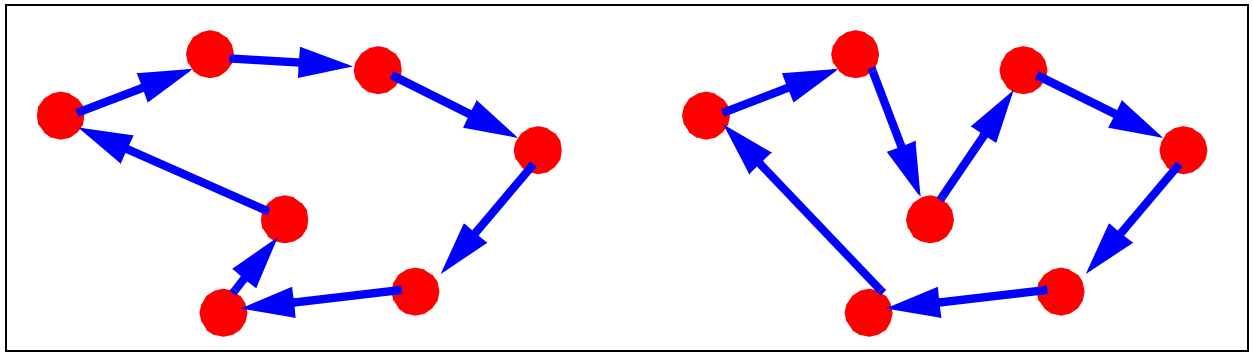

Given a set of points, find the shortest tour connecting all the points

- Recursive solution for trying all possibilities

Traveling Salesman Problem

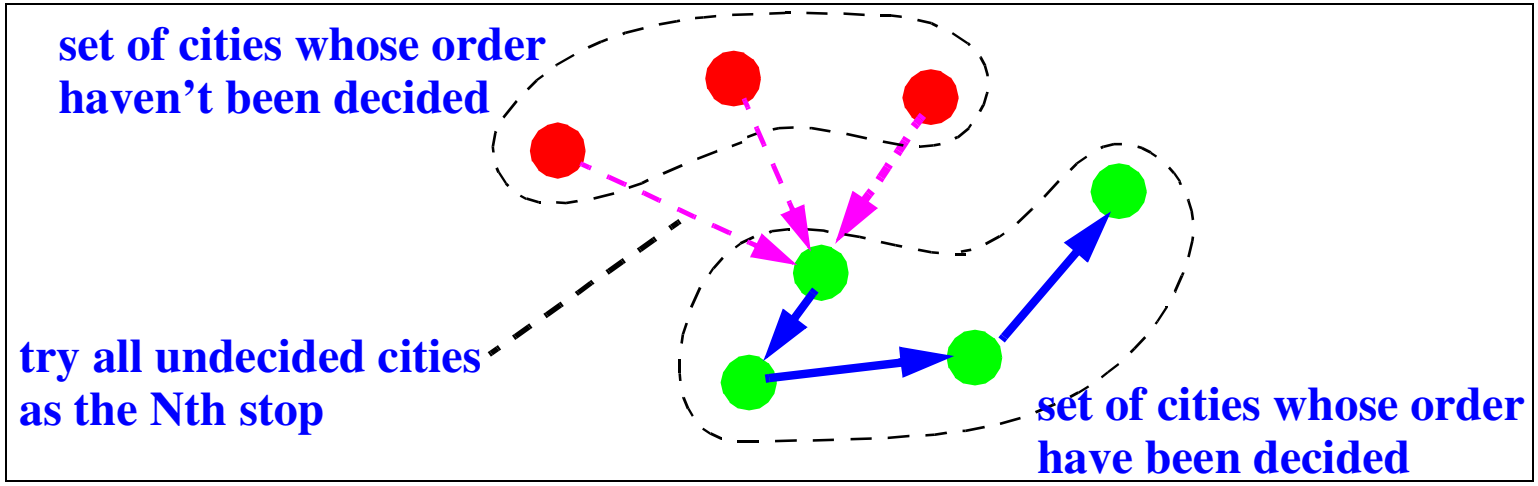

- Recursive solution for trying all possibilities

```
visit(int N)
    {
        int i;
        if ( N == 1) { checklength(); return; }
        for (i = 1; i <= N; i++)
            {
                swap(i, N);
                visit(N-1);
                swap(i, N);
            }
    }
```

Number of nodes whose positions have not been decided

Visit ith city as the last (Nth) step

Decide the positions of the other undecided cities

Traveling Salesman Problem

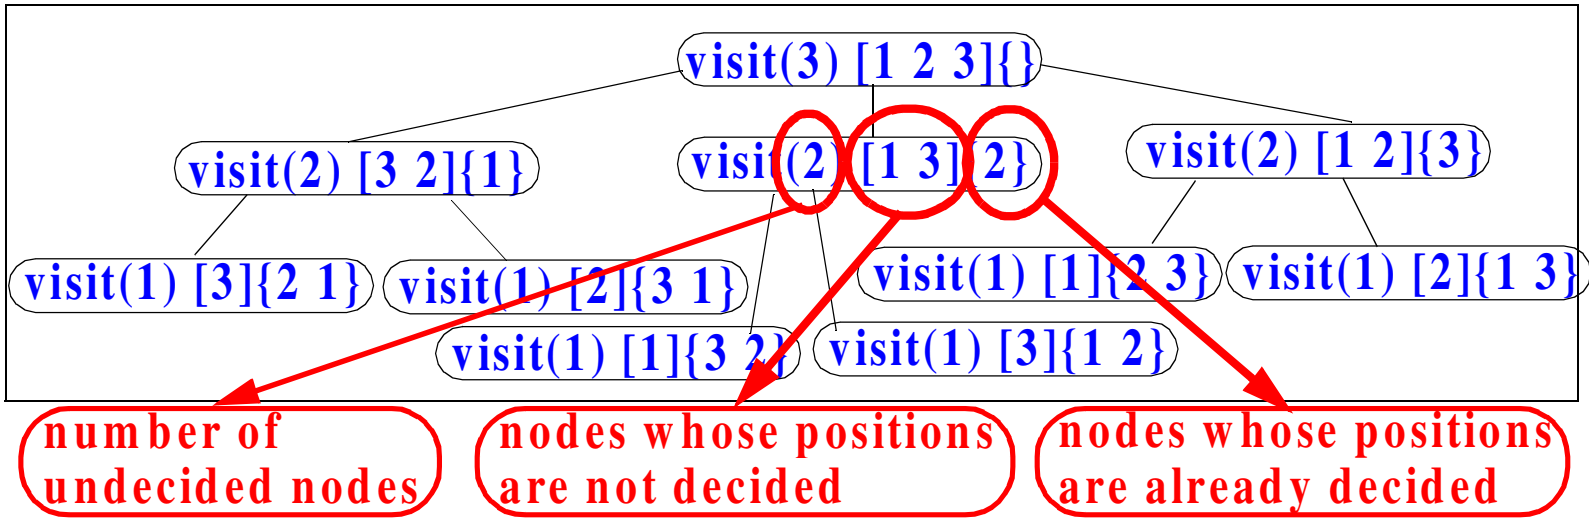

- Takes N! steps

- Can't run for very large N
  no computer can ever run this
  to completion for N = 100 [100! > 10^150]

  [stay tuned]

Recursion: Dragon Curve

Fold a strip of paper in half n times
unfold to right angles

n = 0

n = 1

n = 2

n = 3

n = 4

n = 12

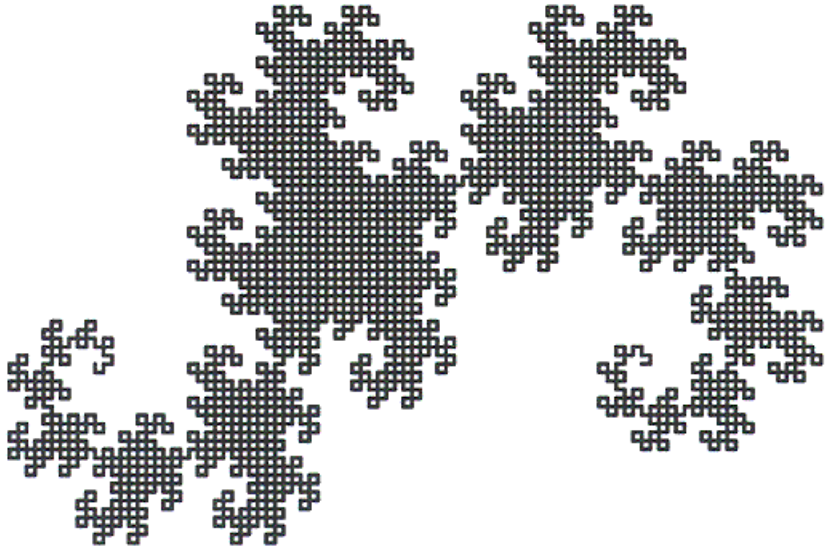

Drawing a Dragon Curve

Use simplest turtle graphics

F: move forward one step (pen down)

L: turn left

R: turn right

n = 0

F

n = 1

F L F

n = 2

F L F L F R F

L L R

n = 3

F L F L F R F L F L F R F R F

L L R L L R R

n = 4

L L R L L R R L L L R R L R R

Intuition of Algorithm

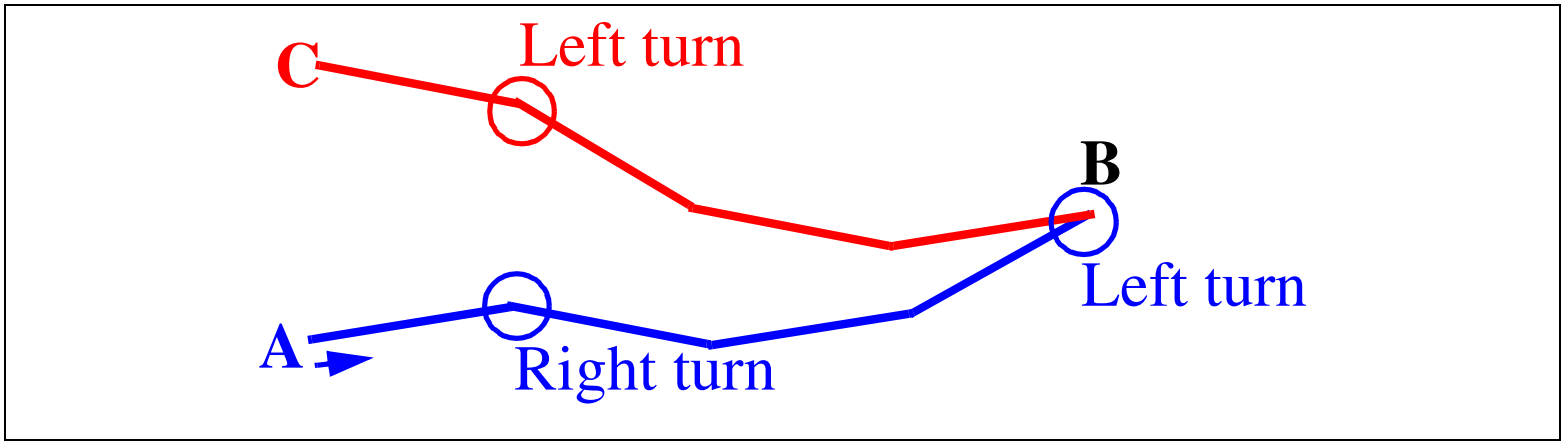

- $\overline{AB}$ is a smaller dragon curve by itself
- $\overline{CB}$ = $\overline{AB}$
- Therefore $\overline{BC}$ is the reverse of $\overline{AB}$
- Therefore every turn along $\overline{BC}$ is the opposite of the corresponding turn on $\overline{AB}$

Recursive Program for Dragon Curve

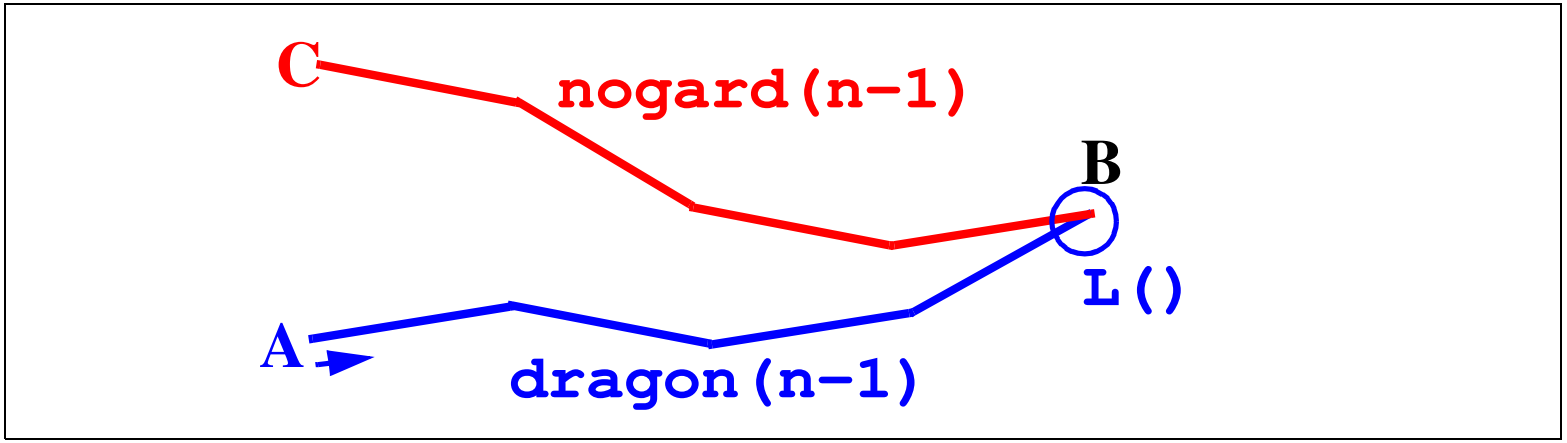


```
dragon(int n)
{
   if (n == 0) { F(); return; }
   dragon(n-1);
   L();
   nogard(n-1);
}
```

Backwards Dragon Curve

```
dragon(int n)
{
   if (n == 0) { F(); return; }
   dragon(n-1);
   L();
   nogard(n-1);
}
```

```
nogard(int n)
{
   if (n == 0) { F(); return; }
   dragon(n-1);
   R();
   nogard(n-1);
}
```

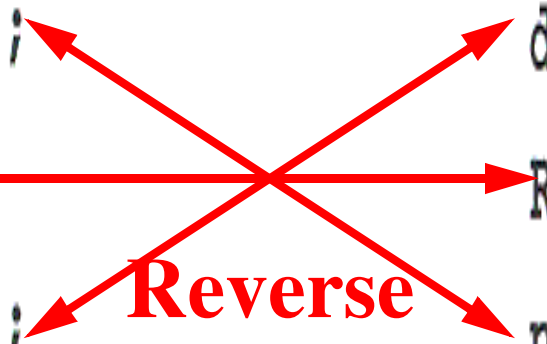

dragon Demo

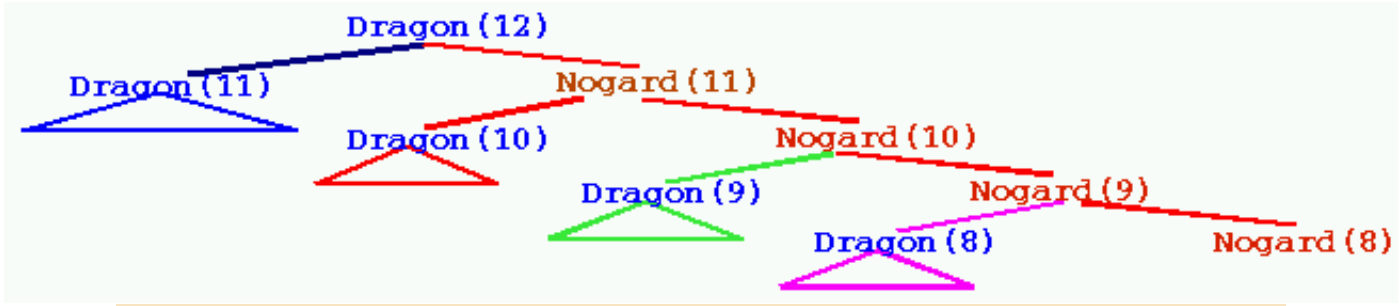
Dragon(12)
Dragon(11)
Nogard(11)
Dragon(10)
Nogard(10)
Dragon(9)
Nogard(9)
Dragon(8)
Nogard(8)

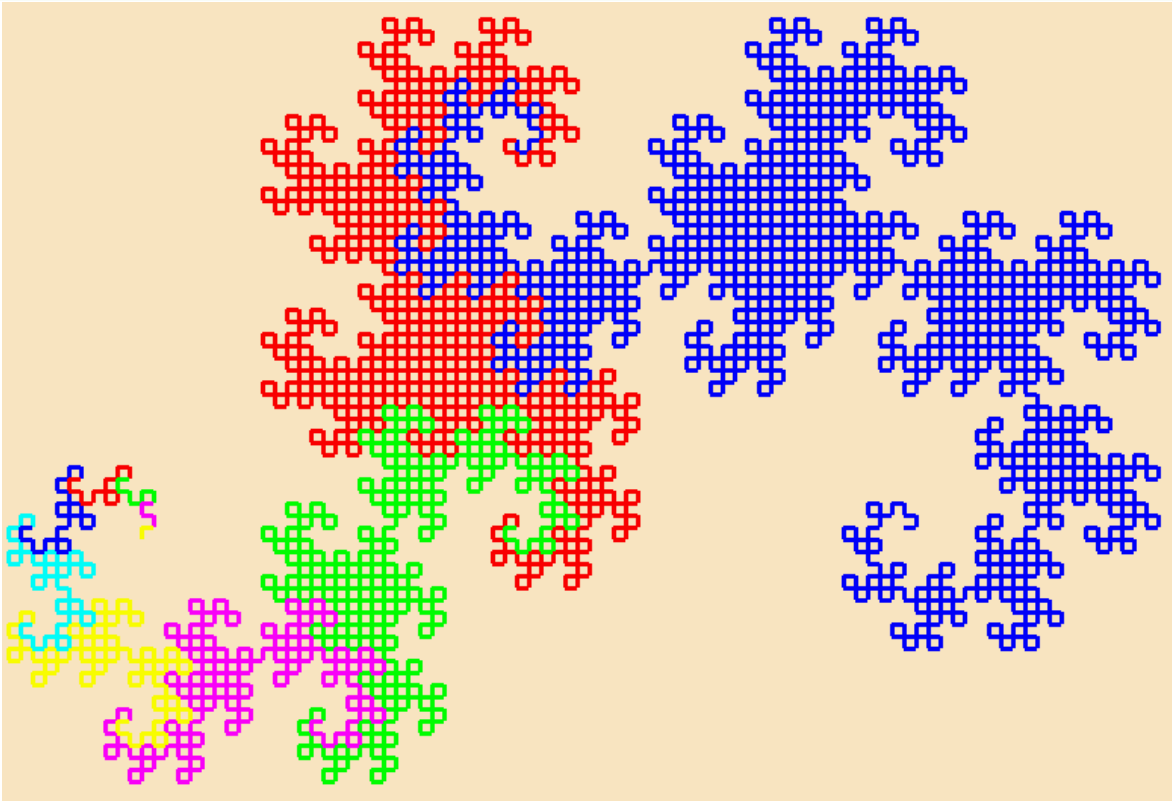

Alternate "dragon"

- Replace call to "nogard" by nonrecursive version

```
dragon(int n)
{
   int k;
   if (n == 0)  { F(); return; }
   dragon(n-1);
   L();
   for (k = n-2; k >= 0; k--)
      {
         dragon(k);
         R();
      }
   F();
}
```

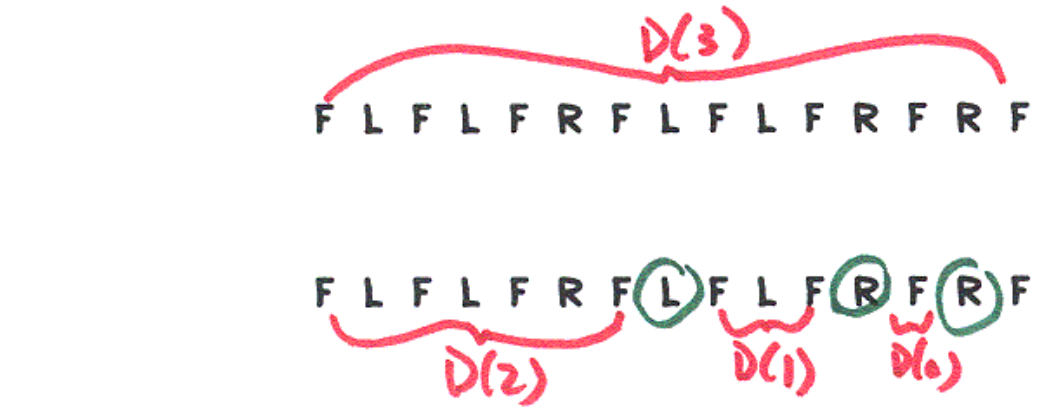

- Points out self-similarities in curve

PostScript dragon curve

- Easy to implement because of built-in
  - turtle graphics
  - stack (dup repliates stack top)
- Passing args to recursive functions is tricky

all arguments and "scratch variables" are on the stack!

```
/L { 90 rotate } def
/R { 90 neg rotate } def
/F { 2 0 rlineto } def
/dragon
   { dup 0 eq
        { F pop }
        { 1 sub dup dragon L nogard }
     ifelse
   } def
/nogard
   { dup 0 eq
        { F pop }
        { 1 sub dup dragon R nogard }
     ifelse
   } def
200 400 moveto
15 dragon
stroke
showpage
```

replicates top before popping for comparison

pushes two copies of (n-1) for the two recursive calls

CAUTION:

2^N line segments in curve of order N

Nonrecursive dragon curve

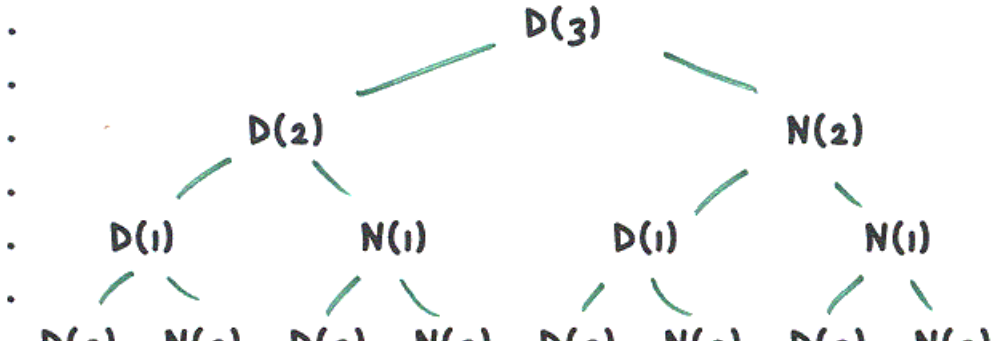

F L F L F R F L F L F R F R F

To write down the whole dragon curve sequence
- * first, put "F" in every other space
- * put "L", "R" (alternating)
  in every other remaining space
- * continue until done

F F F F F F F F
F L F F R F F L F F R F
F L F L F R F F L F R F R F
F L F L F R F L F L F R F R F

- Like Towers of Hanoi (see Sedgewick, section 5.2)
  requires too much storage (how much?)
  "ruler function" connects to binary numbers
  Details? [challenge for the bored]

step i: 1: if the bit to the left of the

What We Have Learned

- How recursion works
  - A recursive call is no different from a “regular” call
  - It involves saving the old environment for later return
- Learn to trace the execution of given recursive programs (using pictures)
- Learn to write simple recursion
  - What’s the base case?
  - What’s the induction case?