

Modeling Transformations

Adam Finkelstein
Princeton University
COS 426, Spring 2003

Modeling Transformations

- Specify transformations for objects
 - Allows definitions of objects in own coordinate systems
 - Allows use of object definition multiple times in a scene




H&B Figure 109


Overview

- 2D Transformations
 - Basic 2D transformations
 - Matrix representation
 - Matrix composition
- 3D Transformations
 - Basic 3D transformations
 - Same as 2D
- Transformation Hierarchies
 - Scene graphs
 - Ray casting


2D Modeling Transformations

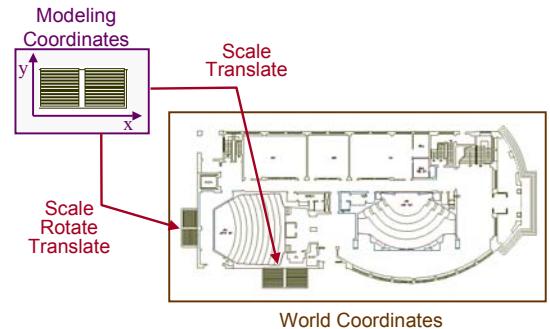

2D Modeling Transformations

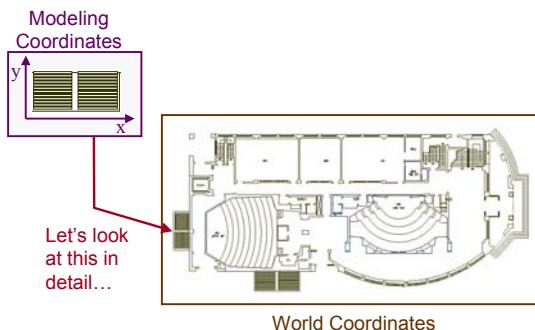


2D Modeling Transformations

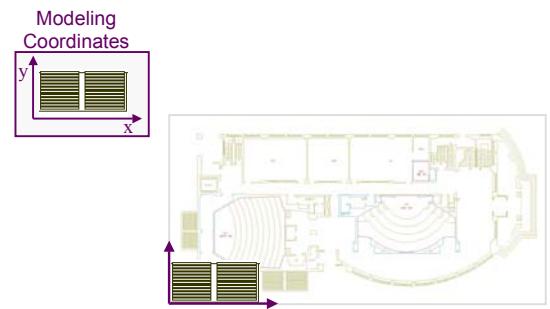

2D Modeling Transformations



Modeling
Coordinates




Scale .3, .3




2D Modeling Transformations



Modeling
Coordinates



Scale .3, .3
Rotate -90

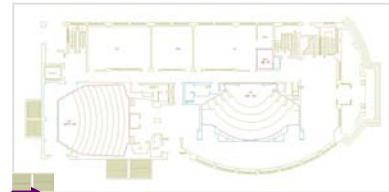


2D Modeling Transformations



Modeling
Coordinates



Scale .3, .3
Rotate -90
Translate 5, 3

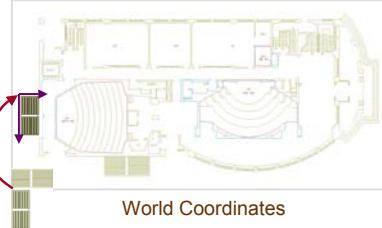

World Coordinates

Basic 2D Transformations



- Translation:

- $x' = x + tx$
- $y' = y + ty$

- Scale:


- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

- Rotation:

- $x' = x*\cos\theta - y*\sin\theta$
- $y' = x*\sin\theta + y*\cos\theta$



Transformations
can be combined
(with simple algebra)

Basic 2D Transformations



- Translation:

- $x' = x + tx$
- $y' = y + ty$

- Scale:


- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

- Rotation:

- $x' = x*\cos\theta - y*\sin\theta$
- $y' = x*\sin\theta + y*\cos\theta$



Basic 2D Transformations



- Translation:

- $x' = x + tx$
- $y' = y + ty$

- Scale:


- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

- Rotation:

- $x' = x*\cos\theta - y*\sin\theta$
- $y' = x*\sin\theta + y*\cos\theta$




$$\begin{aligned}x' &= x*sx \\y' &= y*sy\end{aligned}$$

Basic 2D Transformations

- Translation:

- $x' = x + tx$
- $y' = y + ty$



- Scale:

- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

- Rotation:

- $x' = x*\cos\theta - y*\sin\theta$
- $y' = x*\sin\theta + y*\cos\theta$

$$x' = (x*sx)*\cos\theta - (y*sy)*\sin\theta$$

$$y' = (x*sx)*\sin\theta + (y*sy)*\cos\theta$$

Basic 2D Transformations

- Translation:

- $x' = x + tx$
- $y' = y + ty$

- Scale:


- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

- Rotation:


- $x' = x*\cos\theta - y*\sin\theta$
- $y' = x*\sin\theta + y*\cos\theta$



Basic 2D Transformations

- Translation:

- $x' = x + tx$
- $y' = y + ty$



- Scale:

- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

$$x' = ((x*sx)*\cos\theta - (y*sy)*\sin\theta) + tx$$

$$y' = ((x*sx)*\sin\theta + (y*sy)*\cos\theta) + ty$$

- Rotation:

- $x' = x*\cos\theta - y*\sin\theta$
- $y' = x*\sin\theta + y*\cos\theta$

Overview

- 2D Transformations

- Basic 2D transformations
- Matrix representation
- Matrix composition

- 3D Transformations

- Basic 3D transformations
- Same as 2D

- Transformation Hierarchies

- Scene graphs
- Ray casting

Matrix Representation

- Represent 2D transformation by a matrix

$$\begin{bmatrix} a & b \\ c & d \end{bmatrix}$$

- Multiply matrix by column vector
⇒ apply transformation to point

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ c & d \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

$$\begin{aligned} x' &= ax + by \\ y' &= cx + dy \end{aligned}$$

Matrix Representation

- Transformations combined by multiplication

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ c & d \end{bmatrix} \begin{bmatrix} e & f \\ g & h \end{bmatrix} \begin{bmatrix} i & j \\ k & l \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

Matrices are a convenient and efficient way to represent a sequence of transformations!

2x2 Matrices

- What types of transformations can be represented with a 2x2 matrix?

2D Identity?

$$\begin{aligned} x' &= x \\ y' &= y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

2D Scale around (0,0)?

$$\begin{aligned} x' &= sx^*x \\ y' &= sy^*y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} sx & 0 \\ 0 & sy \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

2x2 Matrices

- What types of transformations can be represented with a 2x2 matrix?

2D Rotate around (0,0)?

$$\begin{aligned} x' &= \cos \Theta^*x - \sin \Theta^*y \\ y' &= \sin \Theta^*x + \cos \Theta^*y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} \cos \Theta & -\sin \Theta \\ \sin \Theta & \cos \Theta \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

2D Shear?

$$\begin{aligned} x' &= x + shx^*y \\ y' &= shy^*x + y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} 1 & shx \\ shy & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

2x2 Matrices

- What types of transformations can be represented with a 2x2 matrix?

2D Mirror over Y axis?

$$\begin{aligned} x' &= -x \\ y' &= y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} -1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

2D Mirror over (0,0)?

$$\begin{aligned} x' &= -x \\ y' &= -y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} -1 & 0 \\ 0 & -1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

2x2 Matrices

- What types of transformations can be represented with a 2x2 matrix?

2D Translation?

$$\begin{aligned} x' &= x + tx \\ y' &= y + ty \end{aligned}$$

NO!

Only linear 2D transformations
can be represented with a 2x2 matrix

Linear Transformations

- Linear transformations are combinations of ...

- Scale,

- Rotation,

- Shear, and

- Mirror

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ c & d \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

- Properties of linear transformations:

- Satisfies: $T(s_1\mathbf{p}_1 + s_2\mathbf{p}_2) = s_1T(\mathbf{p}_1) + s_2T(\mathbf{p}_2)$

- Origin maps to origin

- Lines map to lines

- Parallel lines remain parallel

- Ratios are preserved

- Closed under composition

2D Translation


- 2D translation represented by a 3x3 matrix
- Point represented with *homogeneous coordinates*

$$\begin{aligned} x' &= x + tx \\ y' &= y + ty \end{aligned} \quad \begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & tx \\ 0 & 1 & ty \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Homogeneous Coordinates



- Add a 3rd coordinate to every 2D point
 - (x, y, w) represents a point at location $(x/w, y/w)$
 - $(x, y, 0)$ represents a point at infinity
 - $(0, 0, 0)$ is not allowed

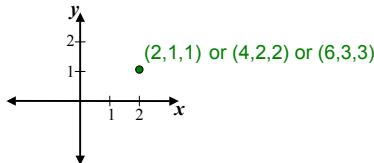

Convenient coordinate system to represent many useful transformations

Affine Transformations



- Affine transformations are combinations of ...
 - Linear transformations, and
 - Translations

$$\begin{bmatrix} x' \\ y' \\ w \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

- Properties of affine transformations:
 - Origin does not necessarily map to origin
 - Lines map to lines
 - Parallel lines remain parallel
 - Ratios are preserved
 - Closed under composition

Overview



- 2D Transformations
 - Basic 2D transformations
 - Matrix representation
 - **Matrix composition**
- 3D Transformations
 - Basic 3D transformations
 - Same as 2D
- Transformation Hierarchies
 - Scene graphs
 - Ray casting

Basic 2D Transformations



- Basic 2D transformations as 3×3 matrices

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & tx \\ 0 & 1 & ty \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Translate

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} sx & 0 & 0 \\ 0 & sy & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Scale

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} \cos\Theta & -\sin\Theta & 0 \\ \sin\Theta & \cos\Theta & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Rotate

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & shx & 0 \\ shy & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Shear

Projective Transformations



- Projective transformations ...
 - Affine transformations, and
 - Projective warps

$$\begin{bmatrix} x' \\ y' \\ w' \\ w \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

- Properties of projective transformations:
 - Origin does not necessarily map to origin
 - Lines map to lines
 - Parallel lines do not necessarily remain parallel
 - Ratios are not preserved (but “cross-ratios” are)
 - Closed under composition

Matrix Composition



- Transformations can be combined by matrix multiplication

$$\begin{bmatrix} x' \\ y' \\ w' \\ w \end{bmatrix} = \left(\begin{bmatrix} 1 & 0 & tx \\ 0 & 1 & ty \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos\Theta & -\sin\Theta & 0 \\ \sin\Theta & \cos\Theta & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} sx & 0 & 0 \\ 0 & sy & 0 \\ 0 & 0 & 1 \end{bmatrix} \right) \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

$$\mathbf{p}' = T(tx,ty)$$

$$R(\Theta)$$

$$S(sx,sy) \quad \mathbf{p}$$



Matrix Composition

- Matrices are a convenient and efficient way to represent a sequence of transformations
 - General purpose representation
 - Hardware matrix multiply
 - Efficiency with premultiplication
 - Matrix multiplication is associative

$$\mathbf{p}' = (\mathbf{T} * (\mathbf{R} * (\mathbf{S} * \mathbf{p})))$$

$$\mathbf{p}' = (\mathbf{T} * \mathbf{R} * \mathbf{S}) * \mathbf{p}$$



Matrix Composition

- Be aware: order of transformations matters
 - Matrix multiplication is not commutative

$$\mathbf{p}' = \mathbf{T} * \mathbf{R} * \mathbf{S} * \mathbf{p}$$

↔
"Global" "Local"




Matrix Composition

- Rotate by Θ around arbitrary point (a,b)

- $\mathbf{M} = \mathbf{T}(a,b) * \mathbf{R}(\Theta) * \mathbf{T}(-a,-b)$

The trick:


First, translate (a,b) to the origin.
Next, do the rotation about origin.
Finally, translate back.



- Scale by s_x, s_y around arbitrary point (a,b)

- $\mathbf{M} = \mathbf{T}(a,b) * \mathbf{S}(s_x, s_y) * \mathbf{T}(-a,-b)$

(Use the same trick.)



Overview

- 2D Transformations
 - Basic 2D transformations
 - Matrix representation
 - Matrix composition
- 3D Transformations
 - Basic 3D transformations
 - Same as 2D
- Transformation Hierarchies
 - Scene graphs
 - Ray casting

3D Transformations

- Same idea as 2D transformations
 - Homogeneous coordinates: (x,y,z,w)
 - 4×4 transformation matrices

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} a & b & c & d \\ e & f & g & h \\ i & j & k & l \\ m & n & o & p \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Basic 3D Transformations

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Identity

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} sx & 0 & 0 & 0 \\ 0 & sy & 0 & 0 \\ 0 & 0 & sz & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Scale

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & tx \\ 0 & 1 & 0 & ty \\ 0 & 0 & 1 & tz \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Translation

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} -1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Mirror over X axis

Basic 3D Transformations

Rotate around Z axis:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} \cos\theta & -\sin\theta & 0 & 0 \\ \sin\theta & \cos\theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Rotate around Y axis:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} \cos\theta & 0 & -\sin\theta & 0 \\ 0 & 1 & 0 & 0 \\ \sin\theta & 0 & \cos\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Rotate around X axis:


$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos\theta & -\sin\theta & 0 \\ 0 & \sin\theta & \cos\theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Overview

- 2D Transformations
 - Basic 2D transformations
 - Matrix representation
 - Matrix composition
- 3D Transformations
 - Basic 3D transformations
 - Same as 2D
- Transformation Hierarchies
 - Scene graphs
 - Ray casting


Transformation Hierarchies

- Scene may have hierarchy of coordinate systems
 - Each level stores matrix representing transformation from parent's coordinate system

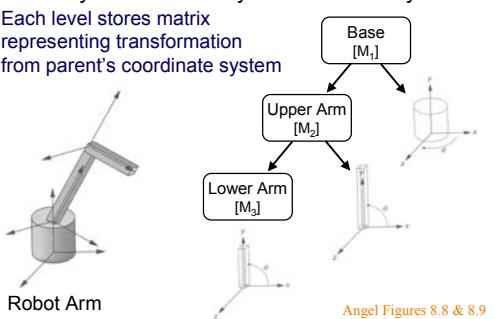

Transformation Example 1

- Well-suited for humanoid characters

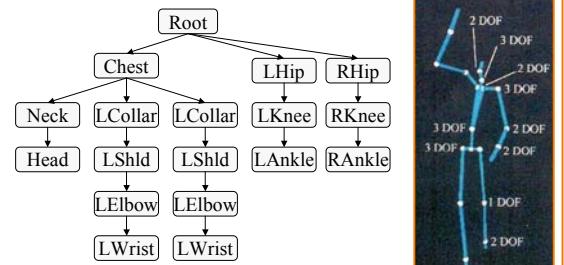


Transformation Example 1




Mike Marr, COS 426,
Princeton University, 1995

Transformation Example 2

- An object may appear in a scene multiple times

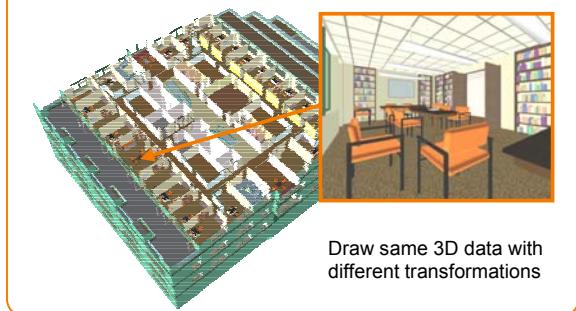


Transformation Example 2

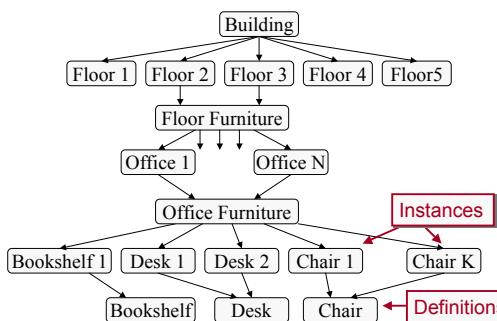

Ray Casting With Hierarchies

- Transform rays, not primitives

- For each node ...
 - Transform ray by inverse of matrix
 - Intersect with primitives
 - Transform hit by matrix

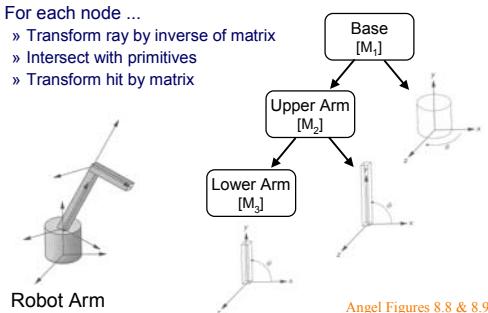

Angel Figures 8.8 & 8.9

Summary

- Coordinate systems
 - World coordinates
 - Modeling coordinates
- Representations of 3D modeling transformations
 - 4x4 Matrices
 - Scale, rotate, translate, shear, projections, etc.
 - Not arbitrary warps
- Composition of 3D transformations
 - Matrix multiplication (order matters)
 - Transformation hierarchies