




# Modeling Transformations

Adam Finkelstein  
Princeton University  
COS 426, Spring 2005



## Modeling Transformations

- Specify transformations for objects
  - Allows definitions of objects in own coordinate systems
  - Allows use of object definition multiple times in a scene



H&B Figure 109




## Overview


- 2D Transformations
  - Basic 2D transformations
  - Matrix representation
  - Matrix composition
- 3D Transformations
  - Basic 3D transformations
  - Same as 2D
- Transformation Hierarchies
  - Scene graphs
  - Ray casting




## 2D Modeling Transformations

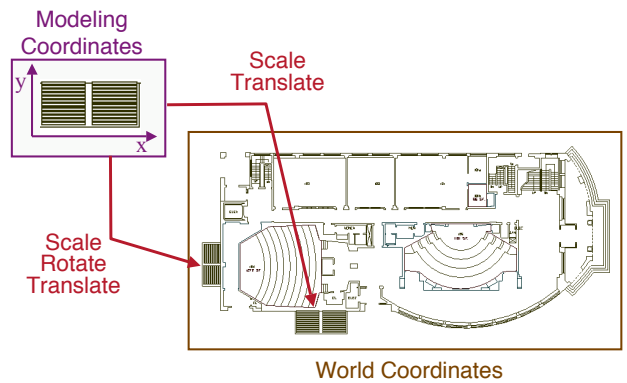

## 2D Modeling Transformations

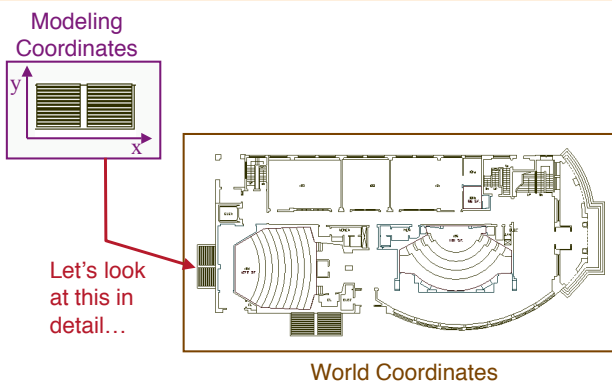

## 2D Modeling Transformations

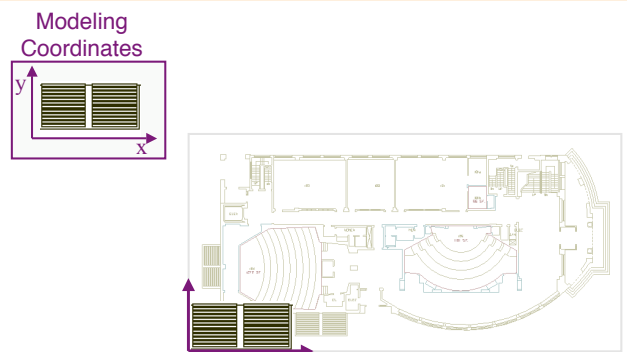


## 2D Modeling Transformations



Modeling Coordinates




Scale .3, .3

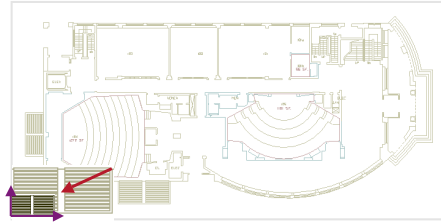


## 2D Modeling Transformations



Modeling Coordinates




Scale .3, .3  
Rotate -90

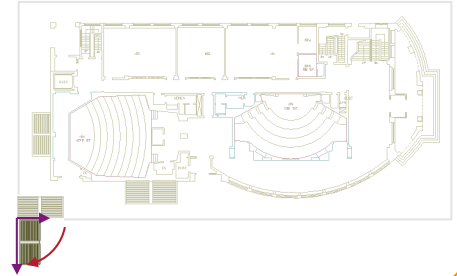


## 2D Modeling Transformations



Modeling Coordinates



Scale .3, .3  
Rotate -90  
Translate 5, 3

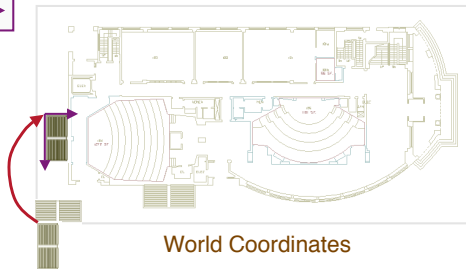

## Basic 2D Transformations



• Translation:

- $x' = x + tx$
- $y' = y + ty$

• Scale:


- $x' = x * sx$
- $y' = y * sy$

• Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

• Rotation:

- $x' = x*cos\theta - y*sin\theta$
- $y' = x*sin\theta + y*cos\theta$

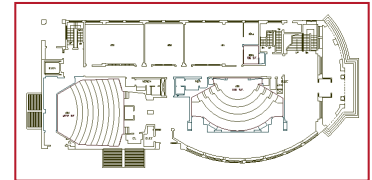

Transformations  
can be combined  
(with simple algebra)

## Basic 2D Transformations



• Translation:

- $x' = x + tx$
- $y' = y + ty$

• Scale:


- $x' = x * sx$
- $y' = y * sy$

• Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

• Rotation:

- $x' = x*cos\theta - y*sin\theta$
- $y' = x*sin\theta + y*cos\theta$

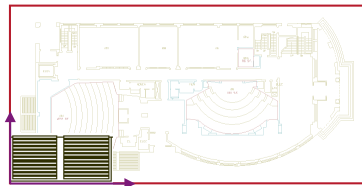

## Basic 2D Transformations



• Translation:

- $x' = x + tx$
- $y' = y + ty$

• Scale:


- $x' = x * sx$
- $y' = y * sy$

• Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

• Rotation:

- $x' = x*cos\theta - y*sin\theta$
- $y' = x*sin\theta + y*cos\theta$

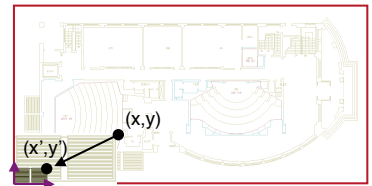

$$\begin{matrix} x' = x*sx \\ y' = y*sy \end{matrix}$$

## Basic 2D Transformations




- Translation:
  - $x' = x + tx$
  - $y' = y + ty$

- Scale:
  - $x' = x * sx$
  - $y' = y * sy$

- Shear:
  - $x' = x + hx*y$
  - $y' = y + hy*x$

- Rotation:
  - $x' = x*cos\theta - y*sin\theta$
  - $y' = x*sin\theta + y*cos\theta$

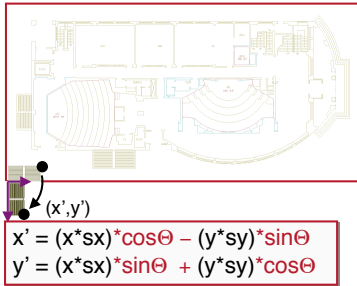

$$\begin{aligned} x' &= (x*sx)*\cos\theta - (y*sy)*\sin\theta \\ y' &= (x*sx)*\sin\theta + (y*sy)*\cos\theta \end{aligned}$$

## Basic 2D Transformations




- Translation:
  - $x' = x + tx$
  - $y' = y + ty$

- Scale:
  - $x' = x * sx$
  - $y' = y * sy$

- Shear:
  - $x' = x + hx*y$
  - $y' = y + hy*x$

- Rotation:
  - $x' = x*cos\theta - y*sin\theta$
  - $y' = x*sin\theta + y*cos\theta$

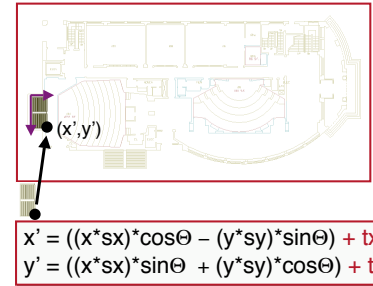

$$\begin{aligned} x' &= ((x*sx)*\cos\theta - (y*sy)*\sin\theta) + tx \\ y' &= ((x*sx)*\sin\theta + (y*sy)*\cos\theta) + ty \end{aligned}$$

## Basic 2D Transformations




- Translation:
  - $x' = x + tx$
  - $y' = y + ty$

- Scale:
  - $x' = x * sx$
  - $y' = y * sy$

- Shear:
  - $x' = x + hx*y$
  - $y' = y + hy*x$

- Rotation:
  - $x' = x*cos\theta - y*sin\theta$
  - $y' = x*sin\theta + y*cos\theta$

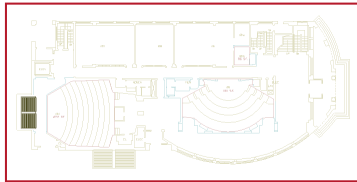

$$\begin{aligned} x' &= ((x*sx)*\cos\theta - (y*sy)*\sin\theta) + tx \\ y' &= ((x*sx)*\sin\theta + (y*sy)*\cos\theta) + ty \end{aligned}$$

## Overview



- 2D Transformations
  - Basic 2D transformations
  - Matrix representation
  - Matrix composition
- 3D Transformations
  - Basic 3D transformations
  - Same as 2D
- Transformation Hierarchies
  - Scene graphs
  - Ray casting

## Matrix Representation



- Represent 2D transformation by a matrix

$$\begin{bmatrix} a & b \\ c & d \end{bmatrix}$$

- Multiply matrix by column vector
  - ⇔ apply transformation to point

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ c & d \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} \quad \begin{aligned} x' &= ax + by \\ y' &= cx + dy \end{aligned}$$

## Matrix Representation



- Transformations combined by multiplication

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ c & d \end{bmatrix} \begin{bmatrix} e & f \\ g & h \end{bmatrix} \begin{bmatrix} i & j \\ k & l \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

Matrices are a convenient and efficient way to represent a sequence of transformations!

## 2x2 Matrices



- What types of transformations can be represented with a 2x2 matrix?

### 2D Identity?

$$\begin{aligned} x' &= x \\ y' &= y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

### 2D Scale around (0,0)?

$$\begin{aligned} x' &= sx * x \\ y' &= sy * y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} sx & 0 \\ 0 & sy \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

## 2x2 Matrices



- What types of transformations can be represented with a 2x2 matrix?

### 2D Rotate around (0,0)?

$$\begin{aligned} x' &= \cos \Theta * x - \sin \Theta * y \\ y' &= \sin \Theta * x + \cos \Theta * y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} \cos \Theta & -\sin \Theta \\ \sin \Theta & \cos \Theta \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

### 2D Shear?

$$\begin{aligned} x' &= x + shx * y \\ y' &= shy * x + y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} 1 & shx \\ shy & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

## 2x2 Matrices



- What types of transformations can be represented with a 2x2 matrix?

### 2D Mirror over Y axis?

$$\begin{aligned} x' &= -x \\ y' &= y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} -1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

### 2D Mirror over (0,0)?

$$\begin{aligned} x' &= -x \\ y' &= -y \end{aligned} \quad \begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} -1 & 0 \\ 0 & -1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

## 2x2 Matrices



- What types of transformations can be represented with a 2x2 matrix?

### 2D Translation?

$$\begin{aligned} x' &= x + tx \\ y' &= y + ty \end{aligned} \quad \text{NO!}$$

Only linear 2D transformations can be represented with a 2x2 matrix

## Linear Transformations



- Linear transformations are combinations of ...

- Scale,
- Rotation,
- Shear, and
- Mirror

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ c & d \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

- Properties of linear transformations:

- Satisfies:  $T(s_1\mathbf{p}_1 + s_2\mathbf{p}_2) = s_1T(\mathbf{p}_1) + s_2T(\mathbf{p}_2)$
- Origin maps to origin
- Lines map to lines
- Parallel lines remain parallel
- Ratios are preserved
- Closed under composition

## 2D Translation



- 2D translation represented by a 3x3 matrix


- Point represented with *homogeneous coordinates*

$$\begin{aligned} x' &= x + tx \\ y' &= y + ty \end{aligned} \quad \begin{matrix} \downarrow & & \downarrow \\ \begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & tx \\ 0 & 1 & ty \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} \end{matrix}$$

## Homogeneous Coordinates



- Add a 3rd coordinate to every 2D point
  - $(x, y, w)$  represents a point at location  $(x/w, y/w)$
  - $(x, y, 0)$  represents a point at infinity
  - $(0, 0, 0)$  is not allowed

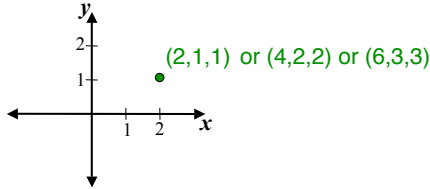

Convenient coordinate system to represent many useful transformations

## Basic 2D Transformations



- Basic 2D transformations as 3x3 matrices

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & tx \\ 0 & 1 & ty \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Translate

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} sx & 0 & 0 \\ 0 & sy & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Scale

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} \cos \Theta & -\sin \Theta & 0 \\ \sin \Theta & \cos \Theta & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Rotate

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & shx & 0 \\ shy & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Shear

## Affine Transformations



- Affine transformations are combinations of ...
  - Linear transformations, and
  - Translations

$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

- Properties of affine transformations:
  - Origin does not necessarily map to origin
  - Lines map to lines
  - Parallel lines remain parallel
  - Ratios are preserved
  - Closed under composition

## Projective Transformations



- Projective transformations ...
  - Affine transformations, and
  - Projective warps

$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \end{bmatrix} \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

- Properties of projective transformations:
  - Origin does not necessarily map to origin
  - Lines map to lines
  - Parallel lines do not necessarily remain parallel
  - Ratios are not preserved (but "cross-ratios" are)
  - Closed under composition

## Overview



- 2D Transformations
  - Basic 2D transformations
  - Matrix representation
  - Matrix composition
- 3D Transformations
  - Basic 3D transformations
  - Same as 2D
- Transformation Hierarchies
  - Scene graphs
  - Ray casting


## Matrix Composition



- Transformations can be combined by matrix multiplication

$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \left( \begin{bmatrix} 1 & 0 & tx \\ 0 & 1 & ty \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos \Theta & -\sin \Theta & 0 \\ \sin \Theta & \cos \Theta & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} sx & 0 & 0 \\ 0 & sy & 0 \\ 0 & 0 & 1 \end{bmatrix} \right) \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

$$\mathbf{p}' = \mathbf{T}(tx,ty) \quad \mathbf{R}(\Theta) \quad \mathbf{S}(sx,sy) \quad \mathbf{p}$$




## Matrix Composition



- Matrices are a convenient and efficient way to represent a sequence of transformations
  - General purpose representation
  - Hardware matrix multiply
  - Efficiency with premultiplication
    - » Matrix multiplication is associative

$$\mathbf{p}' = (\mathbf{T} * (\mathbf{R} * (\mathbf{S} * \mathbf{p})))$$

$$\mathbf{p}' = (\mathbf{T} * \mathbf{R} * \mathbf{S}) * \mathbf{p}$$




## Matrix Composition



- Be aware: order of transformations matters
  - » Matrix multiplication is not commutative

$$\mathbf{p}' = \mathbf{T} * \mathbf{R} * \mathbf{S} * \mathbf{p}$$

↔  
 “Global”      “Local”




## Matrix Composition



- Rotate by  $\Theta$  around arbitrary point (a,b)
  - $M = \mathbf{T}(a,b) * \mathbf{R}(\Theta) * \mathbf{T}(-a,-b)$


The trick:

First, translate (a,b) to the origin.  
Next, do the rotation about origin.  
Finally, translate back.



- Scale by  $s_x, s_y$  around arbitrary point (a,b)
  - $M = \mathbf{T}(a,b) * \mathbf{S}(s_x, s_y) * \mathbf{T}(-a,-b)$

(Use the same trick.)



## Overview



- 2D Transformations
  - Basic 2D transformations
  - Matrix representation
  - Matrix composition
- 3D Transformations
  - Basic 3D transformations
  - Same as 2D
- Transformation Hierarchies
  - Scene graphs
  - Ray casting

## 3D Transformations



- Same idea as 2D transformations
  - Homogeneous coordinates: (x,y,z,w)
  - 4x4 transformation matrices

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} a & b & c & d \\ e & f & g & h \\ i & j & k & l \\ m & n & o & p \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

## Basic 3D Transformations



$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Identity

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} sx & 0 & 0 & 0 \\ 0 & sy & 0 & 0 \\ 0 & 0 & sz & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Scale

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & tx \\ 0 & 1 & 0 & ty \\ 0 & 0 & 1 & tz \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Translation

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} -1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Mirror over X axis

## Basic 3D Transformations



Rotate around Z axis:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} \cos \Theta & -\sin \Theta & 0 & 0 \\ \sin \Theta & \cos \Theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Rotate around Y axis:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} \cos \Theta & 0 & -\sin \Theta & 0 \\ 0 & 1 & 0 & 0 \\ \sin \Theta & 0 & \cos \Theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Rotate around X axis:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos \Theta & -\sin \Theta & 0 \\ 0 & \sin \Theta & \cos \Theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

## Overview




- 2D Transformations
  - Basic 2D transformations
  - Matrix representation
  - Matrix composition
- 3D Transformations
  - Basic 3D transformations
  - Same as 2D
- Transformation Hierarchies
  - Scene graphs
  - Ray casting

## Transformation Hierarchies





- Scene may have hierarchy of coordinate systems
  - Each level stores matrix representing transformation from parent's coordinate system

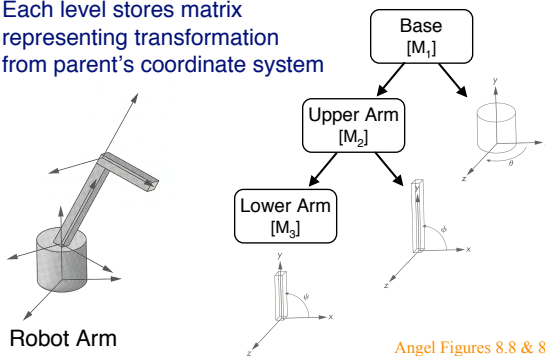

## Transformation Example 1



- Well-suited for humanoid characters

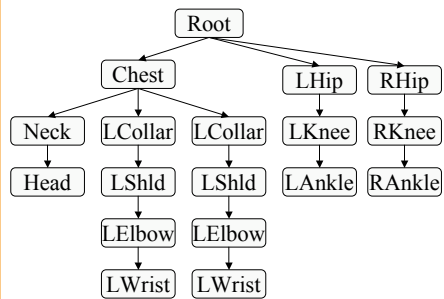

Rose et al. '96

## Transformation Example 1




Mike Marr, COS 426, Princeton University, 1995

## Transformation Example 2




- An object may appear in a scene multiple times

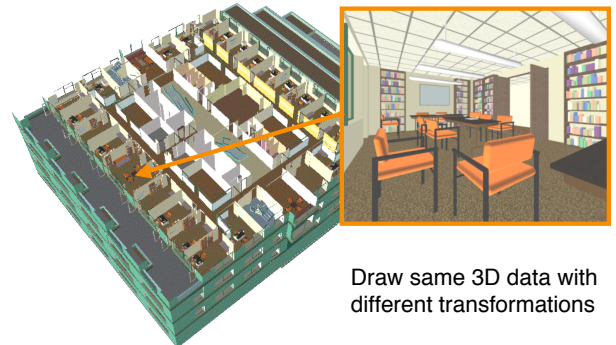

Draw same 3D data with different transformations

## Transformation Example 2

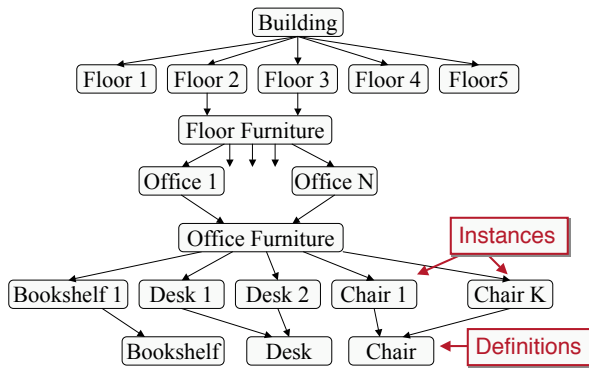


## Ray Casting With Hierarchies




- Transform rays, not primitives

- For each node ...
  - » Transform ray by inverse of matrix
  - » Intersect with primitives
  - » Transform hit by matrix



Robot Arm

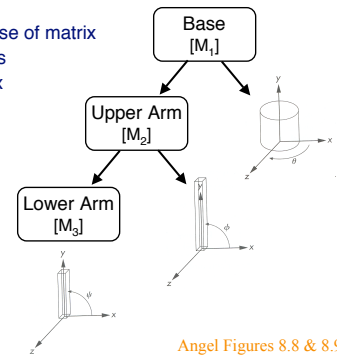

Angel Figures 8.8 & 8.9

## Summary



- Coordinate systems
  - World coordinates
  - Modeling coordinates
- Representations of 3D modeling transformations
  - 4x4 Matrices
    - » Scale, rotate, translate, shear, projections, etc.
    - » Not arbitrary warps
- Composition of 3D transformations
  - Matrix multiplication (order matters)
  - Transformation hierarchies