



1.4 Arrays

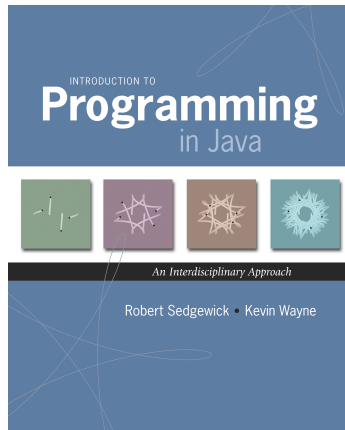

Introduction to Programming in Java: An Interdisciplinary Approach · Robert Sedgewick and Kevin Wayne · Copyright © 2008 · **

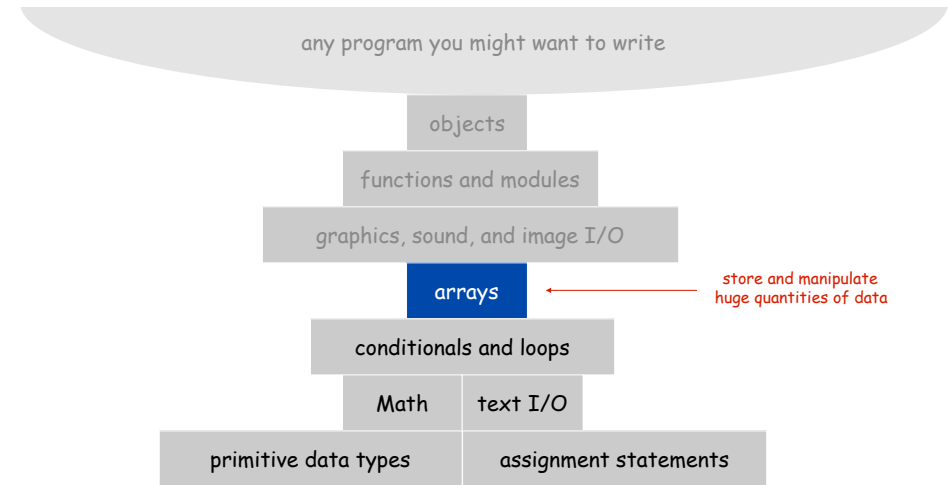

Arrays

This lecture. Store and manipulate huge quantities of data.

Array. Indexed sequence of values of the same type.

Examples.

- 52 playing cards in a deck.
- 5 thousand undergrads at Princeton.
- 1 million characters in a book.
- 10 million audio samples in an MP3 file.
- 4 billion nucleotides in a DNA strand.
- 73 billion Google queries per year.
- 50 trillion cells in the human body.
- 6.02×10^{23} particles in a mole.

index	value
0	wayne
1	rs
2	doug
3	dgabai
4	maia
5	llp
6	funk
7	blei

Many Variables of the Same Type

Goal. 10 variables of the same type.

```
// tedious and error-prone
double a0, a1, a2, a3, a4, a5, a6, a7, a8, a9;
a0 = 0.0;
a1 = 0.0;
a2 = 0.0;
a3 = 0.0;
a4 = 0.0;
a5 = 0.0;
a6 = 0.0;
a7 = 0.0;
a8 = 0.0;
a9 = 0.0;
...
a4 = 3.0;
...
a4 = 8.0;
...
double x = a4 + a8;
```

Many Variables of the Same Type

Goal. 10 variables of the same type.

```
// easy alternative
double[] a = new double[10];
...
a[4] = 3.0;
...
a[8] = 8.0;
...
double x = a[4] + a[8];
```

declares, creates, and initializes
[stay tuned for details]

5

Many Variables of the Same Type

Goal. 1 million variables of the same type.

```
// scales to handle large arrays
double[] a = new double[1000000];
...
a[123456] = 3.0;
...
a[987654] = 8.0;
...
double x = a[123456] + a[987654];
```

declares, creates, and initializes
[stay tuned for details]

6

Arrays in Java

Java has special language support for arrays.

- To make an array: declare, create, and initialize it.
- To access element i of array named a , use $a[i]$.
- Array indices start at 0.

```
int N = 10;           // size of array
double[] a;          // declare the array
a = new double[N];   // create the array
for (int i = 0; i < N; i++) // initialize the array
    a[i] = 0.0;      // all to 0.0
```

7

Arrays in Java

Java has special language support for arrays.

- To make an array: declare, create, and initialize it.
- To access element i of array named a , use $a[i]$.
- Array indices start at 0.

```
int N = 10;           // size of array
double[] a;          // declare the array
a = new double[N];   // create the array
for (int i = 0; i < N; i++) // initialize the array
    a[i] = 0.0;      // all to 0.0
```

Compact alternative.

- Declare, create, and initialize in one statement.
- Default initialization: all numbers automatically set to zero.

```
int N = 10;           // size of array
double[] a = new double[N]; // declare, create, init
```

8

Vector Dot Product

Dot product. Given two vectors $x[]$ and $y[]$ of length N , their dot product is the sum of the products of their corresponding components.

```
double[] x = { 0.3, 0.6, 0.1 };
double[] y = { 0.5, 0.1, 0.4 };
int N = x.length;
double sum = 0.0;
for (int i = 0; i < N; i++) {
    sum = sum + x[i]*y[i];
}
```

i	x[i]	y[i]	x[i]*y[i]	sum
				0
0	.30	.50	.15	.15
1	.60	.10	.06	.21
2	.10	.40	.04	.25
				.25

Array-Processing Examples

```
double[] a = new double[N];
for (int i = 0; i < N; i++)
    a[i] = Math.random();
```

create an array with random values

```
for (int i = 0; i < N; i++)
    System.out.println(a[i]);
```

print the array values, one per line

```
double sum = 0.0;
for (int i = 0; i < N; i++)
    sum += a[i];
double average = sum / N;
```

compute the average of the array values

```
double[] b = new double[N];
for (int i = 0; i < N; i++)
    b[i] = a[i];
```

copy one array to another array

```
double max = Double.NEGATIVE_INFINITY;
for (int i = 0; i < N; i++)
    if (a[i] > max)
        max = a[i];
```

find the maximum of the array values

9

10

Setting Array Values at Compile Time

Shuffling a Deck

Ex. Print a random card.

```
String[] rank = {
    "2", "3", "4", "5", "6", "7", "8", "9",
    "10", "Jack", "Queen", "King", "Ace"
};

String[] suit = {
    "Clubs", "Diamonds", "Hearts", "Spades"
};

int i = (int) (Math.random() * 13); // between 0 and 12
int j = (int) (Math.random() * 4); // between 0 and 3

System.out.println(rank[i] + " of " + suit[j]);
```

12

Setting Array Values at Run Time

Ex. Create a deck of playing cards and print them out.

```
String[] deck = new String[52];
for (int i = 0; i < 13; i++)
    for (int j = 0; j < 4; j++)
        deck[4*i + j] = rank[i] + " of " + suit[j];

for (int i = 0; i < 52; i++)
    System.out.println(deck[i]);
```

typical array-processing
code changes values
at runtime

Q. In what order does it output them?

A. two of clubs
two of diamonds
two of hearts
two of spades
three of clubs
...

B. two of clubs
three of clubs
four of clubs
five of clubs
six of clubs
...

13

Shuffling

Goal. Given an array, rearrange its elements in **random** order.

Shuffling algorithm.

- In iteration i , pick random card from $deck[i]$ through $deck[N-1]$, with each card equally likely.
- Exchange it with $deck[i]$.

```
int N = deck.length;
for (int i = 0; i < N; i++) {
    int r = i + (int) (Math.random() * (N-i));
    String t = deck[r];
    deck[r] = deck[i];
    deck[i] = t;
}
```

} swap idiom between i and $N-1$



14

Shuffling a Deck of Cards: Putting Everything Together

```
public class Deck {
    public static void main(String[] args) {
        String[] suit = { "Clubs", "Diamonds", "Hearts", "Spades" };
        String[] rank = { "2", "3", "4", "5", "6", "7", "8", "9",
            "10", "Jack", "Queen", "King", "Ace" };

        int SUITS = suit.length;
        int RANKS = rank.length;
        int N = SUITS * RANKS;

        String[] deck = new String[N]; // build the deck
        for (int i = 0; i < RANKS; i++)
            for (int j = 0; j < SUITS; j++)
                deck[SUITS*i + j] = rank[i] + " of " + suit[j];

        for (int i = 0; i < N; i++) { // shuffle
            int r = i + (int) (Math.random() * (N-i));
            String t = deck[r];
            deck[r] = deck[i];
            deck[i] = t;
        }

        for (int i = 0; i < N; i++) // print shuffled deck
            System.out.println(deck[i]);
    }
}
```

avoid "hardwired" constants

15

Shuffling a Deck of Cards

```
% java Deck
5 of Clubs
Jack of Hearts
9 of Spades
10 of Spades
9 of Clubs
7 of Spades
6 of Diamonds
7 of Hearts
7 of Clubs
4 of Spades
Queen of Diamonds
10 of Hearts
5 of Diamonds
Jack of Clubs
Ace of Hearts
...
5 of Spades
```

```
% java Deck
10 of Diamonds
King of Spades
2 of Spades
3 of Clubs
4 of Spades
Queen of Clubs
2 of Hearts
7 of Diamonds
6 of Spades
Queen of Spades
3 of Spades
Jack of Diamonds
6 of Diamonds
8 of Spades
9 of Diamonds
...
10 of Spades
```

16

Coupon Collector

Coupon collector problem. Given N different card types, how many do you have to collect before you have (at least) one of each type?



assuming each possibility is equally likely for each card that you collect

Simulation algorithm. Repeatedly choose an integer i between 0 and $N-1$. Stop when we have at least one card of every type.

Q. How to check if we've seen a card of type i ?

A. Maintain a boolean array so that `found[i]` is true if we've already collected a card of type i .

Coupon Collector: Java Implementation

```
public class CouponCollector {
    public static void main(String[] args) {
        int N = Integer.parseInt(args[0]);
        int cardcnt = 0; // number of cards collected
        int valcnt = 0; // number of distinct cards

        // do simulation
        boolean[] found = new boolean[N];
        while (valcnt < N) {
            int val = (int) (Math.random() * N);
            cardcnt++;
            if (!found[val]) {
                valcnt++;
                found[val] = true;
            }
        }

        // all N distinct cards found
        System.out.println(cardcnt);
    }
}
```

Coupon Collector: Debugging

Debugging. Add code to print contents of **all** variables.

val	found					valcnt	cardcnt
	0	1	2	3	4		
	F	F	F	F	F	0	0
2	F	F	T	F	F	1	1
0	T	F	T	F	F	2	2
4	T	F	T	F	T	3	3
0	T	F	T	F	T	3	4
1	T	T	T	F	T	4	5
2	T	T	T	F	T	4	6
5	T	T	T	F	T	5	7
0	T	T	T	F	T	5	8
1	T	T	T	F	T	5	9
3	T	T	T	T	T	6	10

Challenge. Debugging with arrays requires tracing many variables.

Coupon collector problem. Given N different possible cards, how many do you have to collect before you have (at least) one of each type?

Fact. About $N (1 + 1/2 + 1/3 + \dots + 1/N) \sim N \ln N$.

see ORF 245 or COS 340


Ex. $N = 30$ baseball teams. Expect to wait ≈ 120 years before all teams win a World Series.

under idealized assumptions

Q. Given a sequence from nature, does it have same characteristics as a random sequence?

A. No easy answer - many tests have been developed.

Coupon collector test. Compare number of elements that need to be examined before all values are found against the corresponding answer for a random sequence.

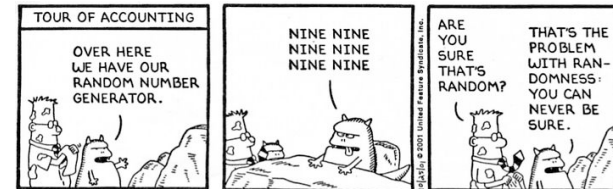

Multidimensional Arrays


Two-Dimensional Arrays

Two-dimensional arrays.

- Table of data for each experiment and outcome.
- Table of grades for each student and assignments.
- Table of grayscale values for each pixel in a 2D image.

Mathematical abstraction. Matrix.

Java abstraction. 2D array.

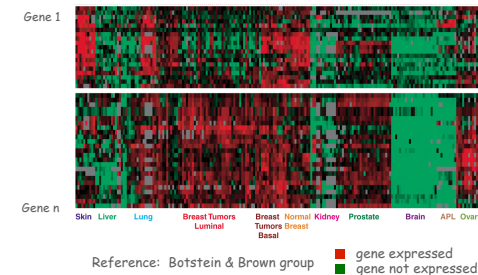

Two-Dimensional Arrays in Java

Array access. Use `a[i][j]` to access element in row `i` and column `j`.

Zero-based indexing. Row and column indices start at 0.

```
int M = 10;
int N = 3;
double[][] a = new double[M][N];
for (int i = 0; i < M; i++) {
    for (int j = 0; j < N; j++) {
        a[i][j] = 0.0;
    }
}
```

a[0][0]	a[0][1]	a[0][2]
a[1][0]	a[1][1]	a[1][2]
a[2][0]	a[2][1]	a[2][2]
a[3][0]	a[3][1]	a[3][2]
a[4][0]	a[4][1]	a[4][2]
a[5][0]	a[5][1]	a[5][2]
a[6][0]	a[6][1]	a[6][2]
a[7][0]	a[7][1]	a[7][2]
a[8][0]	a[8][1]	a[8][2]
a[9][0]	a[9][1]	a[9][2]

A 10-by-3 array

25

Setting 2D Array Values at Compile Time

Initialize 2D array by listing values.

```
double[][] p = {
    { .02, .92, .02, .02, .02 },
    { .02, .02, .32, .32, .32 },
    { .02, .02, .02, .92, .02 },
    { .92, .02, .02, .02, .02 },
    { .47, .02, .47, .02, .02 },
};
```

			a[1][3]	
	.02	.92	.02	.02
row 1 →	.02	.02	.32	.32
	.02	.02	.02	.92
	.92	.02	.02	.02
	.47	.02	.47	.02
			↑	column 3

26

Matrix Addition

Matrix addition. Given two `N`-by-`N` matrices `a` and `b`, define `c` to be the `N`-by-`N` matrix where `c[i][j]` is the sum `a[i][j] + b[i][j]`.

```
double[][] c = new double[N][N];
for (int i = 0; i < N; i++)
    for (int j = 0; j < N; j++)
        c[i][j] = a[i][j] + b[i][j];
```

a[1][2]	.70	.20	.10
	.30	.60	.10
	.50	.10	.40
b[1][2]	.80	.30	.50
	.10	.40	.10
	.10	.30	.40
c[1][2]	1.5	.50	.60
	.40	1.0	.20
	.60	.40	.80

27

Matrix Multiplication

Matrix multiplication. Given two `N`-by-`N` matrices `a` and `b`, define `c` to be the `N`-by-`N` matrix where `c[i][j]` is the dot product of the `i`th row of `a` and the `j`th column of `b`.

```
double[][] c = new double[N][N];
for (int i = 0; i < N; i++)
    for (int j = 0; j < N; j++)
        for (int k = 0; k < N; k++)
            c[i][j] += a[i][k] * b[k][j];
```

all values initialized to 0

dot product of row `i` of `a[][]` and column `j` of `b[][]`

a[1][2]	.70	.20	.10
← row 1	.30	.60	.10
	.50	.10	.40
b[1][2]	.80	.30	.50
↓ column 2	.10	.40	.10
	.10	.30	.40
c[1][2]	.59	.32	.41
	.31	.36	.25
←	.45	.31	.42

$c[1][2] = .3 * .5 + .6 * .1 + .1 * .4 = .25$

28

Q. How many scalar multiplications multiply two N-by-N matrices?


- A. N B. N^2 C. N^3 D. N^4

```
double[][] c = new double[N][N];
for (int i = 0; i < N; i++)
    for (int j = 0; j < N; j++)
        for (int k = 0; k < N; k++)
            c[i][j] += a[i][k] * b[k][j];
```

Arrays.

- Organized way to store huge quantities of data.
- Almost as easy to use as primitive types.
- Can directly access an element given its index.

Ahead. Reading in large quantities of data from a file into an array.

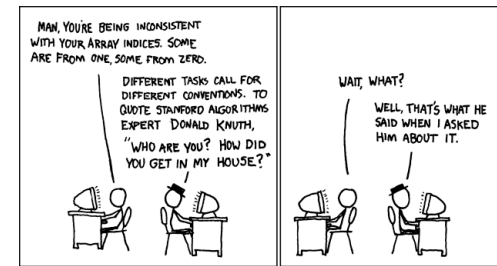

http://imgs.xkcd.com/comics/donald_knuth.png

