




2.1 Functions

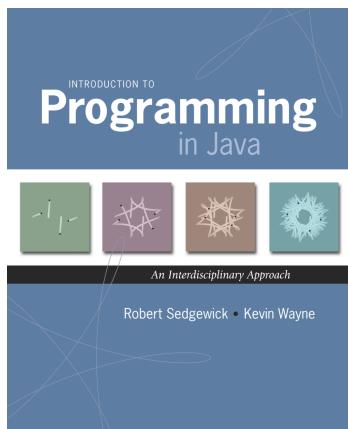

Introduction to Programming in Java: An Interdisciplinary Approach · Robert Sedgewick and Kevin Wayne · Copyright © 2008 · February 22, 2009 3:08 AM

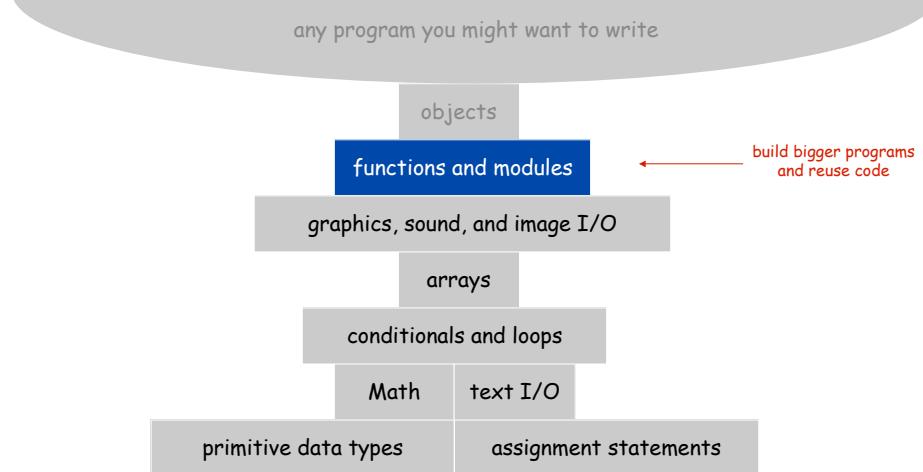

2.1 Functions

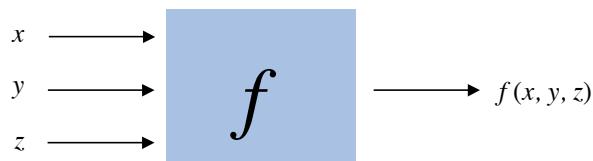

Functions (Static Methods)

Java function.

- Takes zero or more input arguments.
- Returns one output value.
- Side effects (e.g., output to standard draw). ← more general than mathematical functions

Applications.


- Scientists use mathematical functions to calculate formulas.
- Programmers use functions to build modular programs.
- You use functions for both.

Examples.

- Built-in functions: `Math.random()`, `Math.abs()`, `Integer.parseInt()`.
- Our I/O libraries: `StdIn.readInt()`, `StdDraw.line()`, `StdAudio.play()`.
- User-defined functions: `main()`.

Anatomy of a Java Function


Java functions. Easy to write your own.

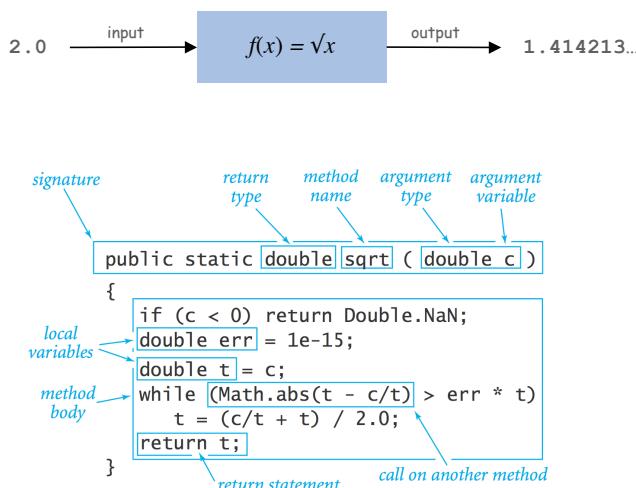

Scope

Scope (of a name). The code that can refer to that name.

Ex. A variable's scope is code following the declaration in the block.

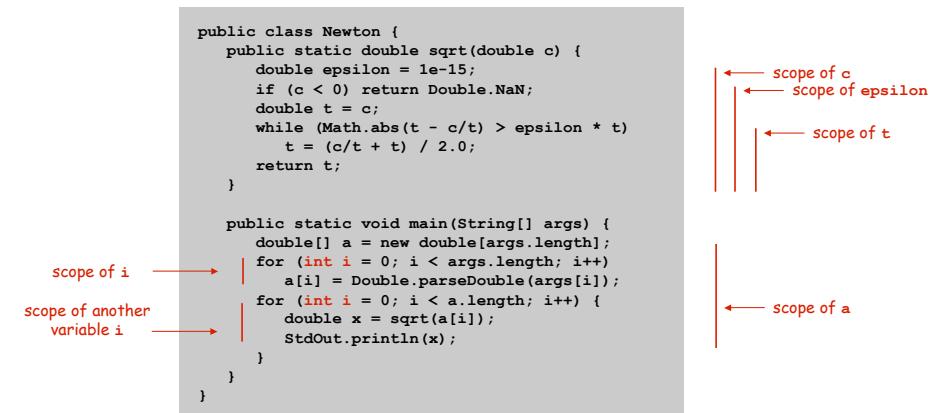


Best practice: declare variables to limit their scope.

5

6

Flow of Control

Key point. Functions provide a **new way** to control the flow of execution.

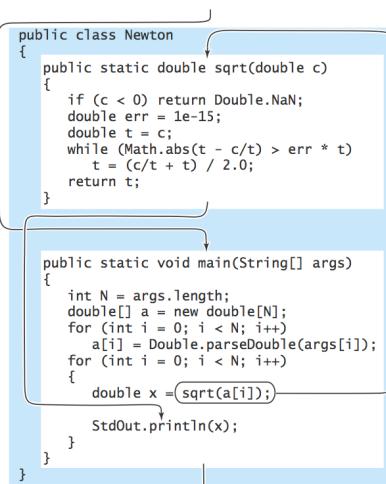


Flow of Control

Key point. Functions provide a **new way** to control the flow of execution.

What happens when a function is called:

- Control transfers to the function code.
- Argument variables are assigned the values given in the call.
- Function code is executed.
- Return value is assigned in place of the function name in calling code.
- Control transfers back to the calling code.



Note. This is known as "pass by value."

7

8

Function Examples

<i>absolute value of an int value</i>	<pre>public static int abs(int x) { if (x < 0) return -x; else return x; }</pre>	<i>overloading</i>
<i>absolute value of a double value</i>	<pre>public static double abs(double x) { if (x < 0.0) return -x; else return x; }</pre>	
<i>primality test</i>	<pre>public static boolean isPrime(int N) { if (N < 2) return false; for (int i = 2; i <= N/i; i++) if (N % i == 0) return false; return true; }</pre>	
<i>hypotenuse of a right triangle</i>	<pre>public static double hypotenuse(double a, double b) { return Math.sqrt(a*a + b*b); }</pre>	<i>multiple arguments</i>

9

Function Challenge 1a

Q. What happens when you compile and run the following code?

```
public class Cubes1 {
    public static int cube(int i) {
        int j = i * i * i;
        return j;
    }

    public static void main(String[] args) {
        int N = Integer.parseInt(args[0]);
        for (int i = 1; i <= N; i++)
            StdOut.println(i + " " + cube(i));
    }
}

% javac Cubes1.java
% java Cubes1 6
1 1
2 8
3 27
4 64
5 125
6 216
```

10

Function Challenge 1b

Function Challenge 1c

Q. What happens when you compile and run the following code?

Q. What happens when you compile and run the following code?

```
public class Cubes2 {
    public static int cube(int i) {
        int i = i * i * i;
        return i;
    }

    public static void main(String[] args) {
        int N = Integer.parseInt(args[0]);
        for (int i = 1; i <= N; i++)
            StdOut.println(i + " " + cube(i));
    }
}
```

11

```
public class Cubes3 {
    public static int cube(int i) {
        i = i * i * i;
    }

    public static void main(String[] args) {
        int N = Integer.parseInt(args[0]);
        for (int i = 1; i <= N; i++)
            StdOut.println(i + " " + cube(i));
    }
}
```

12

Function Challenge 1d

Q. What happens when you compile and run the following code?

```
public class Cubes4 {
    public static int cube(int i) {
        i = i * i * i;
        return i;
    }

    public static void main(String[] args) {
        int N = Integer.parseInt(args[0]);
        for (int i = 1; i <= N; i++)
            StdOut.println(i + " " + cube(i));
    }
}
```

Function Challenge 1e

Q. What happens when you compile and run the following code?

```
public class Cubes5 {
    public static int cube(int i) {
        return i * i * i;
    }

    public static void main(String[] args) {
        int N = Integer.parseInt(args[0]);
        for (int i = 1; i <= N; i++)
            StdOut.println(i + " " + cube(i));
    }
}
```

13


14

Gaussian Distribution


Standard Gaussian distribution.

- "Bell curve."
- Basis of most statistical analysis in social and physical sciences.

Ex. 2000 SAT scores follow a Gaussian distribution with mean $\mu = 1019$, stddev $\sigma = 209$.

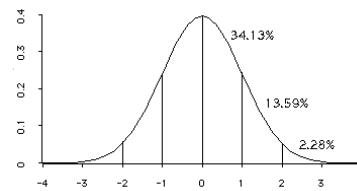

$$\phi(x) = \frac{1}{\sqrt{2\pi}} e^{-x^2/2}$$

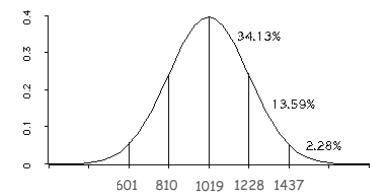

$$\begin{aligned} \phi(x, \mu, \sigma) &= \frac{1}{\sigma\sqrt{2\pi}} e^{-(x-\mu)^2/2\sigma^2} \\ &= \phi\left(\frac{x-\mu}{\sigma}\right) / \sigma \end{aligned}$$

16

Java Function for $\phi(x)$

Mathematical functions. Use built-in functions when possible;
build your own when not available.

```
public class Gaussian {
    public static double phi(double x) {  $\phi(x) = \frac{1}{\sqrt{2\pi}} e^{-x^2/2}$ 
        return Math.exp(-x*x / 2) / Math.sqrt(2 * Math.PI);
    }

    public static double phi(double x, double mu, double sigma) {
        return phi((x - mu) / sigma) / sigma;
    }
}
```

$$\phi(x, \mu, \sigma) = \phi\left(\frac{x-\mu}{\sigma}\right) / \sigma$$


- Overloading.** Functions with different signatures are different.
- Multiple arguments.** Functions can take any number of arguments.
- Calling other functions.** Functions can call other functions.

↗ library or user-defined

Gaussian Cumulative Distribution Function

Goal. Compute Gaussian cdf $\Phi(z)$.

Challenge. No "closed form" expression and not in Java library.

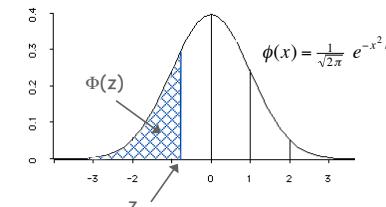

$$\begin{aligned} \Phi(z) &= \int_{-\infty}^z \phi(x) dx && \text{Taylor series} \\ &= \frac{1}{2} + \phi(z) \left(z + \frac{z^3}{3} + \frac{z^5}{3 \cdot 5} + \frac{z^7}{3 \cdot 5 \cdot 7} + \dots \right) \end{aligned}$$

Bottom line. 1,000 years of mathematical formulas at your fingertips.

Java function for $\Phi(z)$

```
public class Gaussian {
    public static double phi(double x)
        // as before

    public static double Phi(double z) {
        if (z < -8.0) return 0.0;
        if (z > 8.0) return 1.0;
        double sum = 0.0, term = z;
        for (int i = 3; sum + term != sum; i += 2) {
            sum = sum + term;
            term = term * z * z / i;
        }
        return 0.5 + sum * phi(z);
    }


    public static double Phi(double z, double mu, double sigma) {
        return Phi((z - mu) / sigma);
    }
}
```

↗ $\Phi(z, \mu, \sigma) = \int_{-\infty}^z \phi(z, \mu, \sigma) = \Phi((z-\mu) / \sigma)$

SAT Scores

Q. NCAA requires at least 820 for Division I athletes.
What fraction of test takers in 2000 do not qualify?

A. $\Phi(820, \mu, \sigma) \approx 0.17051$. [approximately 17%]

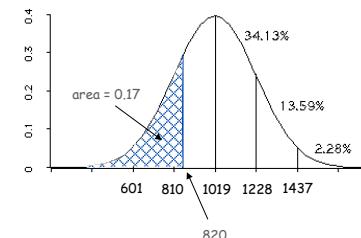

```
double fraction = Gaussian.Phi(820, 1019, 209);
```

Q. Why relevant in mathematics?

A. Central limit theorem: under very general conditions, average of a set of variables tends to the Gaussian distribution.

Q. Why relevant in the sciences?

A. Models a wide range of natural phenomena and random processes.

- Weights of humans, heights of trees in a forest.
- SAT scores, investment returns.

Caveat.

Everybody believes in the exponential law of errors: the experimenters, because they think it can be proved by mathematics; and the mathematicians, because they believe it has been established by observation. - M. Lippman in a letter to H. Poincaré

21

Functions enable you to build a new layer of abstraction.

- Takes you beyond pre-packaged libraries.
- You build the tools you need: `Gaussian.phi()`, ...

Process.

- Step 1: identify a useful feature.
- Step 2: implement it.
- Step 3: use it.
- Step 3': re-use it in **any** of your programs.


Digital Audio

Crash Course in Sound

Sound. Perception of the **vibration** of molecules in our eardrums.

Concert A. Sine wave, scaled to oscillate at 440Hz.

Other notes. 12 notes on chromatic scale, divided logarithmically.

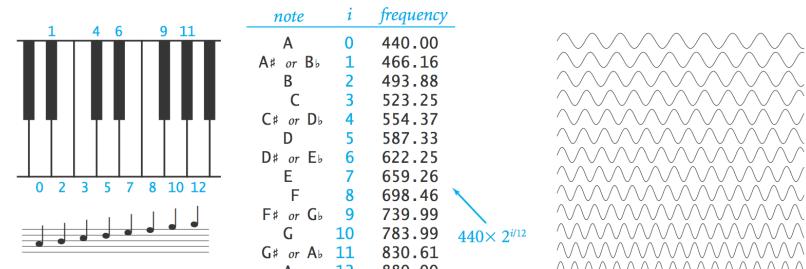


Notes, numbers, and waves

22

24

Digital Audio

Sampling. Represent curve by sampling it at regular intervals.

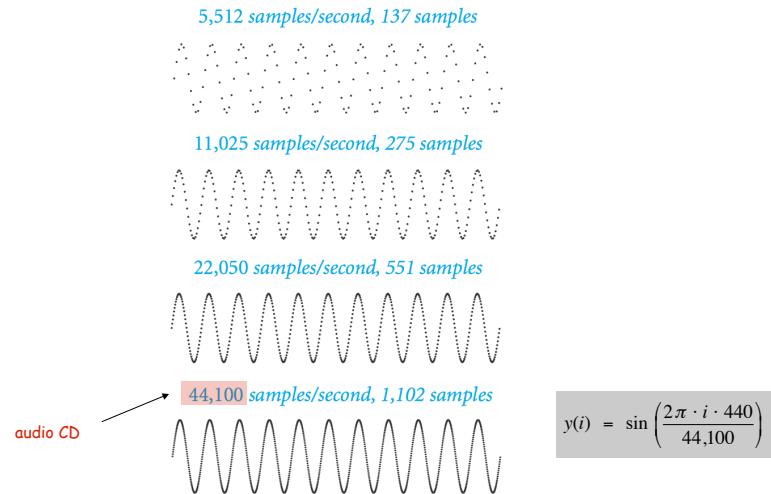

25

Musical Tone Function

Musical tone. Create a music tone of a given frequency and duration.

```
public static double[] tone(double hz, double seconds) {
    int SAMPLE_RATE = 44100;
    int N = (int) (seconds * SAMPLE_RATE);
    double[] a = new double[N+1];
    for (int i = 0; i <= N; i++) {
        a[i] = Math.sin(2 * Math.PI * i * hz / SAMPLE_RATE);
    }
    return a;
}
```

$$y(i) = \sin\left(\frac{2\pi \cdot i \cdot hz}{44,100}\right)$$

Remark. Can use arrays as function return value and/or argument.

26

Digital Audio in Java

Standard audio. Library for playing digital audio.

```
public class StdAudio
    void play(String file)           play the given .wav file
    void play(double[] a)            play the given sound wave
    void play(double x)              play sample for 1/44100 second
    void save(String file, double[] a) save to a .wav file
    void double[] read(String file)   read from a .wav file
```

Concert A. Play concert A for 1.5 seconds using StdAudio.


```
double[] a = tone(440, 1.5);
StdAudio.play(a);
```

27

Harmonics

Concert A with harmonics. Obtain richer sound by adding tones one octave above and below concert A.

880 Hz 220 Hz 440 Hz

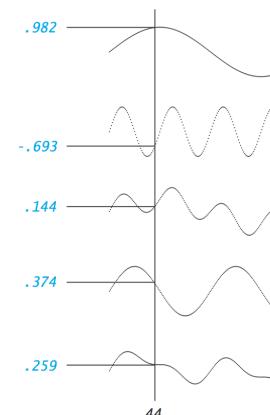

lo = tone(220, .0041);
lo[44] = .982

hi = tone(880, .0041);
hi[44] = -.693

h = sum(hi, lo, .5, .5);
 $h[44] = .5*lo[44] + .5*hi[44]$
 $= .5*.982 - .5*-.693 = .144$

A = tone(440, .0041);
 $A[44] = .374$

sum(A, h, .5, .5);
 $A[44] + h[44] = .5*.144 + .5*.374$
 $= .259$

28

Harmonics

```

public class PlayThatTune {

    // return weighted sum of two arrays
    public static double[] sum(double[] a, double[] b, double awt, double bwt) {
        double[] c = new double[a.length];
        for (int i = 0; i < a.length; i++)
            c[i] = a[i]*awt + b[i]*bwt;
        return c;
    }


    // return a note of given pitch and duration
    public static double[] note(int pitch, double duration) {
        double hz = 440.0 * Math.pow(2, pitch / 12.0);
        double[] a = tone(1.0 * hz, duration);
        double[] hi = tone(2.0 * hz, duration);
        double[] lo = tone(0.5 * hz, duration);
        double[] h = sum(hi, lo, .5, .5);
        return sum(a, h, .5, .5);
    }

    public static double[] tone(double hz, double t)
        // see previous slide

    public static void main(String[] args)
        // see next slide
    }
}

```

29

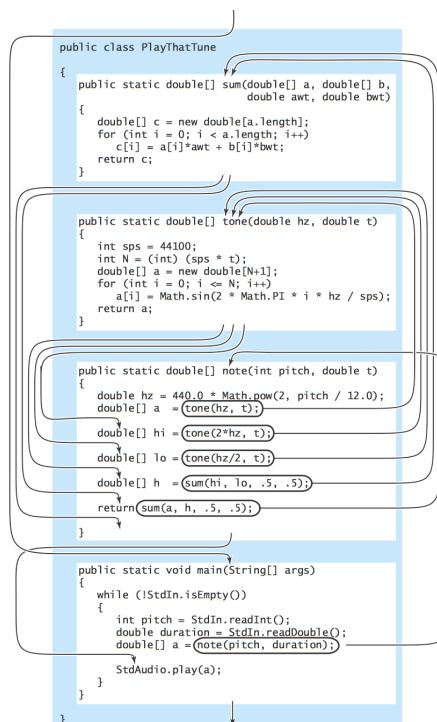

31

[Play that tune.](#) Read in pitches and durations from standard input, and play using standard audio.

```

public static void main(String[] args) {
    while (!StdIn.isEmpty()) {
        int pitch = StdIn.readInt();
        double duration = StdIn.readDouble();
        double[] a = note(pitch, duration);
        StdAudio.play(a);
    }
}

```

```


% more elise.txt      % java PlayThatTune < elise.txt
7 .125
6 .125
7 .125
6 .125
7 .125
2 .125
5 .125
3 .125
0 .25

```



30

2.2 Libraries and Clients

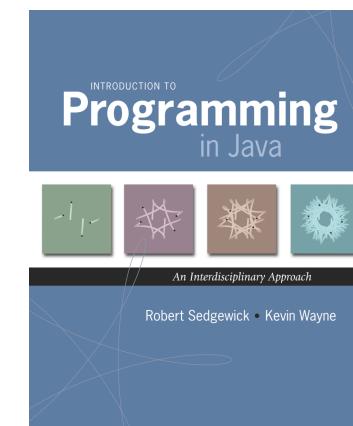


Libraries

Library. A module whose methods are primarily intended for use by many other programs.

Client. Program that calls a library.

API. Contract between client and implementation.


Implementation. Program that implements the methods in an API.

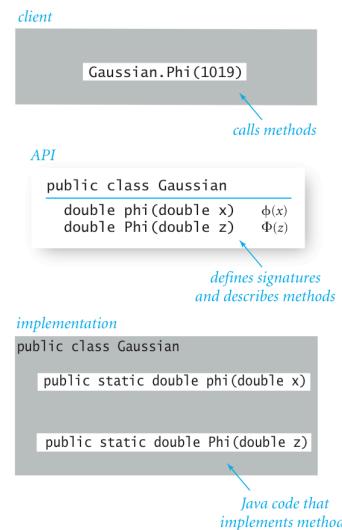

2

Random Numbers

“ The generation of random numbers is far too important to leave to chance. Anyone who considers arithmetical methods of producing random digits is, of course, in a state of sin. ”

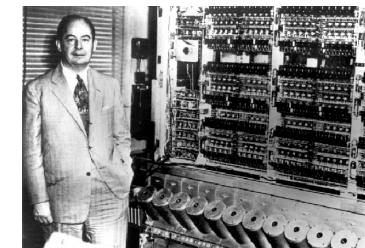

Jon von Neumann (left), ENIAC (right)

Standard Random

Standard random. Our library to generate pseudo-random numbers.

```
public class StdRandom
    int uniform(int N)           integer between 0 and N-1
    double uniform(double lo, double hi) real between lo and hi
    boolean bernoulli(double p)   true with probability p
    double gaussian()           normal, mean 0, standard deviation 1
    double gaussian(double m, double s) normal, mean m, standard deviation s
    int discrete(double[] a)     i with probability a[i]
    void shuffle(double[] a)     randomly shuffle the array a[]
```

```
int getRandomNumber()
{
    return 4; // chosen by fair dice roll.
              // guaranteed to be random.
}
```

Standard Random

```
public class StdRandom {
    // between a and b
    public static double uniform(double a, double b) {
        return a + Math.random() * (b-a);
    }

    // between 0 and N-1
    public static int uniform(int N) {
        return (int) (Math.random() * N);
    }

    // true with probability p
    public static boolean bernoulli(double p) {
        return Math.random() < p;
    }

    // gaussian with mean = 0, stddev = 1
    public static double gaussian() {
        // recall Assignment 0
    }

    // gaussian with given mean and stddev
    public static double gaussian(double mean, double stddev) {
        return mean + (stddev * gaussian());
    }

    ...
}
```

Unit Testing

Unit test. Include `main()` to test each library.

```
public class StdRandom {  
    ...  
    public static void main(String[] args) {  
        int N = Integer.parseInt(args[0]);  
        double[] t = { .5, .3, .1, .1 };  
        for (int i = 0; i < N; i++) {  
            StdOut.printf("%2d ", uniform(100));  
            StdOut.printf("%8.5f ", uniform(10.0, 99.0));  
            StdOut.printf("%5b ", bernoulli(.5));  
            StdOut.printf("%7.5f ", gaussian(9.0, .2));  
            StdOut.printf("%2d ", discrete(t));  
            StdOut.println();  
        }  
    }  
}
```

```
% java StdRandom 5  
61 21.76541 true 9.30910 0  
57 43.64327 false 9.42369 3  
31 30.86201 true 9.06366 0  
92 39.59314 true 9.00896 0  
36 28.27256 false 8.66800 1
```


6

Using a Library

```
public class RandomPoints {  
    public static void main(String args[]) {  
        int N = Integer.parseInt(args[0]);  
        for (int i = 0; i < N; i++) {  
            double x = StdRandom.gaussian(0.5, 0.2);  
            double y = StdRandom.gaussian(0.5, 0.2);  
            StdDraw.point(x, y);  
        }  
    }  
}
```

% javac RandomPoints.java
% java RandomPoints 10000

use library name to invoke method



7

Statistics

Standard Statistics

Ex. Library to compute statistics on an array of real numbers.

```
public class StdStats  
    double max(double[] a)           largest value  
    double min(double[] a)           smallest value  
    double mean(double[] a)          average  
    double var(double[] a)           sample variance  
    double stddev(double[] a)        sample standard deviation  
    double median(double[] a)        median  
    void plotPoints(double[] a)      plot points at (i, a[i])  
    void plotLines(double[] a)       plot lines connecting points at (i, a[i])  
    void plotBars(double[] a)        plot bars to points at (i, a[i])
```

$$\mu = \frac{a_0 + a_1 + \dots + a_{n-1}}{n}, \quad \sigma^2 = \frac{(a_0 - \mu)^2 + (a_1 - \mu)^2 + \dots + (a_{n-1} - \mu)^2}{n-1}$$

mean *sample variance*

9

Ex. Library to compute statistics on an array of real numbers.

```
public class StdStats {
    public static double max(double[] a) {
        double max = Double.NEGATIVE_INFINITY;
        for (int i = 0; i < a.length; i++)
            if (a[i] > max) max = a[i];
        return max;
    }

    public static double mean(double[] a) {
        double sum = 0.0;
        for (int i = 0; i < a.length; i++)
            sum = sum + a[i];
        return sum / a.length;
    }

    public static double stddev(double[] a)
        // see text
    }
}
```

10

Modular Programming


Modular Programming

Modular programming.

- Divide program into self-contained pieces.
- Test each piece individually.
- Combine pieces to make program.

Ex. Flip N coins. How many heads?

- Read arguments from user.
- Flip one fair coin.
- Flip N fair coins and count number of heads.
- Repeat simulation, counting number of times each outcome occurs.
- Plot histogram of empirical results.
- Compare with theoretical predictions.



12

Bernoulli Trials

```
public class Bernoulli {
    public static int binomial(int N) {
        int heads = 0;
        for (int j = 0; j < N; j++)
            if (StdRandom.bernoulli(0.5)) heads++;
        return heads;
    }

    public static void main(String[] args) {
        int N = Integer.parseInt(args[0]);
        int T = Integer.parseInt(args[1]);

        int[] freq = new int[N+1];
        for (int i = 0; i < T; i++)
            freq[binomial(N)]++;

        double[] normalized = new double[N+1];
        for (int i = 0; i <= N; i++)
            normalized[i] = (double) freq[i] / T;
        StdStats.plotBars(normalized);

        double mean = N / 2.0, stddev = Math.sqrt(N) / 2.0;
        double[] phi = new double[N+1];
        for (int i = 0; i <= N; i++)
            phi[i] = Gaussian.phi(i, mean, stddev);
        StdStats.plotLines(phi);
    }
}
```

flip N fair coins;
return # heads

perform T trials
of N coin flips each


plot histogram
of number of heads

theoretical prediction

13

Dependency Graph

Modular programming. Build relatively complicated program by combining several small, independent, modules.

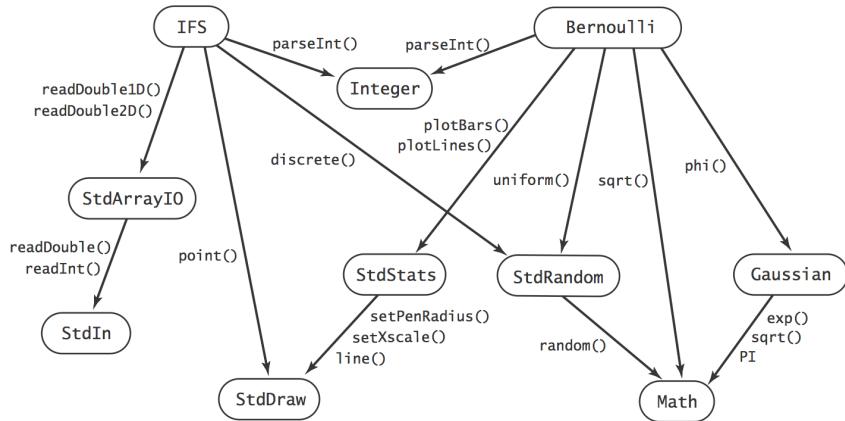

Libraries

Why use libraries?

- Makes code easier to understand.
- Makes code easier to debug.
- Makes code easier to maintain and improve.
- Makes code easier to reuse.