


4.1 UNDIRECTED GRAPHS

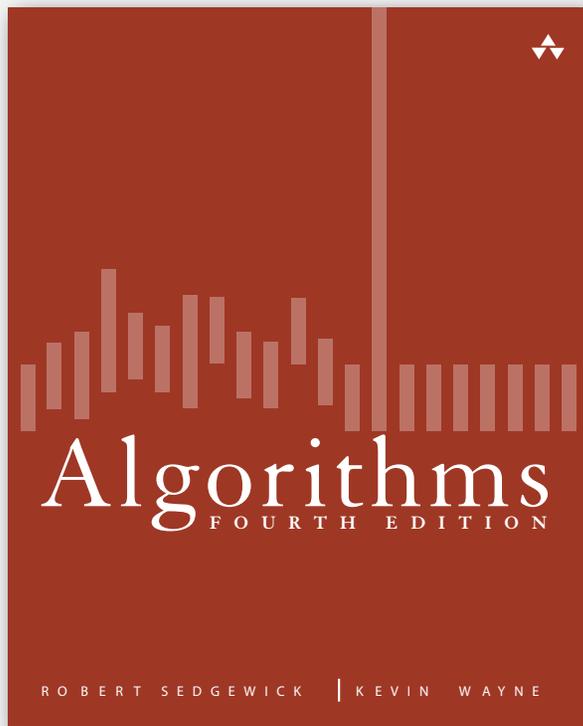



- ▶ graph API
- ▶ depth-first search
- ▶ breadth-first search
- ▶ connected components
- ▶ challenges

Undirected graphs


Graph. Set of **vertices** connected pairwise by **edges**.

Why study graph algorithms?

- Interesting and broadly useful abstraction.
- Challenging branch of computer science and discrete math.
- Hundreds of graph algorithms known.
- Thousands of practical applications.

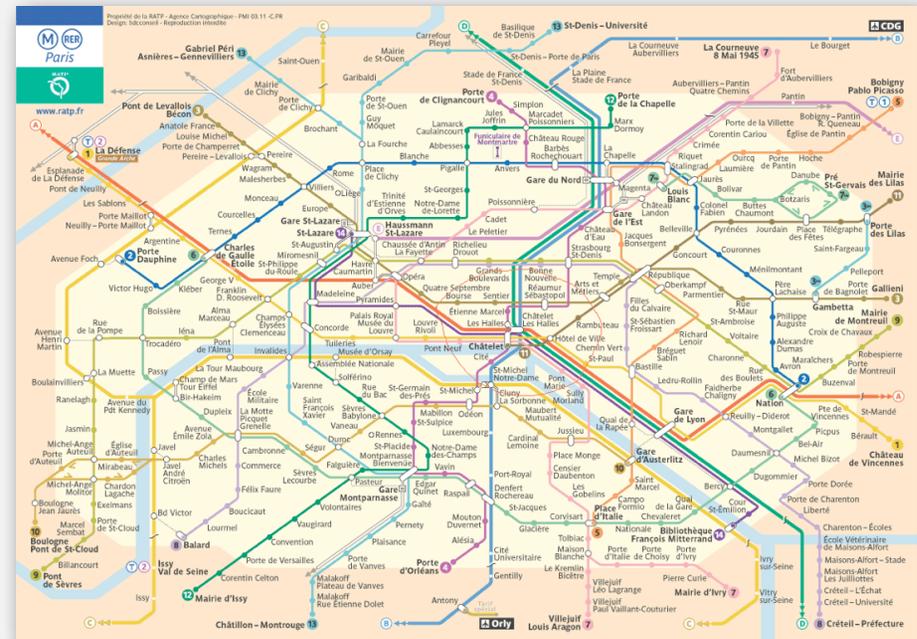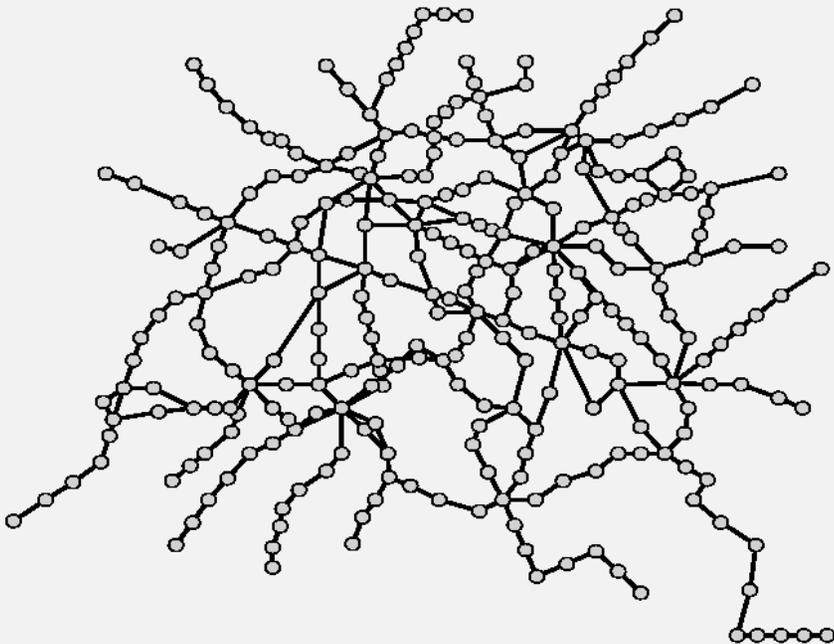

Protein-protein interaction network

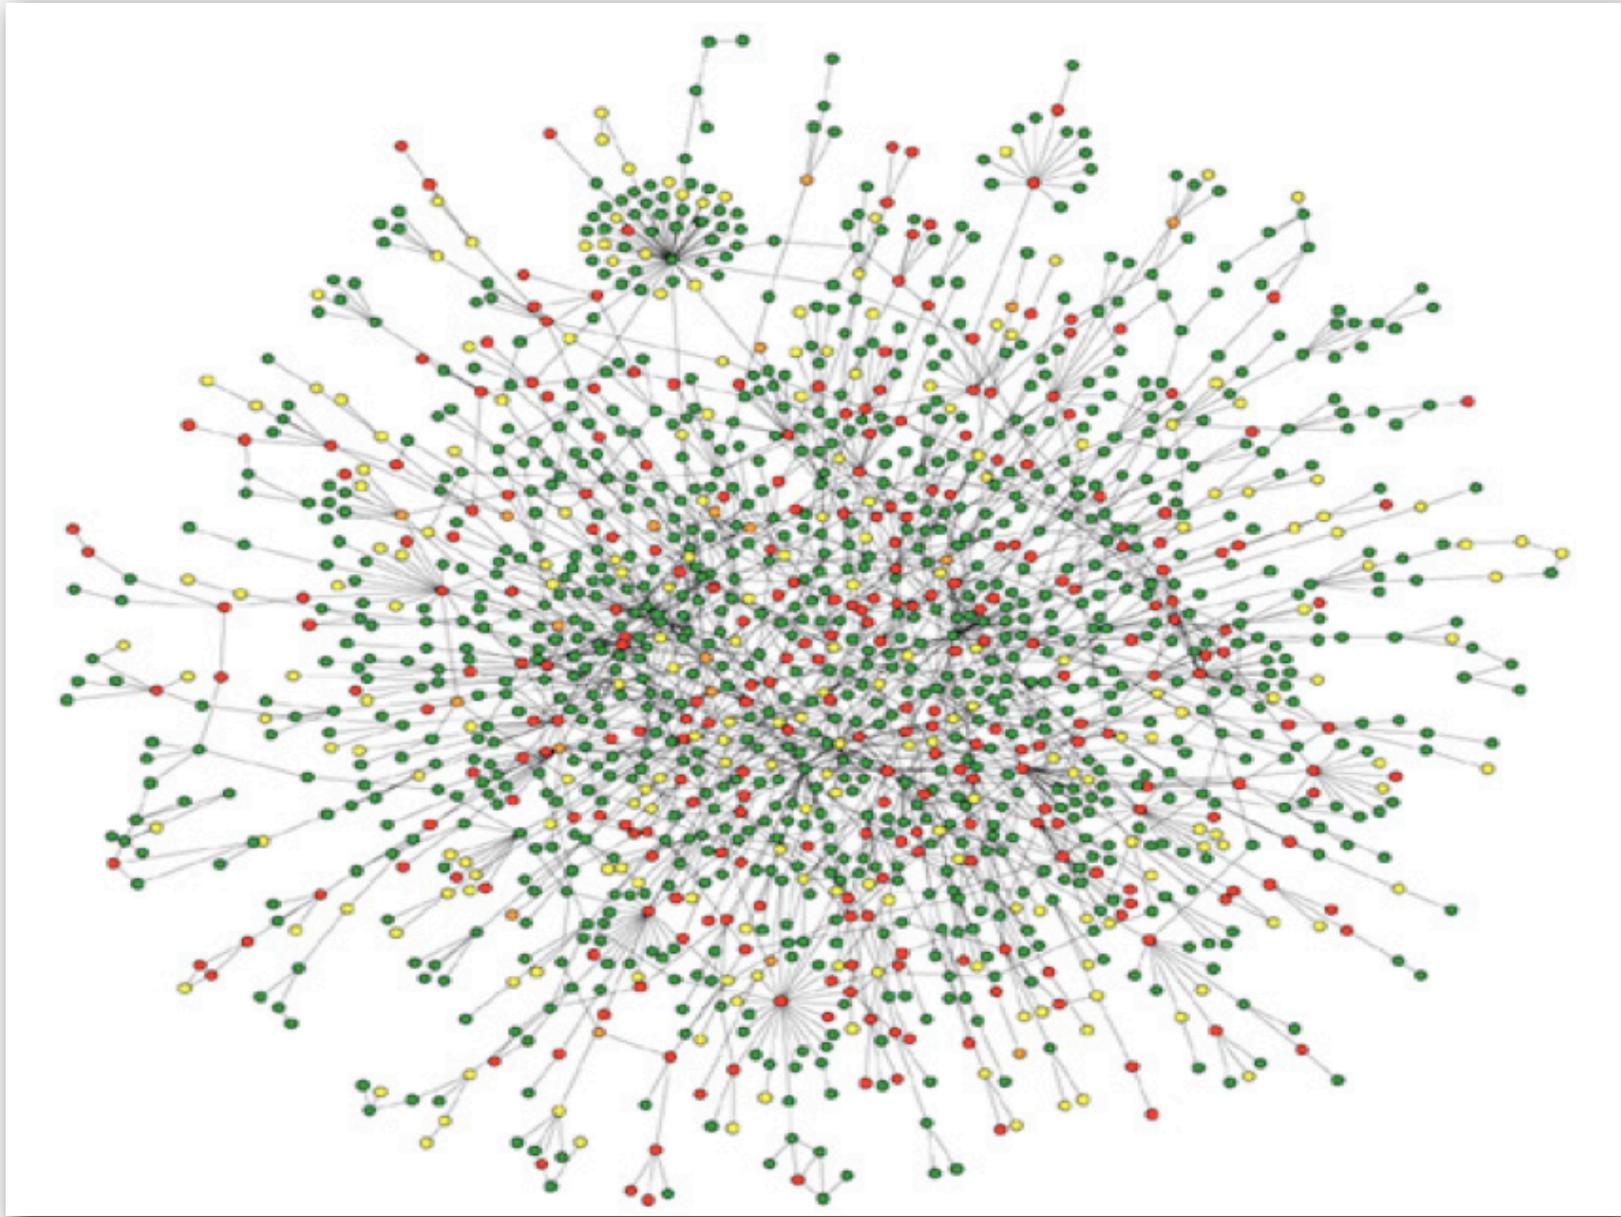


Reference: Jeong et al, Nature Review | Genetics

10 million Facebook friends




"Visualizing Friendships" by Paul Butler

One week of Enron emails

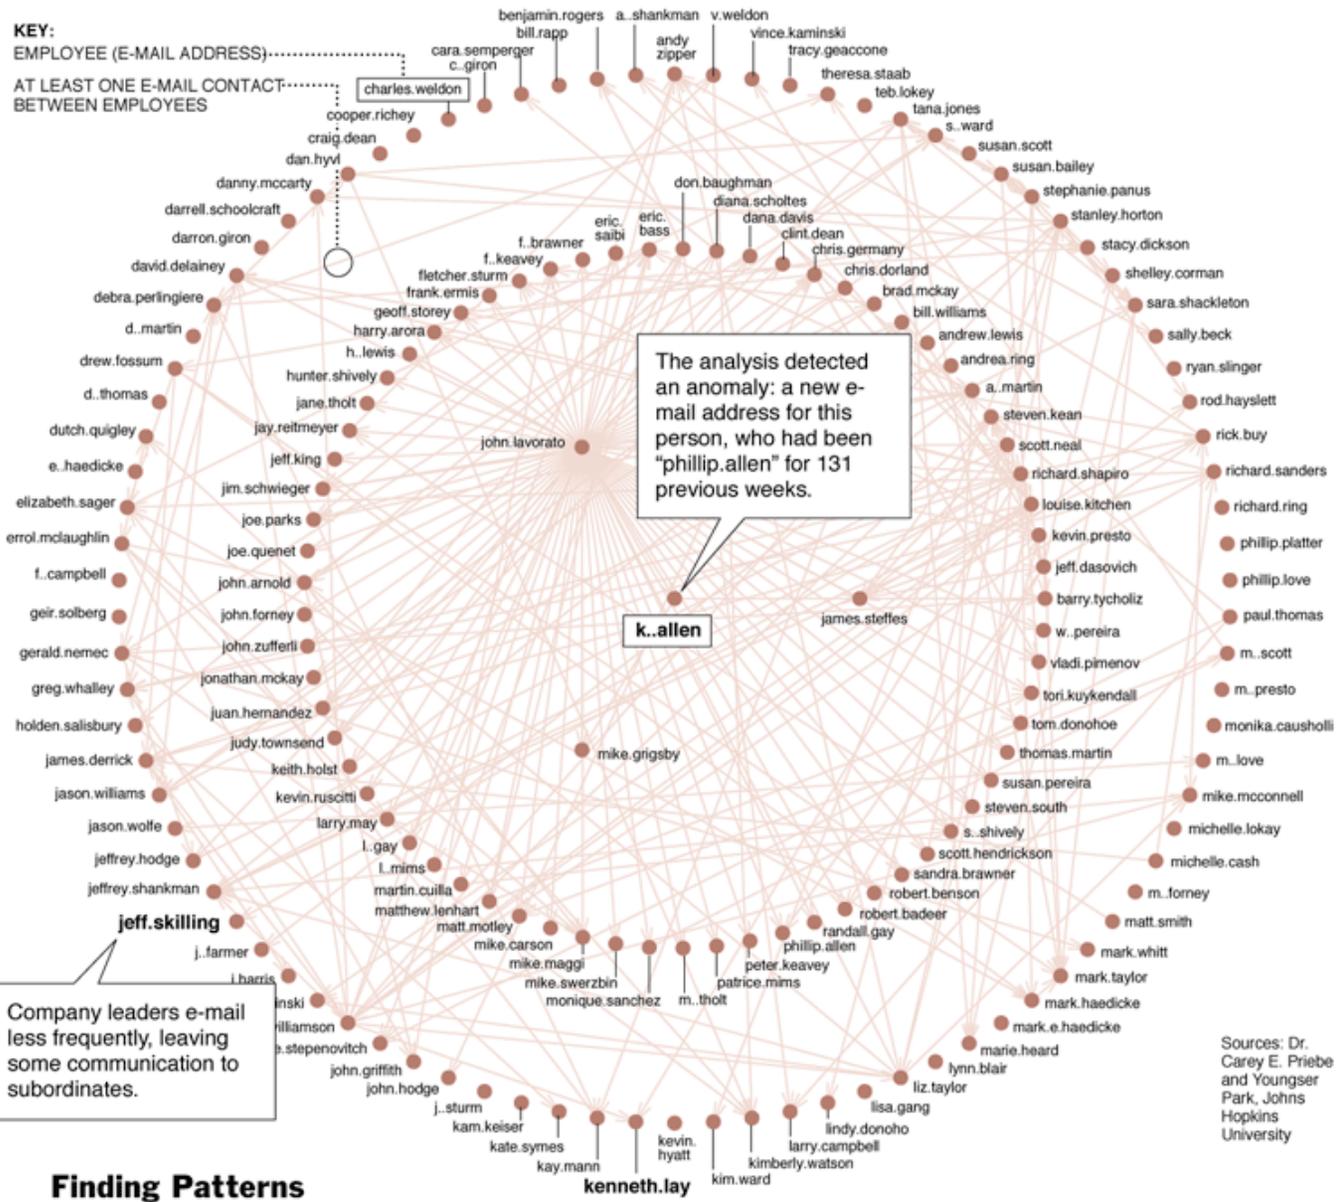

The evolution of FCC lobbying coalitions

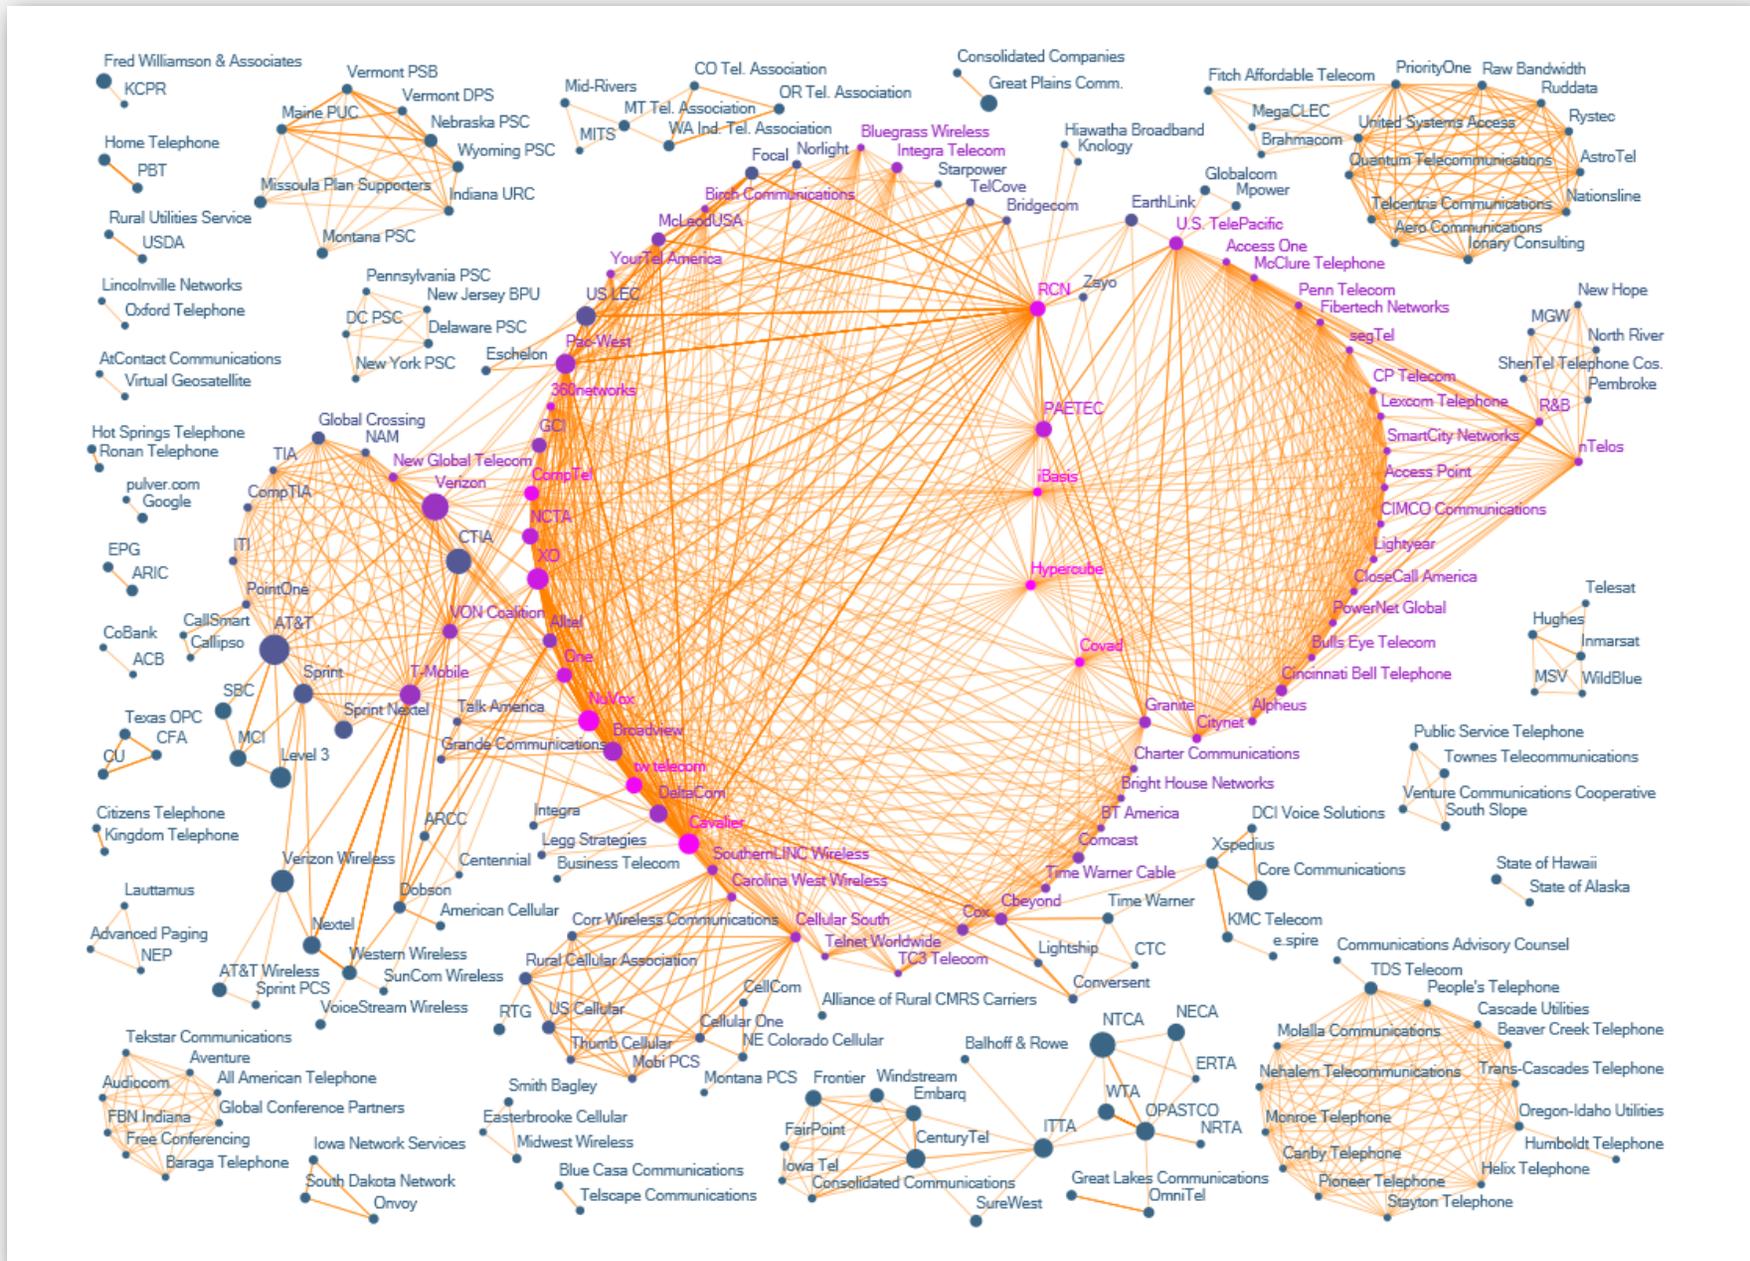

"The Evolution of FCC Lobbying Coalitions" by Pierre de Vries in JoSS Visualization Symposium 2010

Framingham heart study

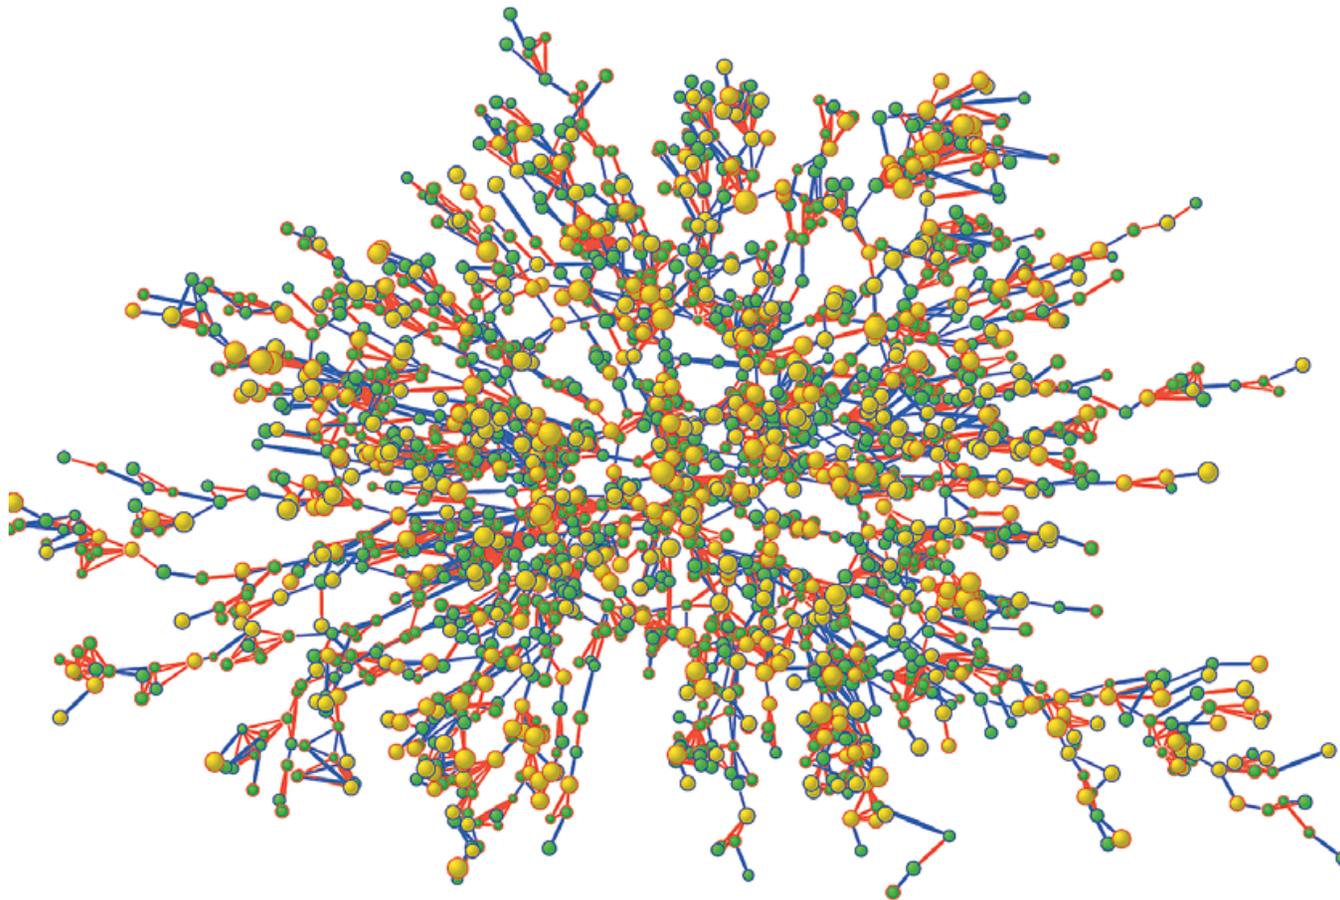


Figure 1. Largest Connected Subcomponent of the Social Network in the Framingham Heart Study in the Year 2000.

Each circle (node) represents one person in the data set. There are 2200 persons in this subcomponent of the social network. Circles with red borders denote women, and circles with blue borders denote men. The size of each circle is proportional to the person's body-mass index. The interior color of the circles indicates the person's obesity status: yellow denotes an obese person (body-mass index, ≥ 30) and green denotes a nonobese person. The colors of the ties between the nodes indicate the relationship between them: purple denotes a friendship or marital tie and orange denotes a familial tie.

Graph applications


graph	vertex	edge
communication	telephone, computer	fiber optic cable
circuit	gate, register, processor	wire
mechanical	joint	rod, beam, spring
financial	stock, currency	transactions
transportation	street intersection, airport	highway, airway route
internet	class C network	connection
game	board position	legal move
social relationship	person, actor	friendship, movie cast
neural network	neuron	synapse
protein network	protein	protein-protein interaction
chemical compound	molecule	bond

Graph terminology

Path. Sequence of vertices connected by edges.

Cycle. Path whose first and last vertices are the same.

Two vertices are **connected** if there is a path between them.

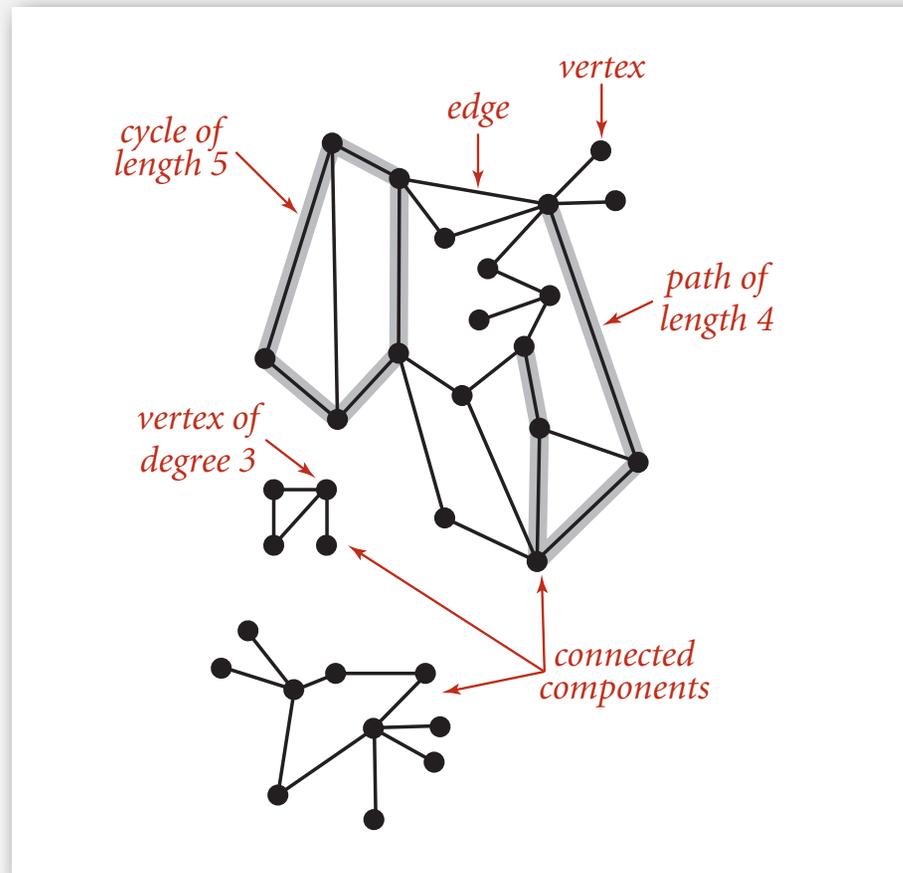

Some graph-processing problems

Path. Is there a path between s and t ?

Shortest path. What is the shortest path between s and t ?

Cycle. Is there a cycle in the graph?

Euler tour. Is there a cycle that uses each edge exactly once?

Hamilton tour. Is there a cycle that uses each vertex exactly once?

Connectivity. Is there a way to connect all of the vertices?

MST. What is the best way to connect all of the vertices?

Biconnectivity. Is there a vertex whose removal disconnects the graph?

Planarity. Can you draw the graph in the plane with no crossing edges?

Graph isomorphism. Do two adjacency lists represent the same graph?


Challenge. Which of these problems are easy? difficult? intractable?

- ▶ **graph API**
- ▶ depth-first search
- ▶ breadth-first search
- ▶ connected components
- ▶ challenges

Graph representation

Graph drawing. Provides intuition about the structure of the graph.

Caveat. Intuition can be misleading.

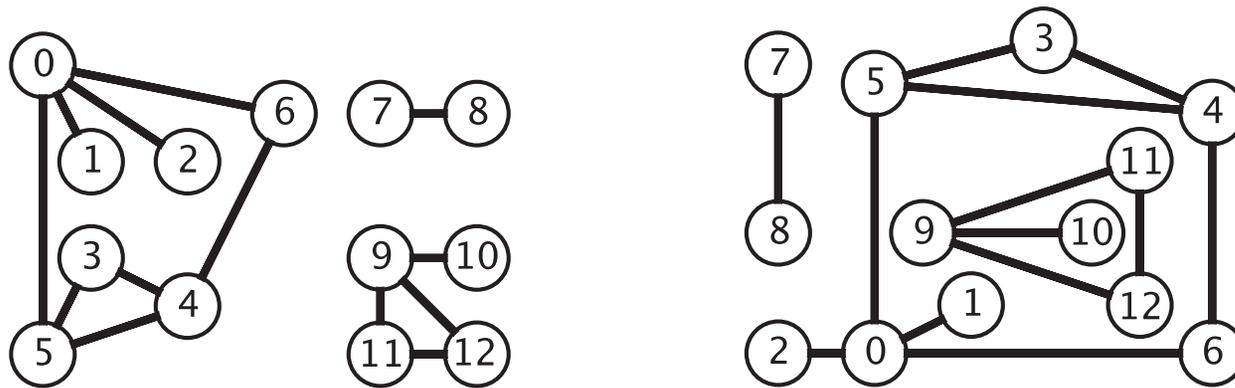


two drawings of the same graph


Graph representation

Vertex representation.

- This lecture: use integers between 0 and $V - 1$.
- Applications: convert between names and integers with symbol table.

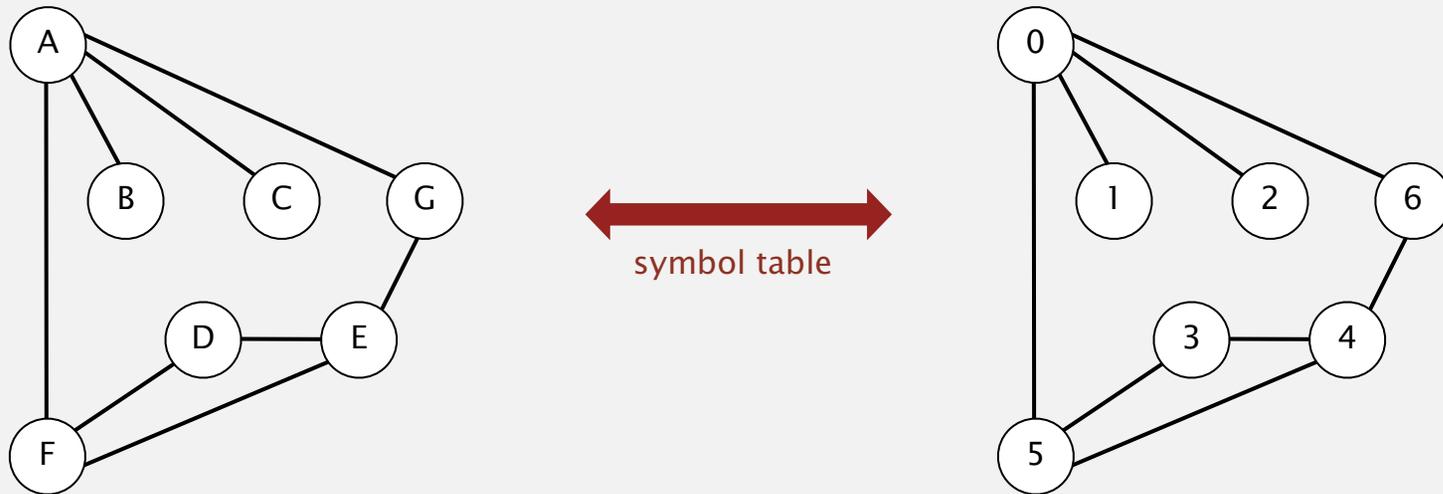

Anomalies.

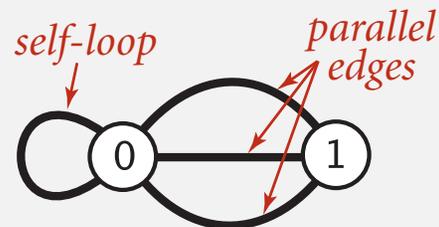

Graph API

<code>public class Graph</code>	
<code>Graph(int V)</code>	<i>create an empty graph with V vertices</i>
<code>Graph(In in)</code>	<i>create a graph from input stream</i>
<code>void addEdge(int v, int w)</code>	<i>add an edge v-w</i>
<code>Iterable<Integer> adj(int v)</code>	<i>vertices adjacent to v</i>
<code>int V()</code>	<i>number of vertices</i>
<code>int E()</code>	<i>number of edges</i>
<code>String toString()</code>	<i>string representation</i>

```
In in = new In(args[0]);
Graph G = new Graph(in);

for (int v = 0; v < G.V(); v++)
    for (int w : G.adj(v))
        StdOut.println(v + "-" + w);
```

← read graph from
input stream


← print out each
edge (twice)

Graph API: sample client

Graph input format.

tinyG.txt

```
V → 13
      13 ← E
0 5
4 3
0 1
9 12
6 4
5 4
0 2
11 12
9 10
0 6
7 8
9 11
5 3
```

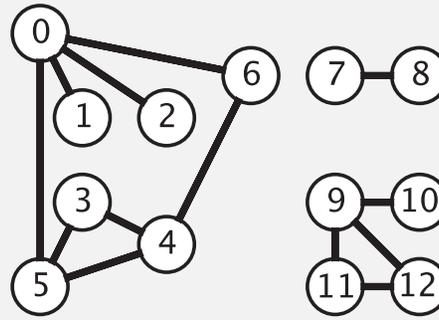

```
% java Test tinyG.txt
0-6
0-2
0-1
0-5
1-0
2-0
3-5
3-4
...
12-11
12-9
```

```
In in = new In(args[0]);
Graph G = new Graph(in);

for (int v = 0; v < G.V(); v++)
    for (int w : G.adj(v))
        StdOut.println(v + "-" + w);
```

← read graph from
input stream

← print out each
edge (twice)

Typical graph-processing code

compute the degree of v

```
public static int degree(Graph G, int v)
{
    int degree = 0;
    for (int w : G.adj(v)) degree++;
    return degree;
}
```

compute maximum degree

```
public static int maxDegree(Graph G)
{
    int max = 0;
    for (int v = 0; v < G.V(); v++)
        if (degree(G, v) > max)
            max = degree(G, v);
    return max;
}
```

compute average degree



```
public static int avgDegree(Graph G)
{
    return 2 * G.E() / G.V();
}
```

count self-loops

```
public static int numberOfSelfLoops(Graph G)
{
    int count = 0;
    for (int v = 0; v < G.V(); v++)
        for (int w : G.adj(v))
            if (v == w) count++;
    return count/2;
}
```

Set-of-edges graph representation

Maintain a list of the edges (linked list or array).


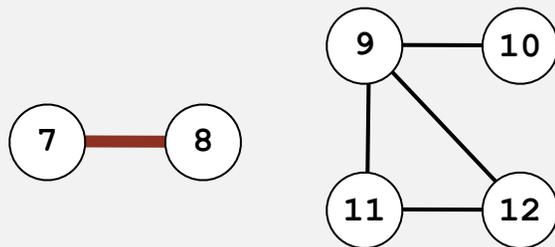
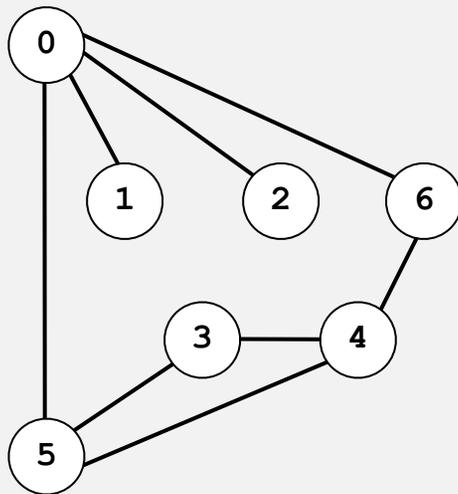


0	1
0	2
0	5
0	6
3	4
3	5
4	5
4	6
7	8
9	10
9	11
9	12
11	12

Adjacency-matrix graph representation

Maintain a two-dimensional V -by- V boolean array;

for each edge $v-w$ in graph: $\text{adj}[v][w] = \text{adj}[w][v] = \text{true}$.

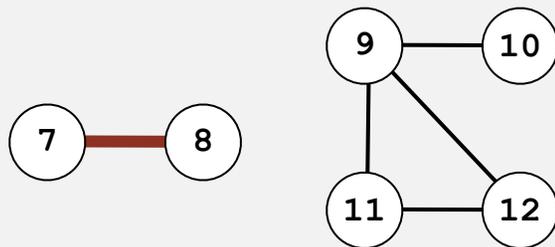
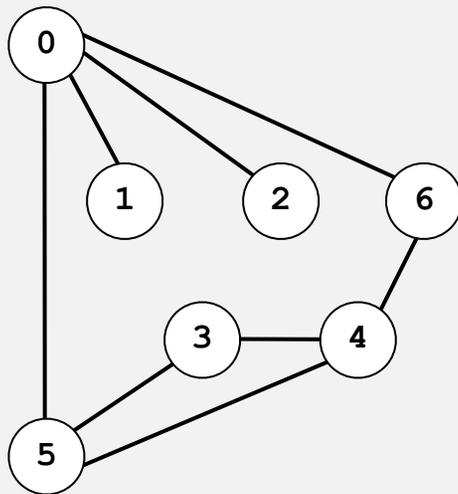


two entries
for each edge

	0	1	2	3	4	5	6	7	8	9	10	11	12
0	0	1	1	0	0	1	1	0	0	0	0	0	0
1	1	0	0	0	0	0	0	0	0	0	0	0	0
2	1	0	0	0	0	0	0	0	0	0	0	0	0
3	0	0	0	0	1	1	0	0	0	0	0	0	0
4	0	0	0	1	0	1	1	0	0	0	0	0	0
5	1	0	0	1	1	0	0	0	0	0	0	0	0
6	1	0	0	0	1	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0	1	0	0	0	0
8	0	0	0	0	0	0	0	1	0	0	0	0	0
9	0	0	0	0	0	0	0	0	0	0	1	1	1
10	0	0	0	0	0	0	0	0	0	1	0	0	0
11	0	0	0	0	0	0	0	0	0	1	0	0	1
12	0	0	0	0	0	0	0	0	0	1	0	1	0

Adjacency-list graph representation

Maintain vertex-indexed array of lists.

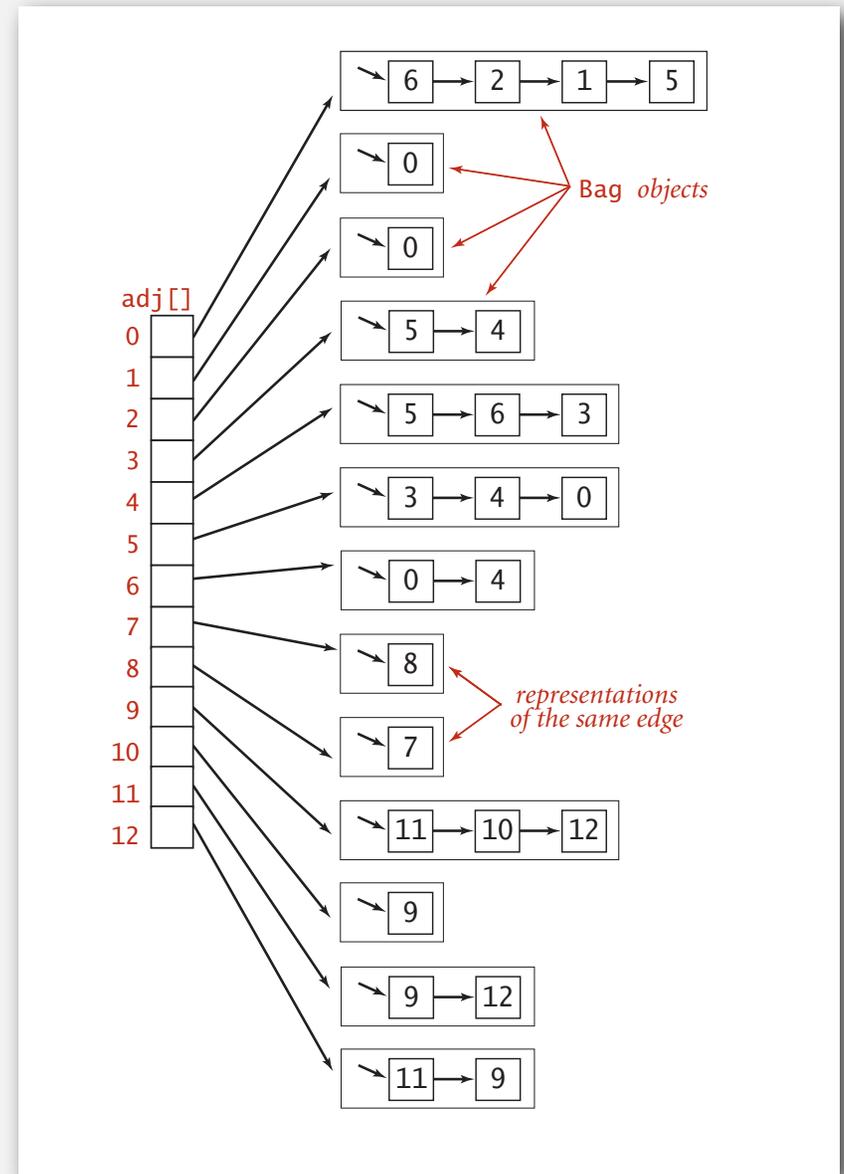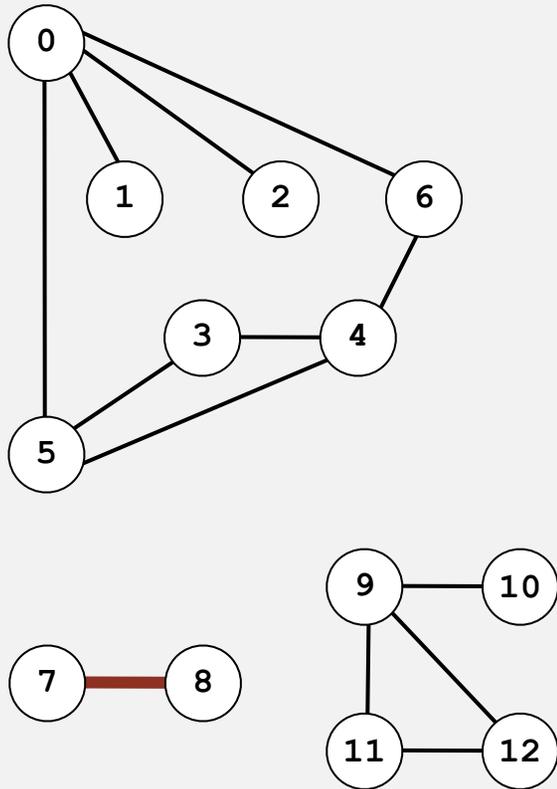

Adjacency-list graph representation: Java implementation

```
public class Graph
```

```
{
```

```
    private final int V;  
    private Bag<Integer>[] adj;
```

← adjacency lists
(using Bag data type)

```
    public Graph(int V)
```

```
    {
```

```
        this.V = V;  
        adj = (Bag<Integer>[]) new Bag[V];  
        for (int v = 0; v < V; v++)  
            adj[v] = new Bag<Integer>();
```

← create empty graph
with v vertices

```
    public void addEdge(int v, int w)
```

```
    {
```

```
        adj[v].add(w);  
        adj[w].add(v);
```

← add edge $v-w$
(parallel edges allowed)

```
    }
```

```
    public Iterable<Integer> adj(int v)
```

```
    { return adj[v]; }
```

← iterator for vertices adjacent to v

```
}
```


Graph representations

In practice. Use adjacency-lists representation.


- Algorithms based on iterating over vertices adjacent to v .
- Real-world graphs tend to be "sparse."

huge number of vertices,
small average vertex degree

sparse ($E = 200$)

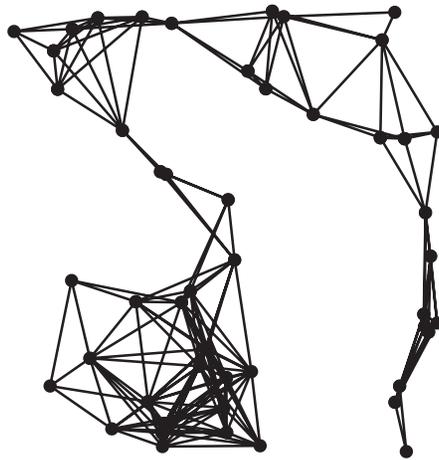

dense ($E = 1000$)

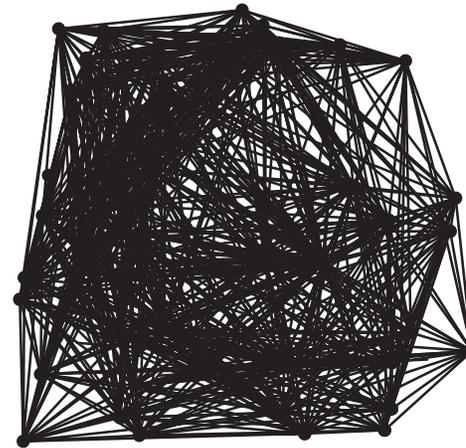

Two graphs ($V = 50$)

Graph representations

In practice. Use adjacency-lists representation.

- Algorithms based on iterating over vertices adjacent to v .
- Real-world graphs tend to be "sparse."

huge number of vertices,
small average vertex degree

representation	space	add edge	edge between v and w ?	iterate over vertices adjacent to v ?
list of edges	E	1	E	E
adjacency matrix	V^2	1 *	1	V
adjacency lists	$E + V$	1	degree(v)	degree(v)


* disallows parallel edges

- ▶ graph API
- ▶ **depth-first search**
- ▶ breadth-first search
- ▶ connected components
- ▶ challenges

Maze exploration

Maze graphs.

- Vertex = intersection.
- Edge = passage.

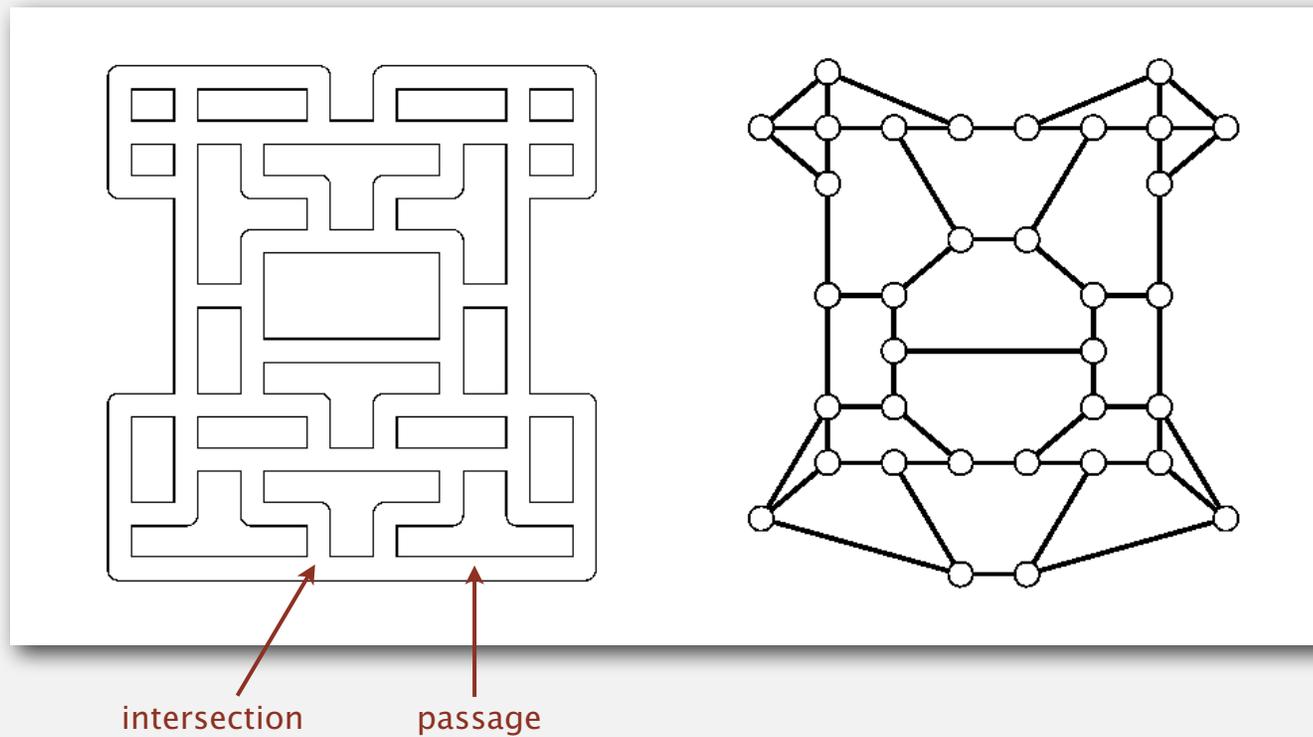


Goal. Explore every intersection in the maze.

Trémaux maze exploration

Algorithm.

- Unroll a ball of string behind you.
- Mark each visited intersection and each visited passage.
- Retrace steps when no unvisited options.

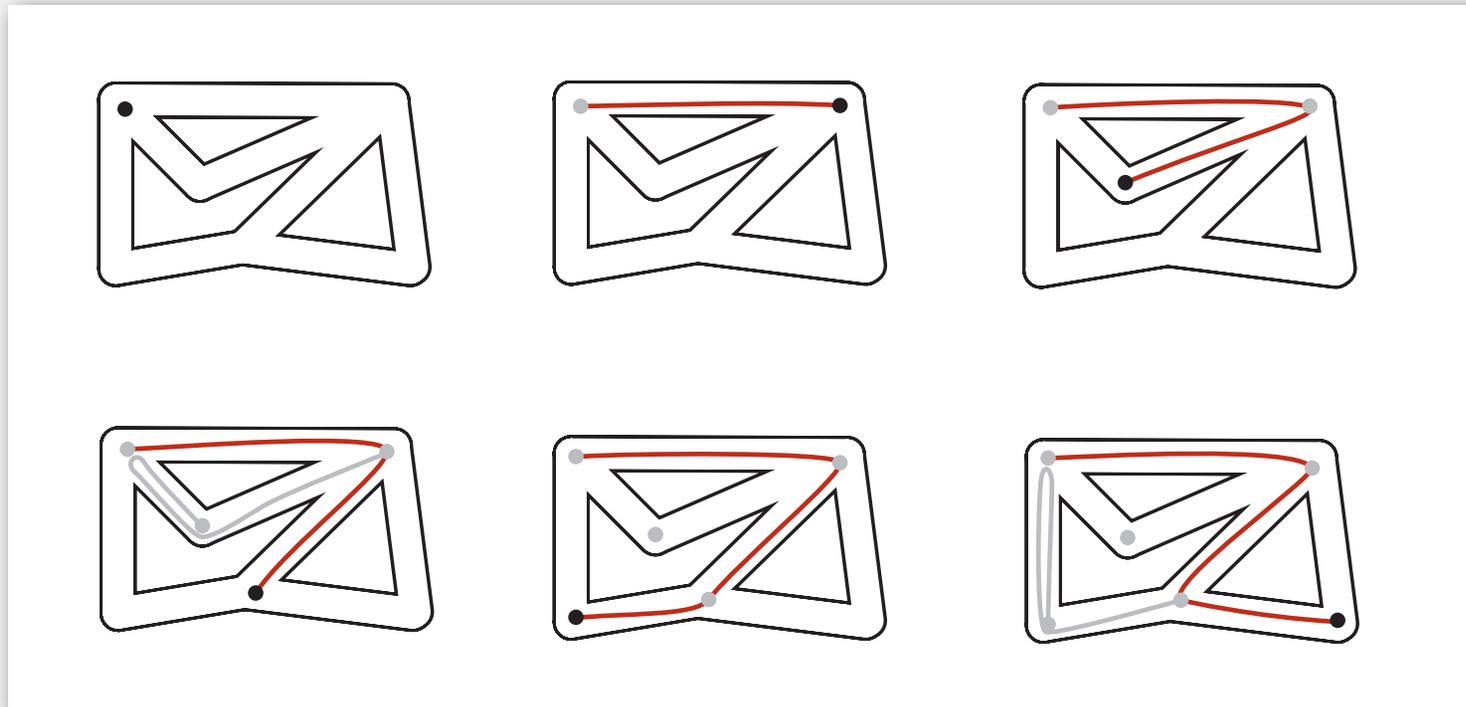

Trémaux maze exploration

Algorithm.


- Unroll a ball of string behind you.
- Mark each visited intersection and each visited passage.
- Retrace steps when no unvisited options.

First use? Theseus entered labyrinth to kill the monstrous Minotaur; Ariadne held ball of string.




Claude Shannon (with Theseus mouse)

Maze exploration

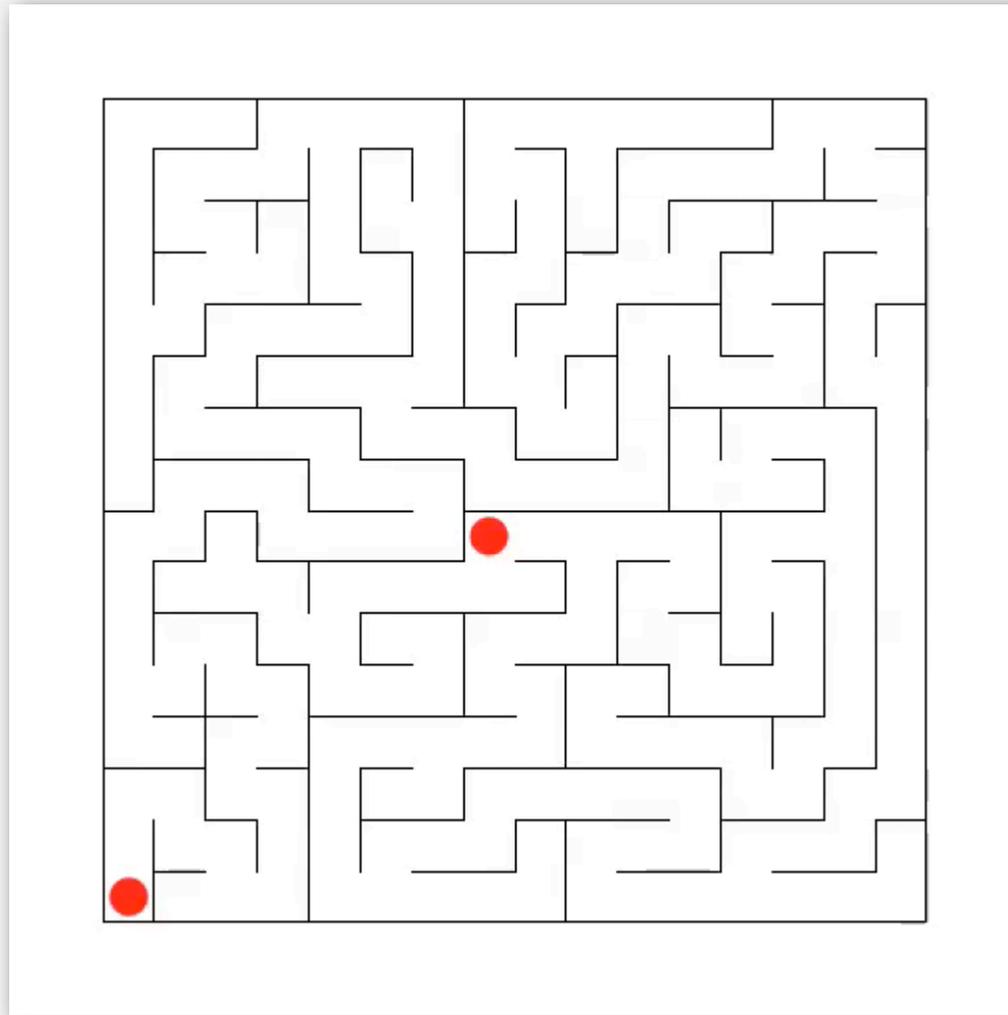

Maze exploration

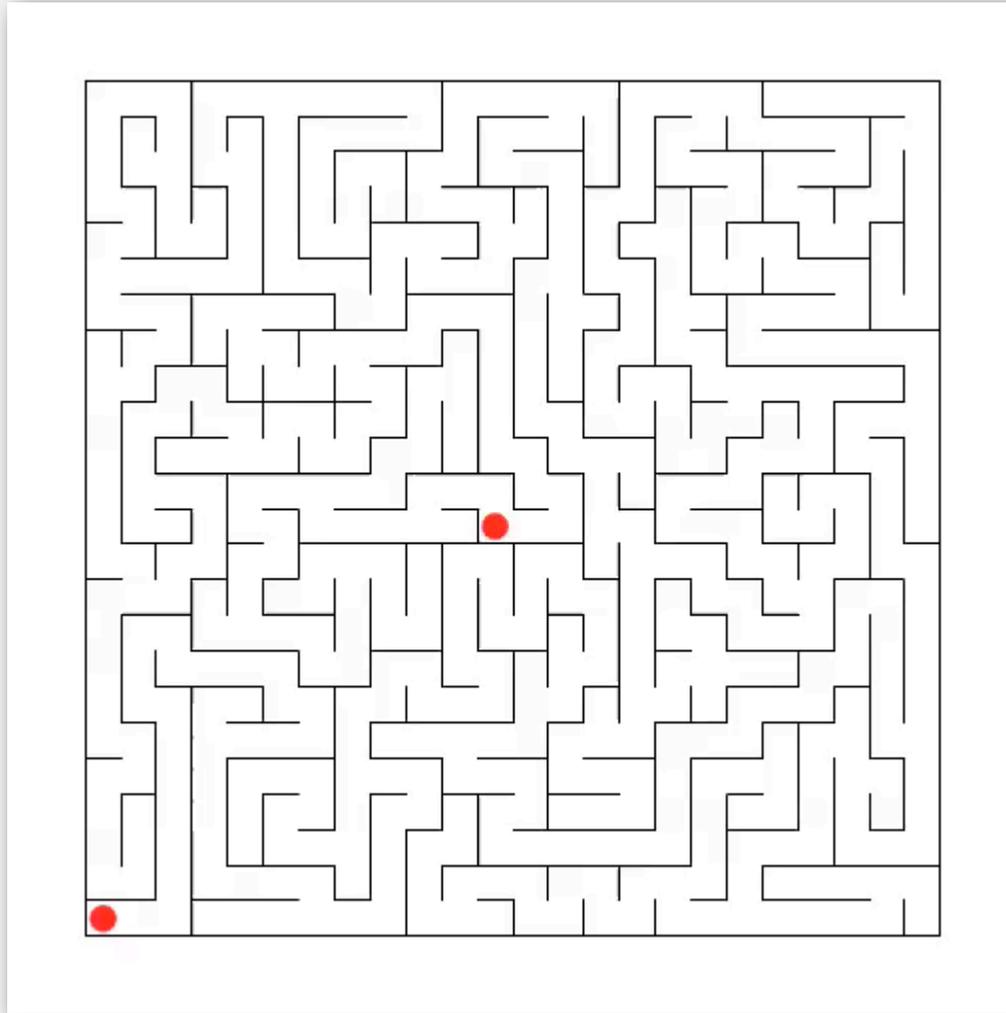

Depth-first search

Goal. Systematically search through a graph.

Idea. Mimic maze exploration.

DFS (to visit a vertex v)

Mark v as visited.

Recursively visit all unmarked
vertices w adjacent to v .

Typical applications. [ahead]

- Find all vertices connected to a given source vertex.
- Find a path between two vertices.

Design pattern for graph processing

Design pattern. Decouple graph data type from graph processing.

```
public class Search
```

```
    Search(Graph G, int s)           find vertices connected to s
```

```
    boolean marked(int v)           is vertex v connected to s?
```

```
    int count()                     how many vertices connected to s?
```

Typical client program.

- Create a Graph.
- Pass the Graph to a graph-processing routine, e.g., Search.
- Query the graph-processing routine for information.

```
Search search = new Search(G, s);  
for (int v = 0; v < G.V(); v++)  
    if (search.marked(v))  
        StdOut.println(v);
```

← print all vertices
connected to s

Depth-first search (warmup)

Goal. Find all vertices connected to *s*.


Idea. Mimic maze exploration.

Algorithm.

- Use recursion (ball of string).
- Mark each visited vertex.
- Return (retrace steps) when no unvisited options.

Data structure.

- `boolean[] marked` to mark visited vertices.

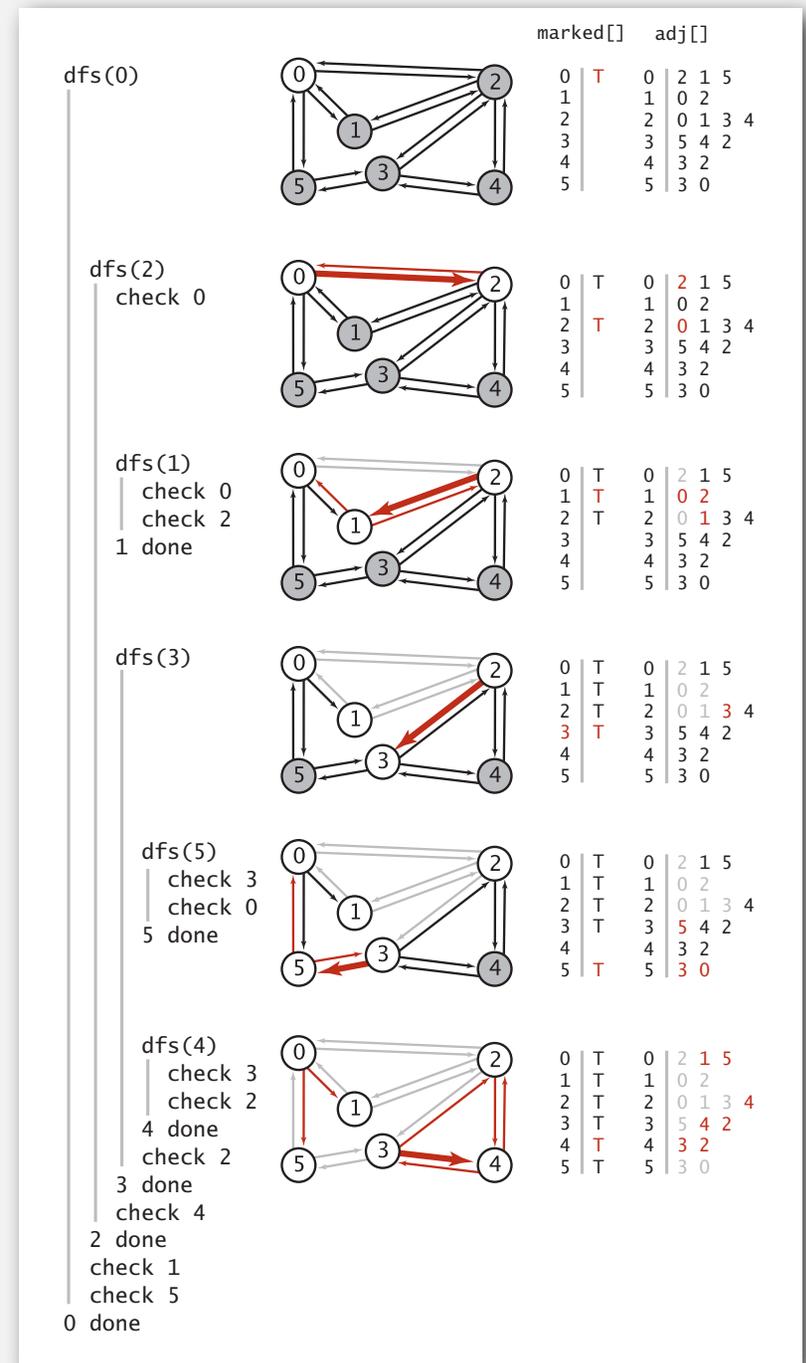

Depth-first search (warmup)

```
public class DepthFirstSearch
```

```
{
```

```
    private boolean[] marked;
```

marked[v] = true
if v connected to s

```
    public DepthFirstSearch(Graph G, int s)
```

```
    {
```

```
        marked = new boolean[G.V()];
```

```
        dfs(G, s);
```

constructor marks
vertices connected to s

```
    }
```

```
    private void dfs(Graph G, int v)
```

```
    {
```

```
        marked[v] = true;
```

```
        for (int w : G.adj(v))
```

```
            if (!marked[w])
```

```
                dfs(G, w);
```

recursive DFS does the work

```
    }
```

```
    public boolean marked(int v)
```

```
    { return marked[v]; }
```

client can ask whether
vertex v is connected to s


```
}
```

Depth-first search properties


Proposition. DFS marks all vertices connected to s in time proportional to the sum of their degrees.

Pf.

- **Correctness:**
 - if w marked, then w connected to s (why?)
 - if w connected to s , then w marked (if w unmarked, then consider last edge on a path from s to w that goes from a marked vertex to an unmarked one)
- **Running time:** each vertex connected to s is visited once.

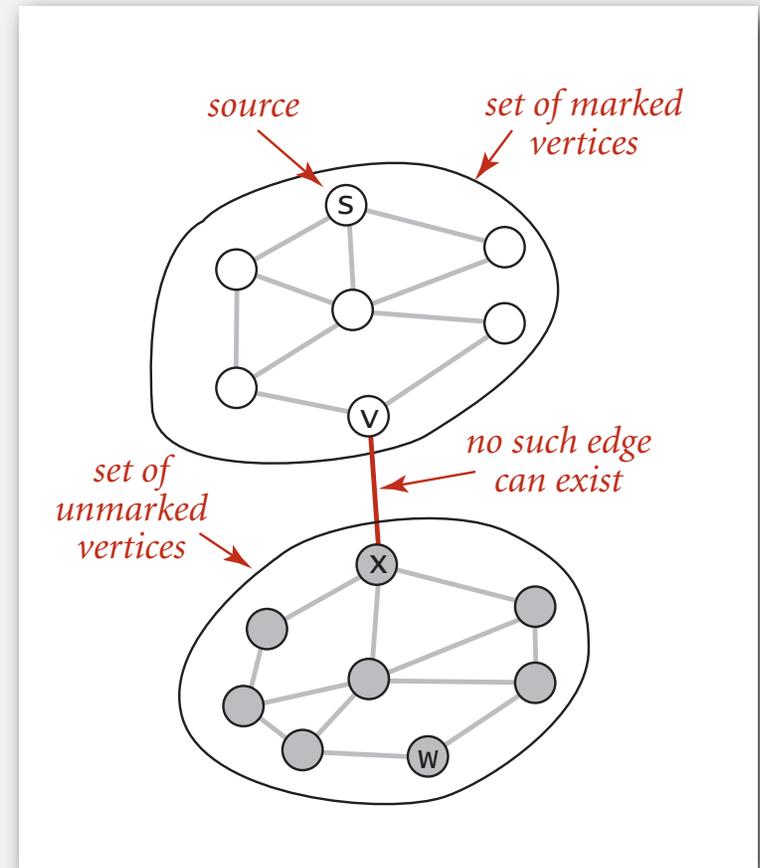

Depth-first search application: preparing for a date

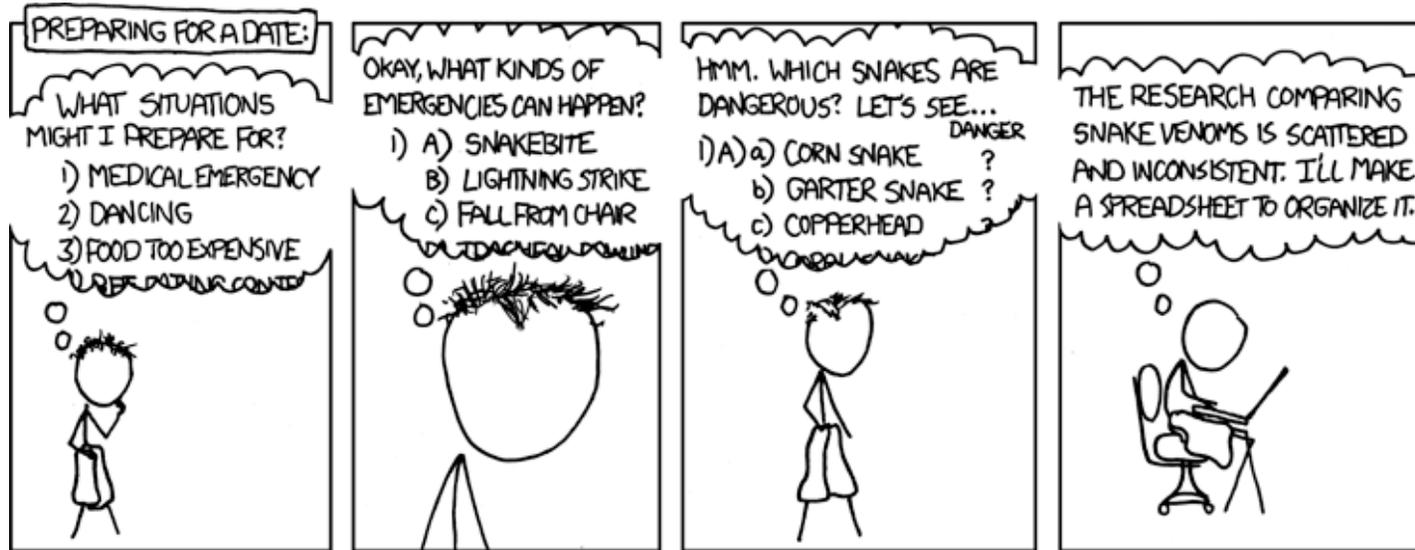

I REALLY NEED TO STOP USING DEPTH-FIRST SEARCHES.

xkcd

<http://xkcd.com/761/>

Depth-first search application: flood fill

Challenge. Flood fill (Photoshop magic wand).

Assumptions. Picture has millions to billions of pixels.




Depth-first search application: flood fill


Change color of entire blob of neighboring **red** pixels to **blue**.

Build a **grid graph**.

- Vertex: pixel.
- Edge: between two adjacent red pixels.
- Blob: all pixels connected to given pixel.

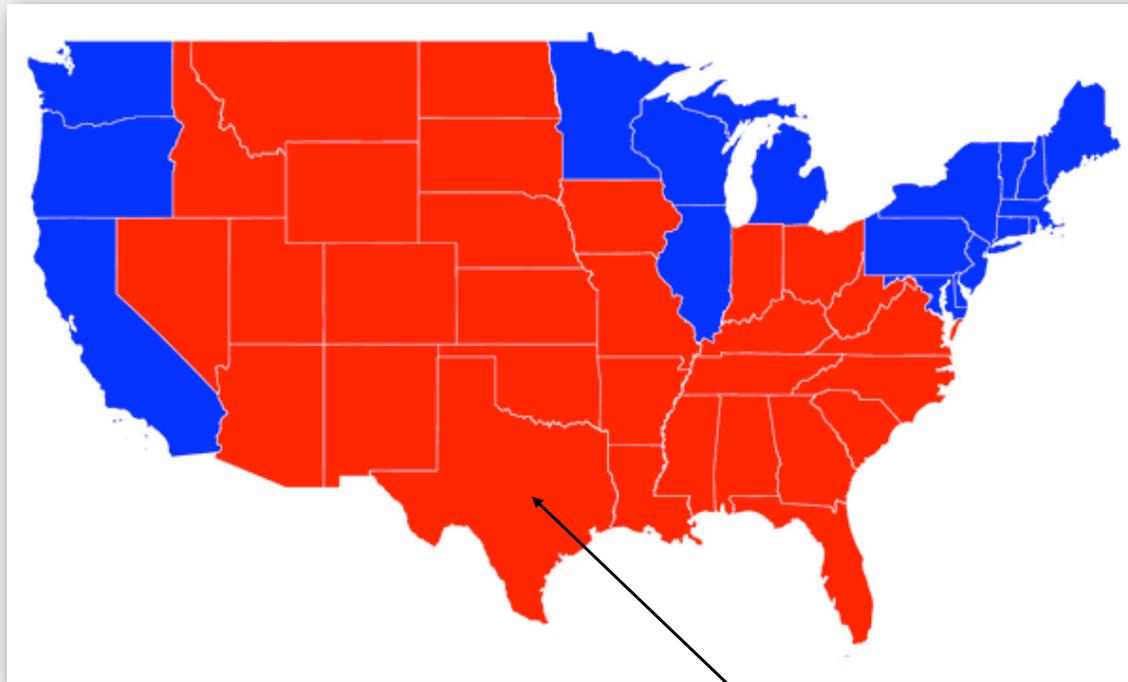

recolor red blob to blue

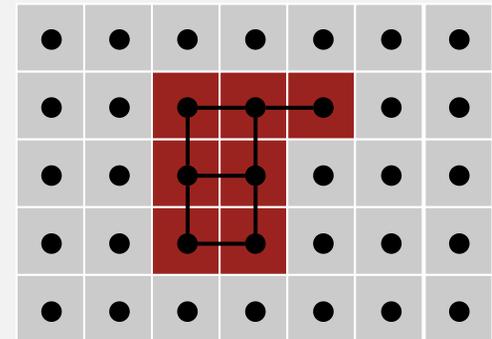


Depth-first search application: flood fill


Change color of entire blob of neighboring **red** pixels to **blue**.

Build a **grid graph**.

- Vertex: pixel.
- Edge: between two adjacent red pixels.
- Blob: all pixels connected to given pixel.

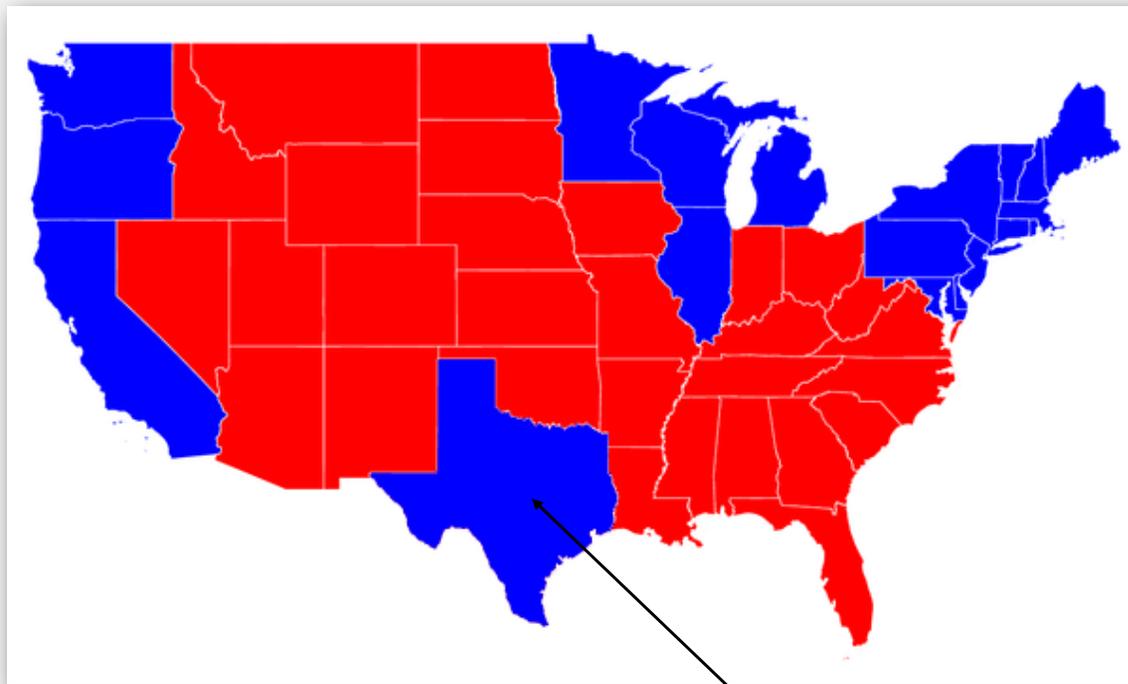


recolor red blob to blue

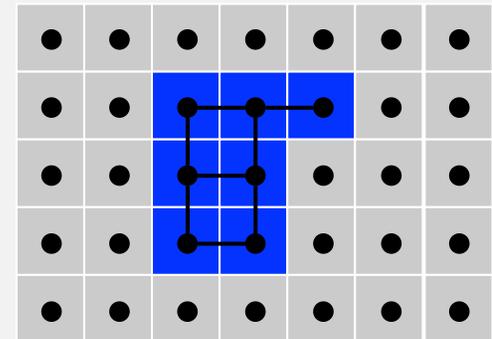

Paths in graphs

Goal. Does there **exist** a path from s to t ?

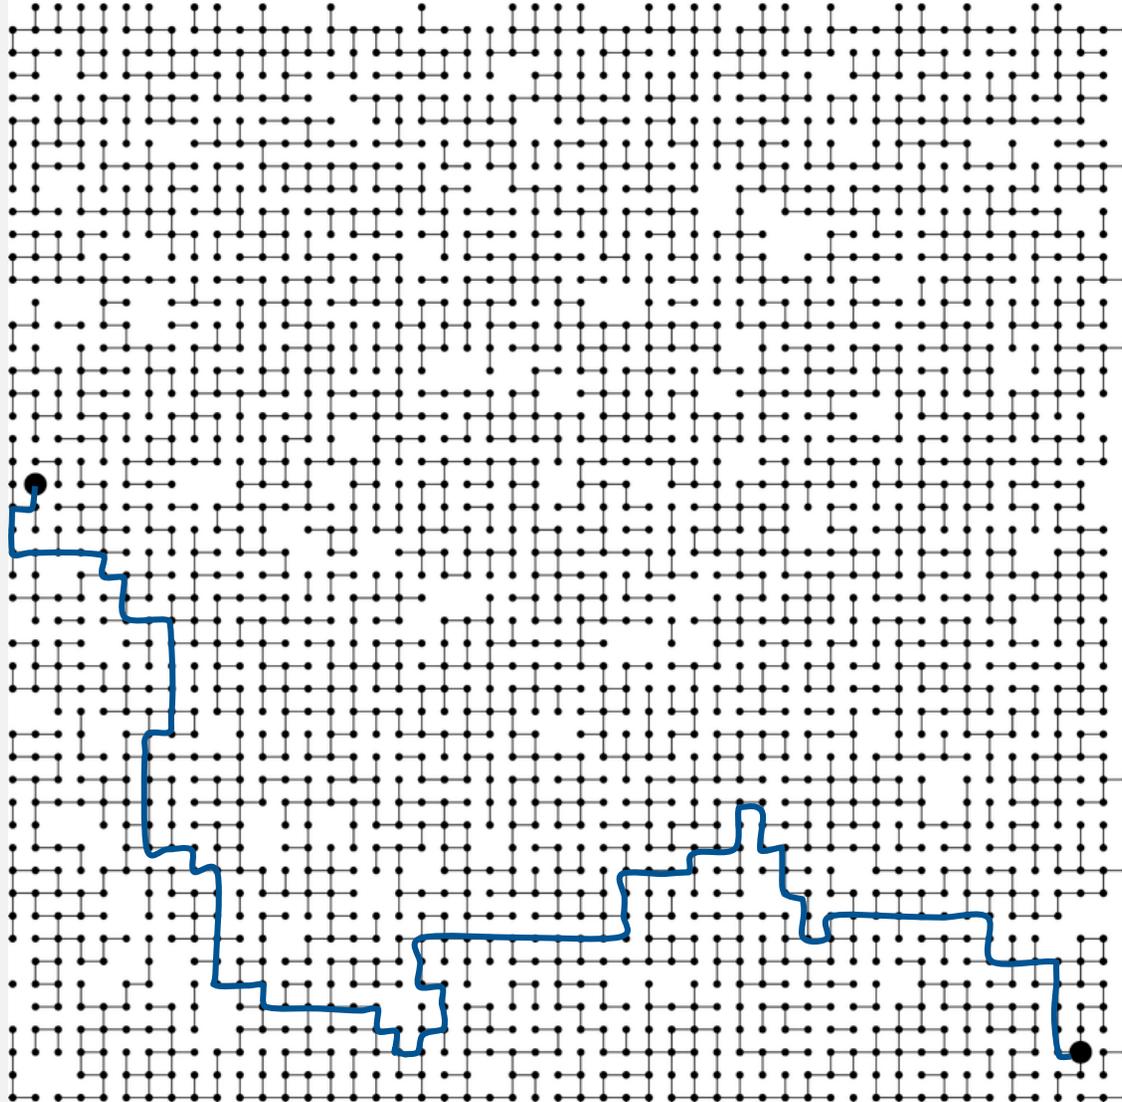

Paths in graphs: union-find vs. DFS

Goal. Does there **exist** a path from s to t ?


method	preprocessing time	query time	space
union-find	$V + E \log^* V$	$\log^* V$ †	V
DFS	$E + V$	1	$E + V$

Union-find. Can intermix connected queries and edge insertions.

Depth-first search. Constant time per query.

Pathfinding in graphs

Goal. Does there exist a path from s to t ? If yes, **find** any such path.

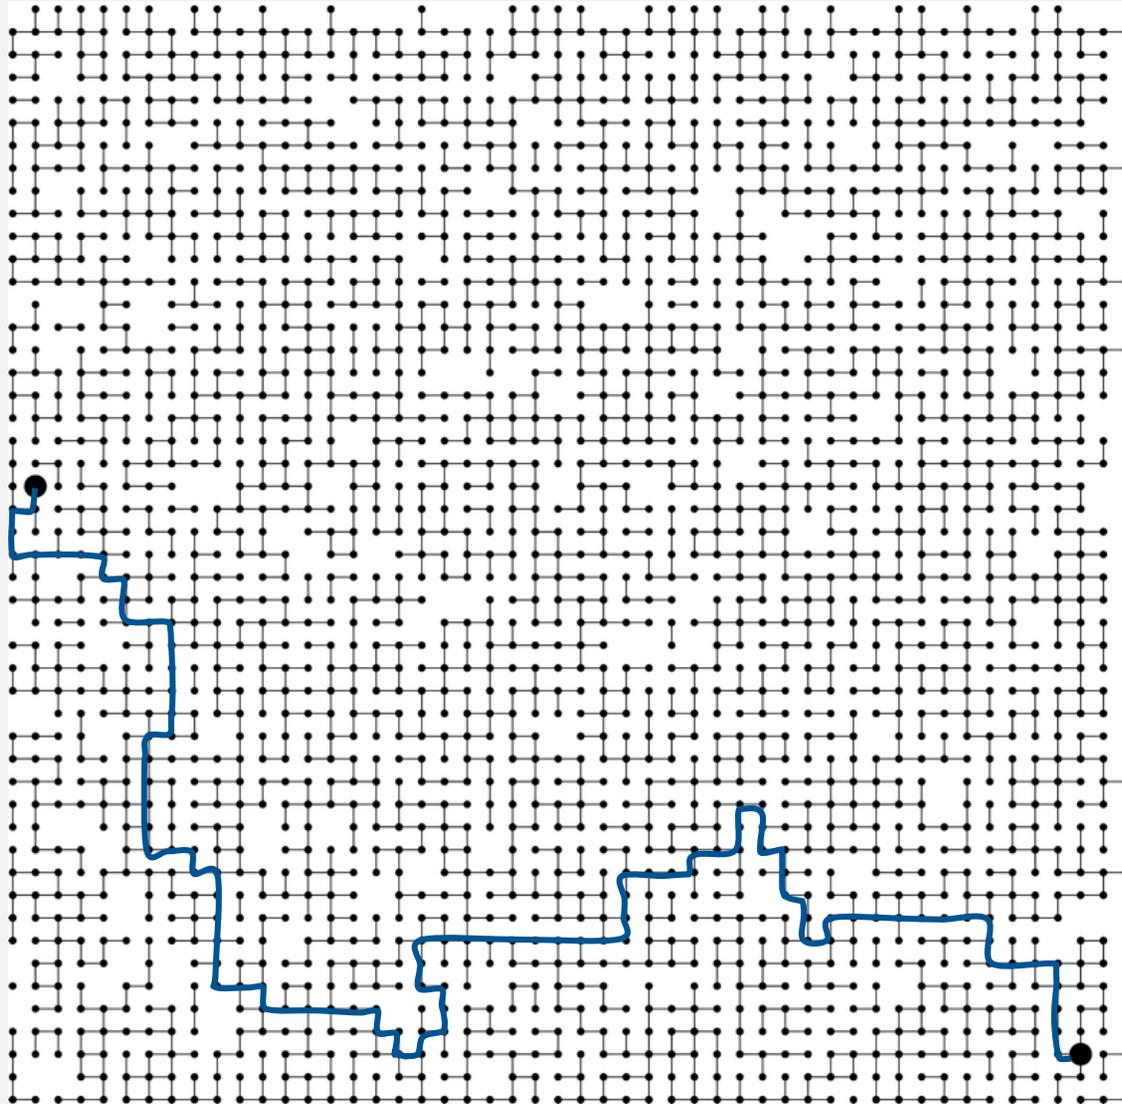

Pathfinding in graphs

Goal. Does there exist a path from s to t ? If yes, **find** any such path.

```
public class Paths
    Paths(Graph G, int s)           find paths in G from source s
    boolean hasPathTo(int v)       is there a path from s to v?
    Iterable<Integer> pathTo(int v) path from s to v; null if no such path
```

Union-find. Not much help.

Depth-first search. After linear-time preprocessing, can recover path itself in time proportional to its length.

easy modification
(stay tuned)



Depth-first search (pathfinding)

Goal. Find **paths** to all vertices connected to a given source s .


Idea. Mimic maze exploration.

Algorithm.

- Use recursion (ball of string).
- Mark each visited vertex **by keeping**
- **track of edge taken to visit it.**
- Return (retrace steps) when no unvisited options.

Data structures.

- `boolean[] marked` to mark visited vertices.
- `int[] edgeTo` to keep tree of paths.
- $(\text{edgeTo}[w] == v)$ means that edge $v-w$ was taken to visit w the first time

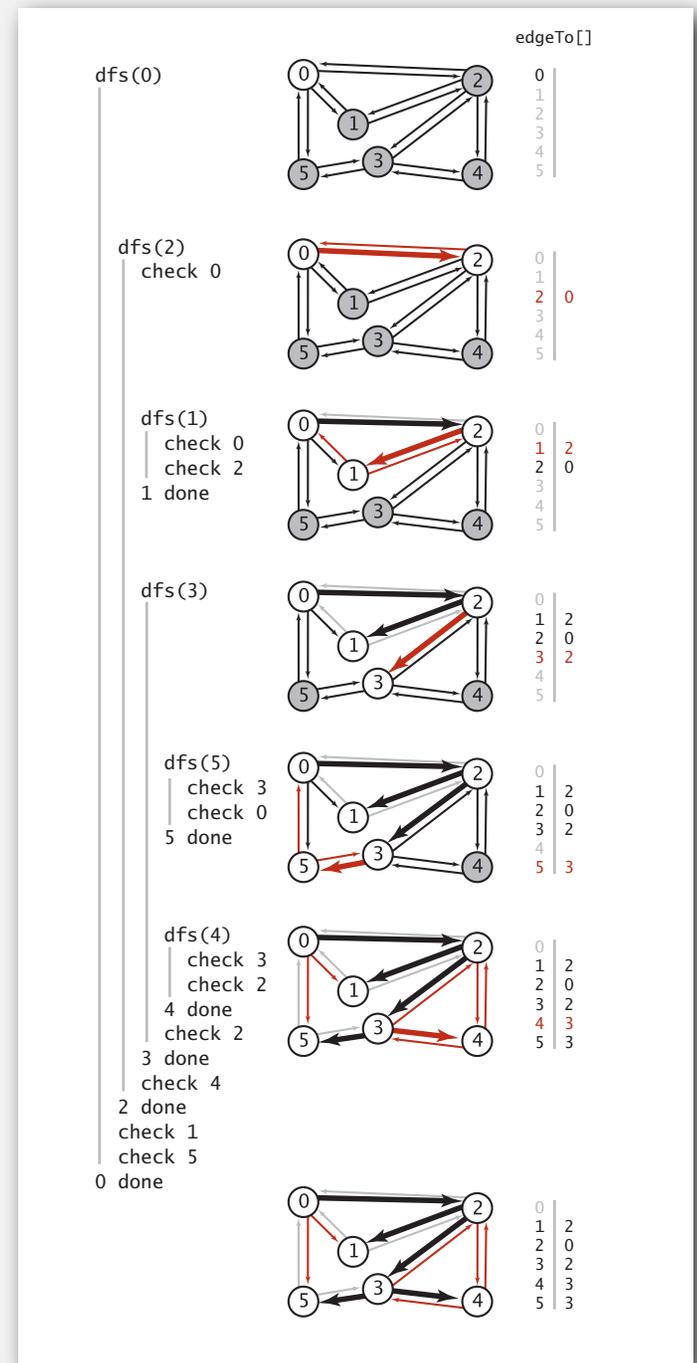

Depth-first search (pathfinding)

```
public class DepthFirstPaths
{
    private boolean[] marked;
    private int[] edgeTo;
    private final int s;

    public DepthFirstPaths(Graph G, int s)
    {
        marked = new boolean[G.V()];
        edgeTo = new int[G.V()];
        this.s = s;
        dfs(G, s);
    }
    private void dfs(Graph G, int v)
    {
        marked[v] = true;
        for (int w : G.adj(v))
            if (!marked[w])
            {
                edgeTo[w] = v;
                dfs(G, w);
            }
    }

    public boolean hasPathTo(int v)
    public Iterable<Integer> pathTo(int v)
}

```


parent-link representation
of DFS tree

set parent link

ahead

Depth-first search (pathfinding iterator)

`edgeTo[]` is a parent-link representation of a tree rooted at s .

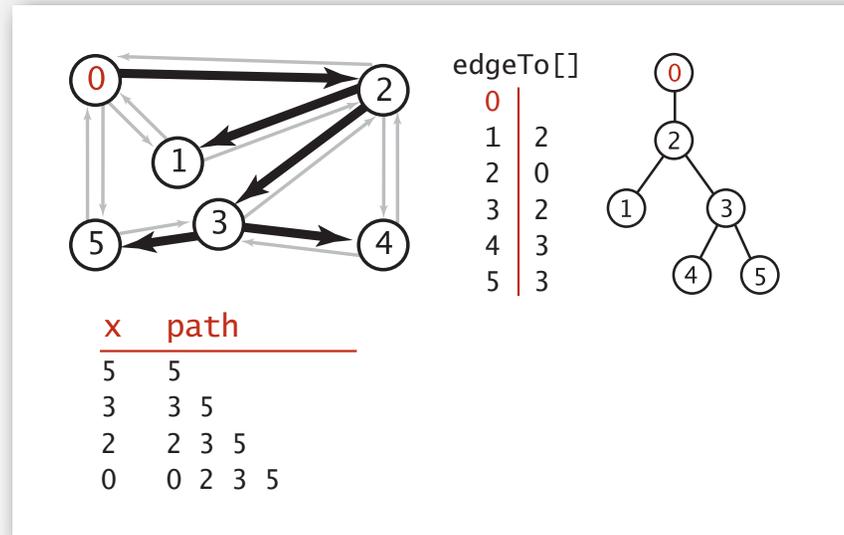

```
public boolean hasPathTo(int v)
{ return marked[v]; }

public Iterable<Integer> pathTo(int v)
{
    if (!hasPathTo(v)) return null;
    Stack<Integer> path = new Stack<Integer>();
    for (int x = v; x != s; x = edgeTo[x])
        path.push(x);
    path.push(s);
    return path;
}
```

Depth-first search summary

Enables direct solution of simple graph problems.

- ✓ • Does there exist a path between s and t ?
- ✓ • Find path between s and t .
 - Connected components (stay tuned).
 - Euler tour (see book).
 - Cycle detection (see book).
 - Bipartiteness checking (see book).

Basis for solving more difficult graph problems.

- Biconnected components (beyond scope).
- Planarity testing (beyond scope).

- ▶ graph API
- ▶ depth-first search
- ▶ **breadth-first search**
- ▶ connected components
- ▶ challenges

Breadth-first search

Depth-first search. Put unvisited vertices on a **stack**.

Breadth-first search. Put unvisited vertices on a **queue**.




Shortest path. Find path from s to t that uses **fewest number of edges**.

BFS (from source vertex s)

Put s onto a FIFO queue, and mark s as visited.

Repeat until the queue is empty:


- remove the least recently added vertex v
 - add each of v 's unvisited neighbors to the queue, and mark them as visited.
-



Intuition. BFS examines vertices in increasing distance from s .

Breadth-first search (pathfinding)

```
private void bfs(Graph G, int s)
{
    Queue<Integer> q = new Queue<Integer>();
    q.enqueue(s);
    marked[s] = true;
    while (!q.isEmpty())
    {
        int v = q.dequeue();
        for (int w : G.adj(v))
            if (!marked[w])
            {
                q.enqueue(w);
                marked[w] = true;
                edgeTo[w] = v;
            }
    }
}
```

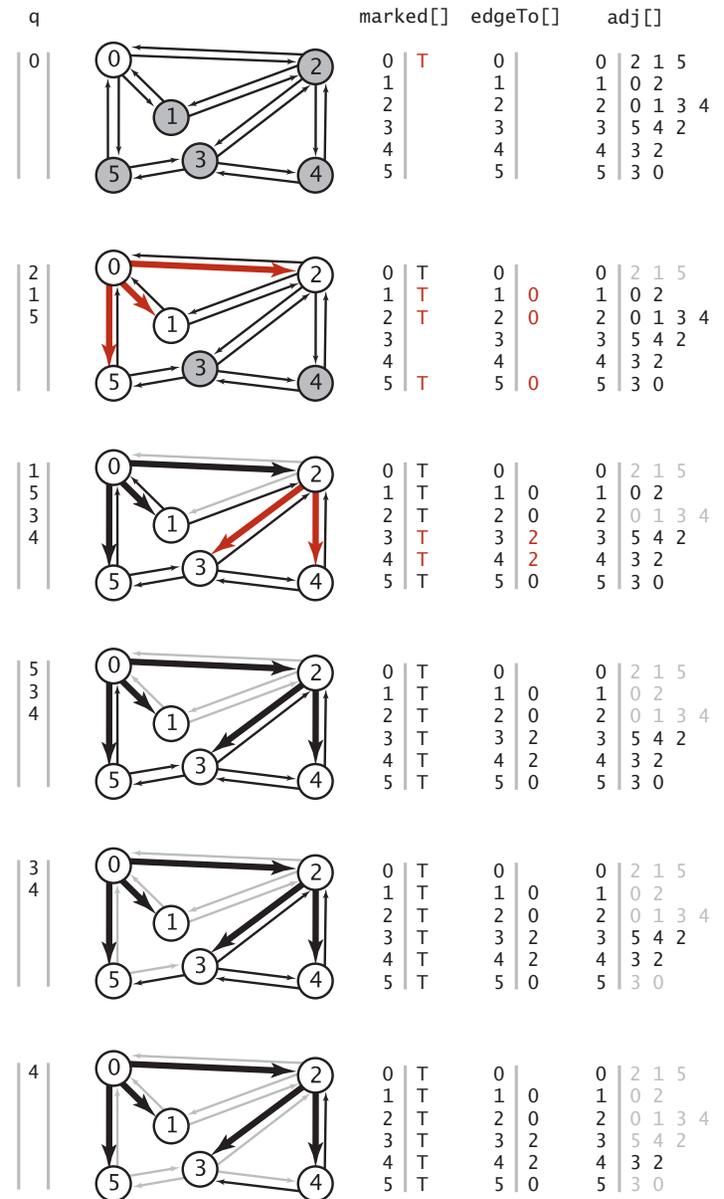


Breadth-first search properties


Proposition. BFS computes shortest path (number of edges) from s in a connected graph in time proportional to $E + V$.

Pf.

- **Correctness:** queue always consists of zero or more vertices of distance k from s , followed by zero or more vertices of distance $k + 1$.
- **Running time:** each vertex connected to s is visited once.

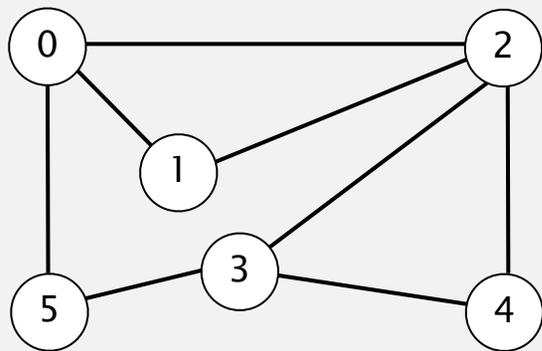


standard drawing

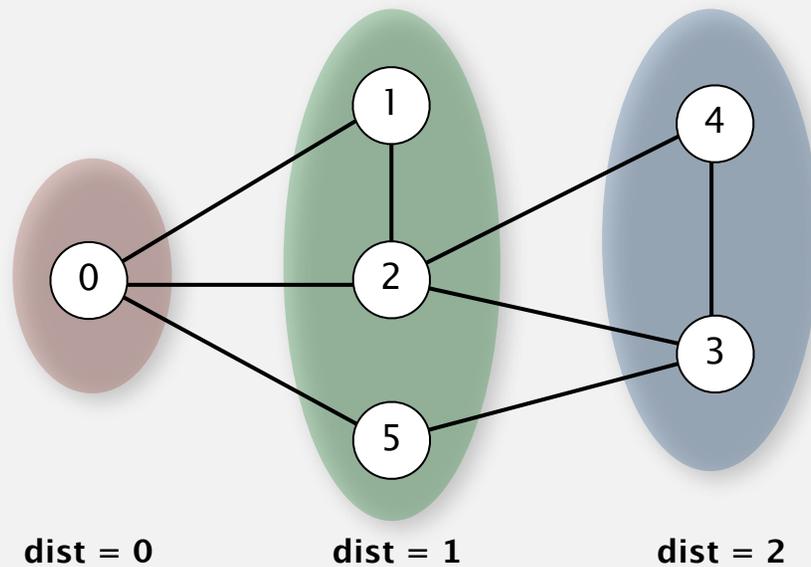

Breadth-first search application: routing

Fewest number of hops in a communication network.

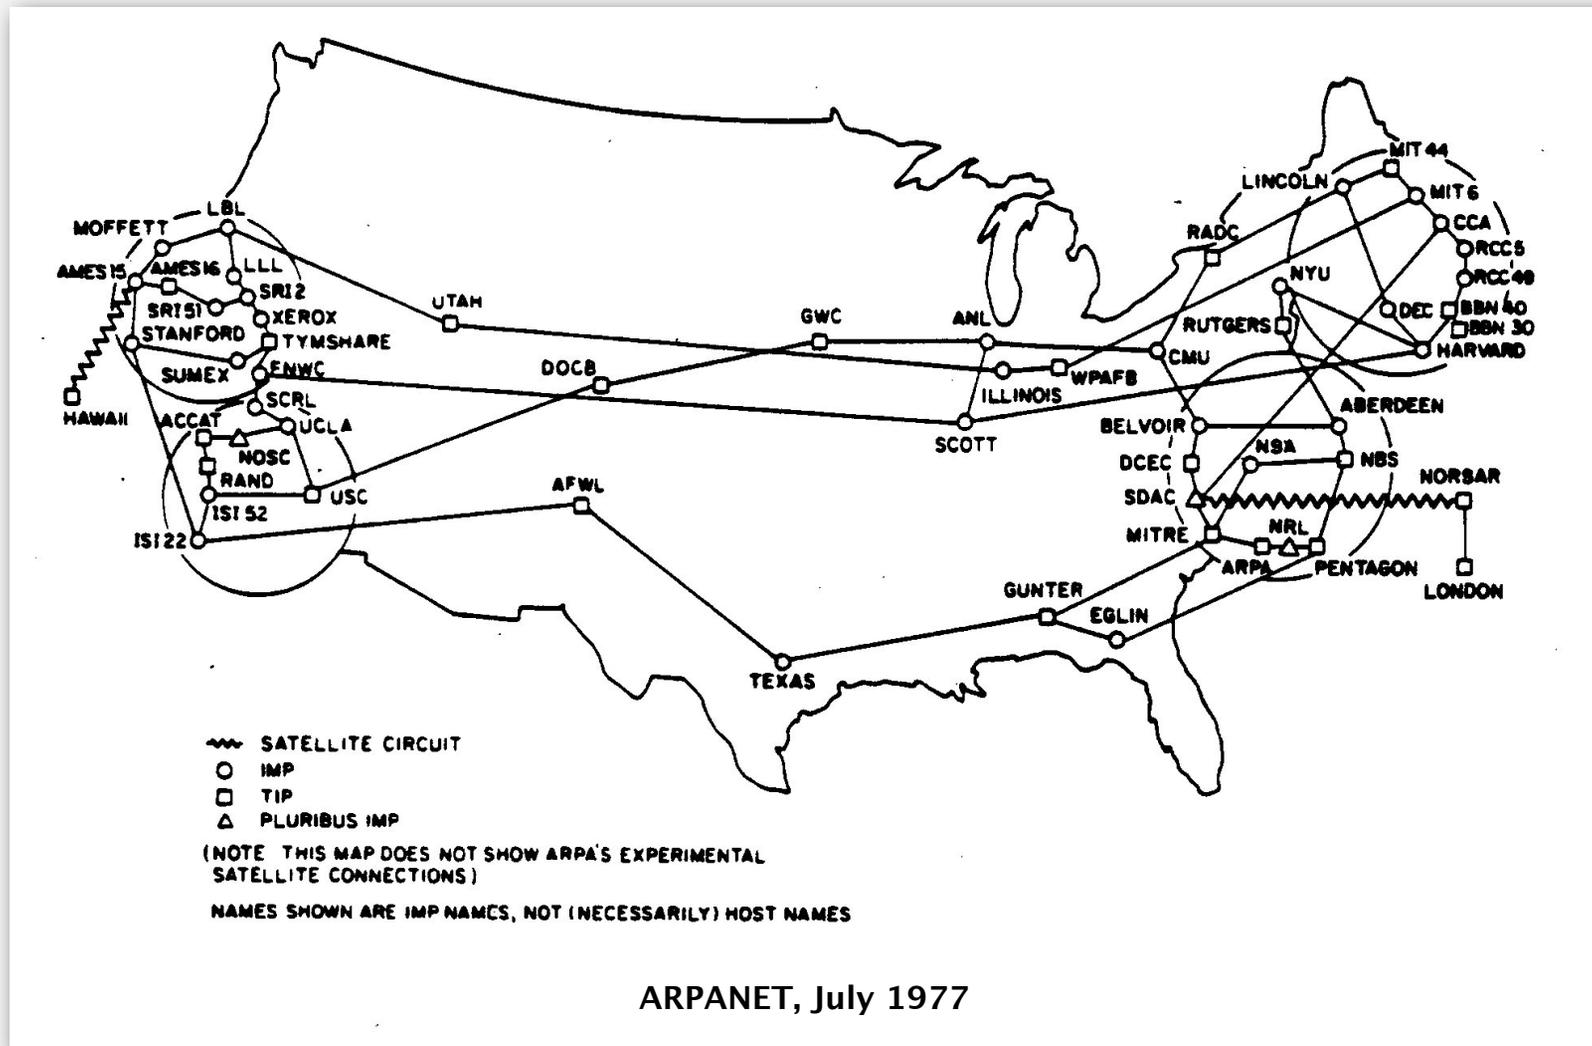

Breadth-first search application: Kevin Bacon numbers

Kevin Bacon numbers.

The Oracle of Bacon

http://www.oracleofbacon.org/cgi-bin/movie/links?game=0&firstname=Kevin+Baco

THE ORACLE OF BACON

Help
Credits
How it Works
Contact Us
Other games >

© 1999-2008 by Patrick Reynolds. All rights reserved.

```
graph TD;
  A[Buzz Mauro] --> B[Sweet Dreams (2005)];
  B --> C[Tatiana Ramirez];
  C --> D[Interior de un silencio, El (2005)];
  D --> E[Andres Suarez];
  E --> F[Carlita's Secret (2004)];
  F --> G[Paula Lemes (I)];
  G --> H[Frost/Nixon (2008)];
  H --> I[Kevin Bacon];
```

Kevin Bacon to Buzz Mauro [Find link] [More options >>]

<http://oracleofbacon.org>



Endless Games board game

New 2 Degrees


Uma Thurman acted in	
Be Cool (2005) with	1°
Scott Adsit who acted in	
The Informant! (2009) with	2°
Matt Damon	

Lookup Trivia # Guess Degrees Scoreboard

SixDegrees iPhone App

Kevin Bacon graph

- Include a vertex for each performer **and** for each movie.
- Connect a movie to all performers that appear in that movie.
- Compute shortest path from $s = \text{Kevin Bacon}$.

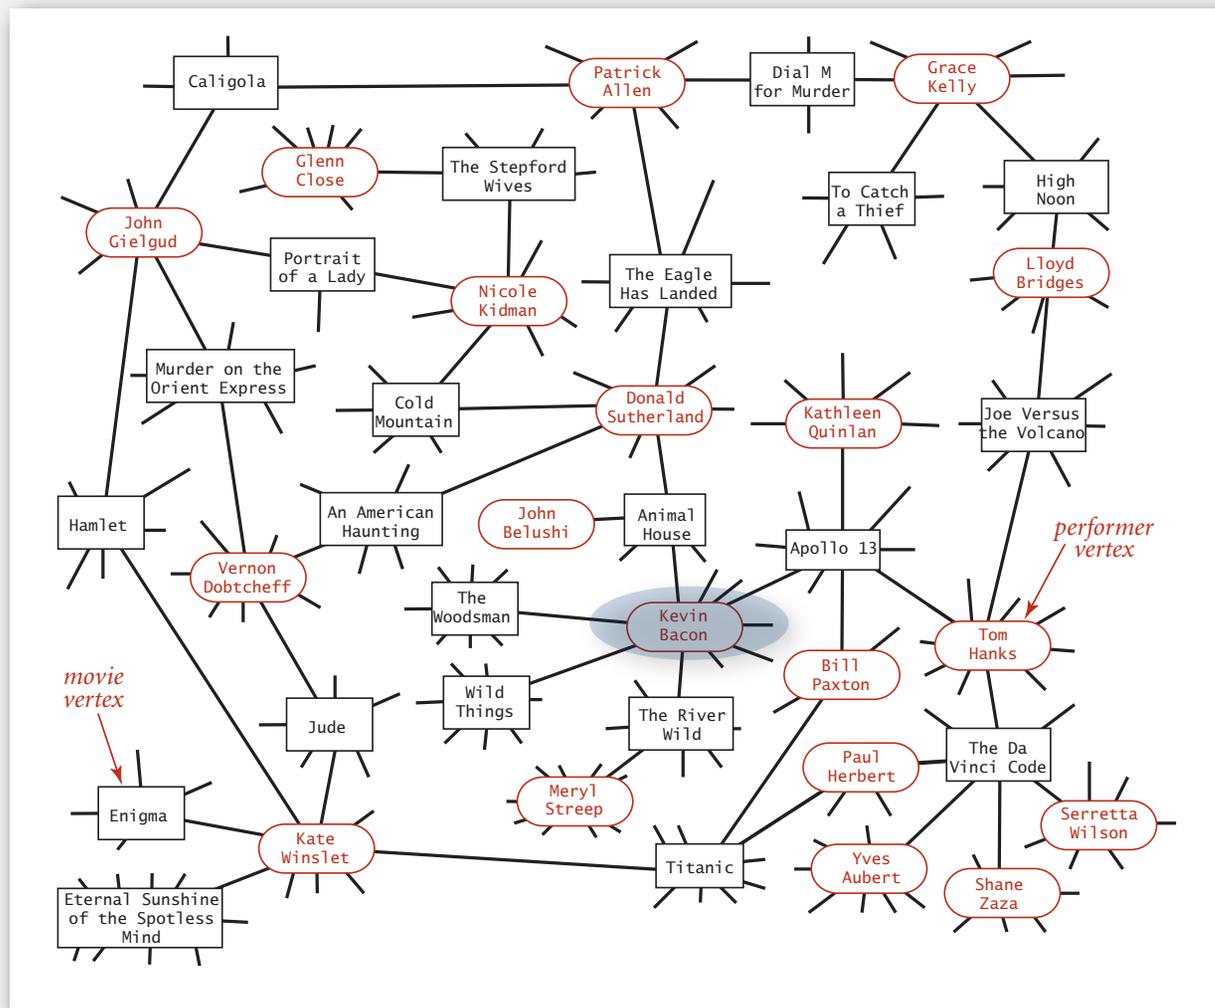

- ▶ graph API
- ▶ depth-first search
- ▶ breadth-first search
- ▶ **connected components**
- ▶ challenges

Connectivity queries

Def. Vertices v and w are **connected** if there is a path between them.

Goal. Preprocess graph to answer queries: is v connected to w ?
in **constant** time.

```
public class CC
```

```
    CC(Graph G)
```

find connected components in G

```
    boolean connected(int v, int w)
```

are v and w connected?

```
    int count()
```

number of connected components

```
    int id(int v)
```

component identifier for v

Union-Find? Not quite.


Depth-first search. Yes. [next few slides]

Connected components

The relation "is connected to" is an **equivalence relation**:

- Reflexive: v is connected to v .
- Symmetric: if v is connected to w , then w is connected to v .
- Transitive: if v connected to w and w connected to x , then v connected to x .

Def. A **connected component** is a maximal set of connected vertices.

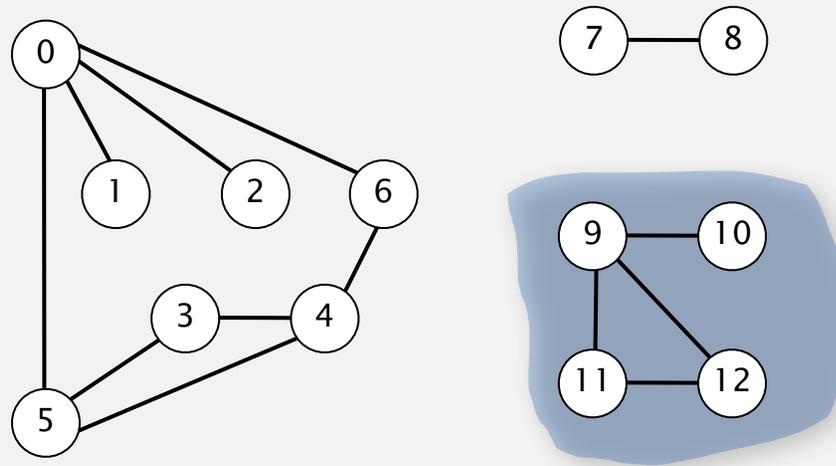


3 connected components

v	id[v]
0	0
1	0
2	0
3	0
4	0
5	0
6	0
7	1
8	1
9	2
10	2
11	2
12	2

Remark. Given connected components, can answer queries in constant time.

Connected components

Def. A **connected component** is a maximal set of connected vertices.

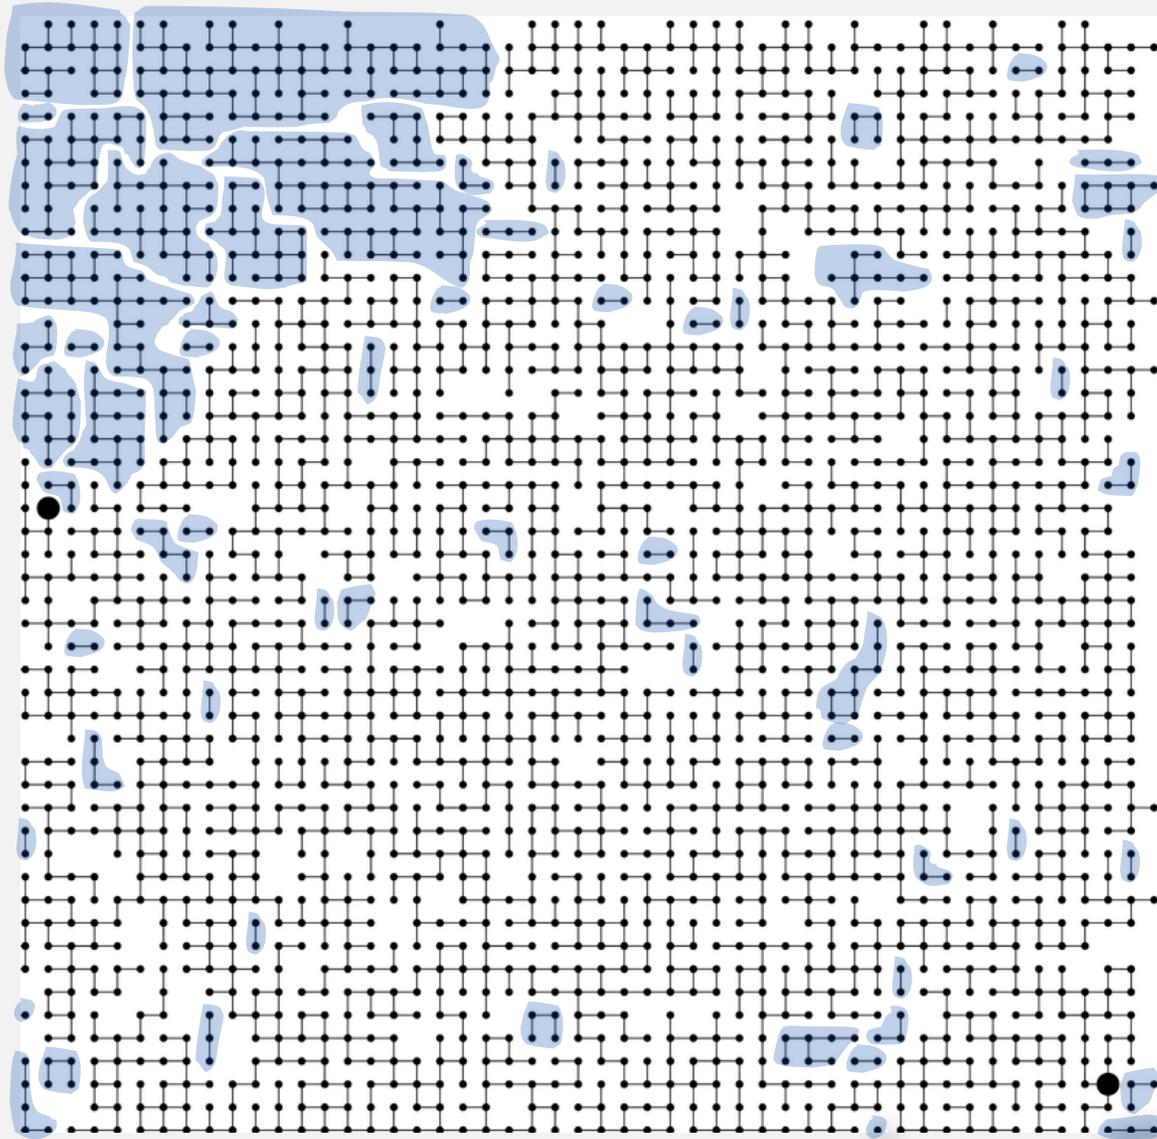

63 connected components


Connected components

Goal. Partition vertices into connected components.

Connected components

Initialize all vertices v as unmarked.

For each unmarked vertex v , run DFS to identify all vertices discovered as part of the same component.

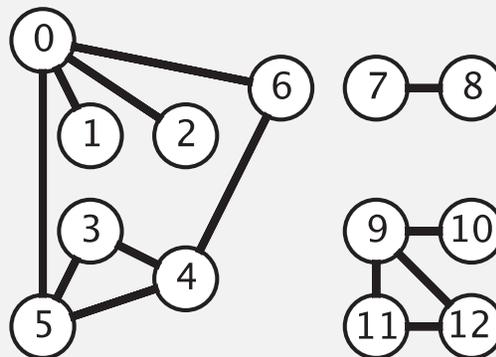

tinyG.txt

$V \rightarrow$ 13
13 $\leftarrow E$

0 5
4 3
0 1
9 12
6 4
5 4
0 2
11 12
9 10
0 6
7 8
9 11
5 3

Finding connected components with DFS

```
public class CC
{
    private boolean marked[];
    private int[] id;
    private int count;

    public CC(Graph G)
    {
        marked = new boolean[G.V()];
        id = new int[G.V()];
        for (int v = 0; v < G.V(); v++)
        {
            if (!marked[v])
            {
                dfs(G, v);
                count++;
            }
        }
    }

    public int count()
    public int id(int v)
    private void dfs(Graph G, int v)
}
}
```

id[v] = id of component containing v
number of components

run DFS from one vertex in
each component

see next slide

Finding connected components with DFS (continued)

```
public int count()  
{ return count; }
```

← number of components

```
public int id(int v)  
{ return id[v]; }
```

← id of component containing v

```
private void dfs(Graph G, int v)  
{  
    marked[v] = true;  
    id[v] = count;  
    for (int w : G.adj(v))  
        if (!marked[w])  
            dfs(G, w);  
}
```

← all vertices discovered in
same call of dfs have same id

Finding connected components with DFS (trace)


	<u>count</u>	<u>marked[]</u>												<u>id[]</u>													
		0	1	2	3	4	5	6	7	8	9	10	11	12	0	1	2	3	4	5	6	7	8	9	10	11	12
dfs(0)	0	T													0												
dfs(6)	0	T						T							0					0							
check 0																											
dfs(4)	0	T				T		T							0				0		0						
dfs(5)	0	T				T	T	T							0				0	0	0						
dfs(3)	0	T				T	T	T	T						0				0	0	0	0					
check 5																											
check 4																											
3 done																											
check 4																											
check 0																											
5 done																											
check 6																											
check 3																											
4 done																											
6 done																											
dfs(2)	0	T	T	T	T	T	T	T						0	0	0	0	0	0	0							
check 0																											
2 done																											
dfs(1)	0	T	T	T	T	T	T	T						0	0	0	0	0	0	0							
check 0																											
1 done																											
check 5																											
0 done																											

Finding connected components with DFS (trace)


```

0 done
dfs(7)
| dfs(8)
| | check 7
| | 8 done
| 7 done
dfs(9)
| dfs(11)
| | check 9
| | dfs(12)
| | | check 11
| | | check 9
| | 12 done
| 11 done
dfs(10)
| check 9
| 10 done
| check 12
9 done
    
```

	<u>count</u>	<u>marked[]</u>	<u>id[]</u>
		0 1 2 3 4 5 6 7 8 9 10 11 12	0 1 2 3 4 5 6 7 8 9 10 11 12
0 done			
dfs(7)	1	T T T T T T T T	0 0 0 0 0 0 0 0 1
dfs(8)	1	T T T T T T T T	0 0 0 0 0 0 0 1 1
check 7			
8 done			
7 done			
dfs(9)	2	T T T T T T T T T	0 0 0 0 0 0 0 1 1 2
dfs(11)	2	T T T T T T T T T	0 0 0 0 0 0 0 1 1 2 2
check 9			
dfs(12)	2	T T T T T T T T T	0 0 0 0 0 0 0 1 1 2 2 2
check 11			
check 9			
12 done			
11 done			
dfs(10)	2	T T T T T T T T T	0 0 0 0 0 0 0 1 1 2 2 2 2
check 9			
10 done			
check 12			
9 done			

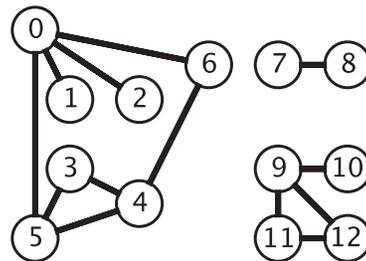

Connected components application: study spread of STDs

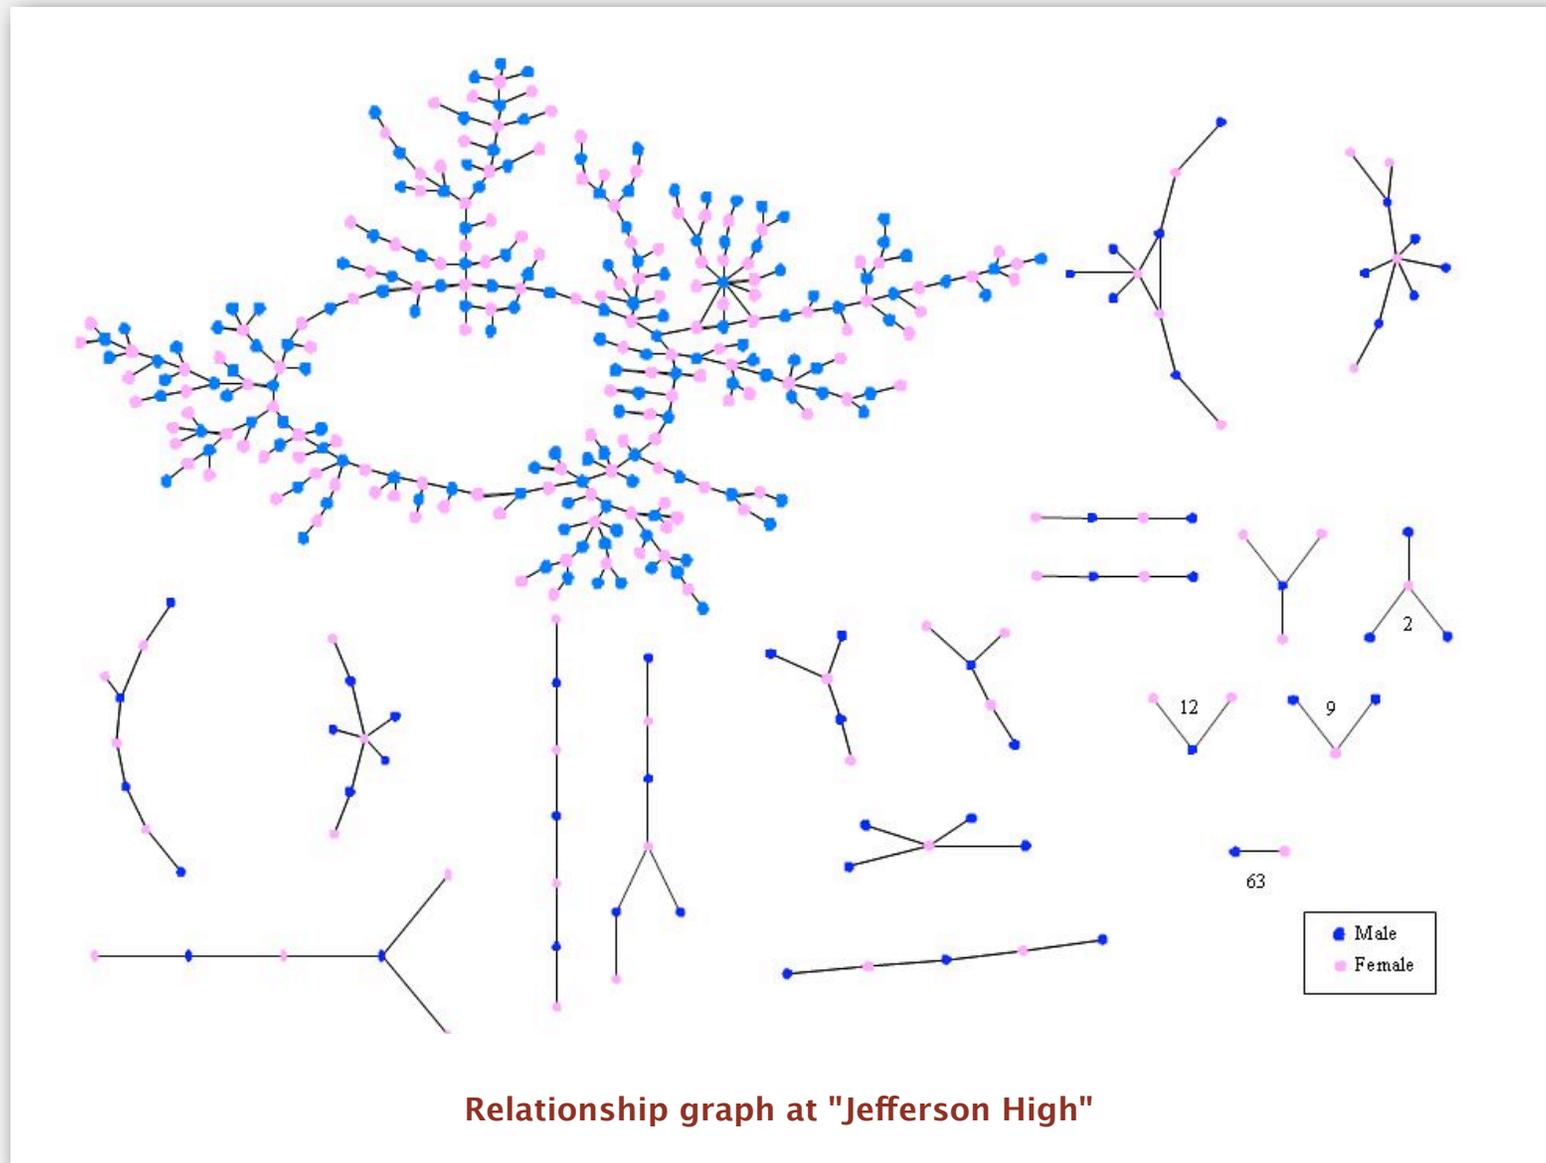



Peter Bearman, James Moody, and Katherine Stovel. Chains of affection: The structure of adolescent romantic and sexual networks. *American Journal of Sociology*, 110(1): 44-99, 2004.

Connected components application: particle detection

Particle detection. Given grayscale image of particles, identify "blobs."

- Vertex: pixel.
- Edge: between two adjacent pixels with grayscale value ≥ 70 .
- Blob: connected component of 20-30 pixels.

black = 0
white = 255

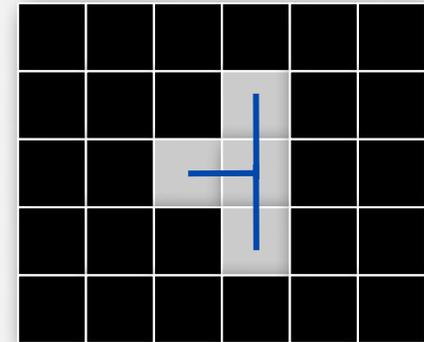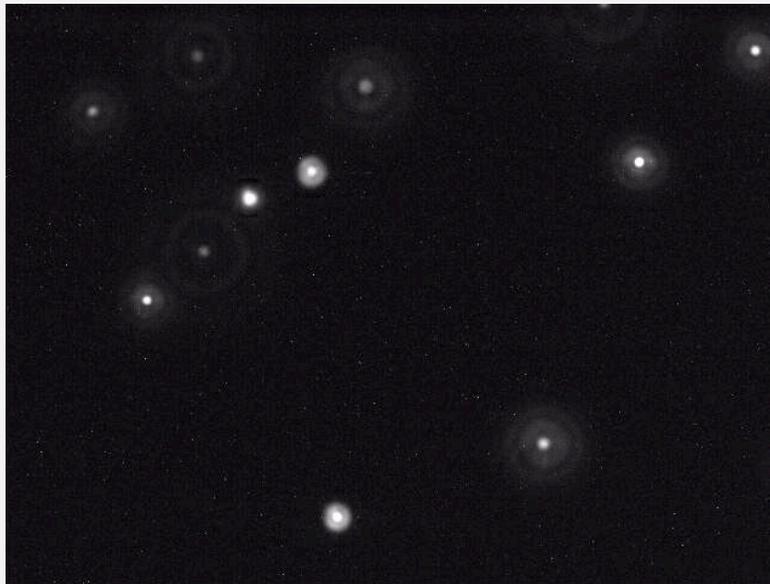

Particle tracking. Track moving particles over time.



- ▶ graph API
- ▶ depth-first search
- ▶ breadth-first search
- ▶ connected components
- ▶ **challenges**

Graph-processing challenge 1


Problem. Is a graph bipartite?

How difficult?

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.

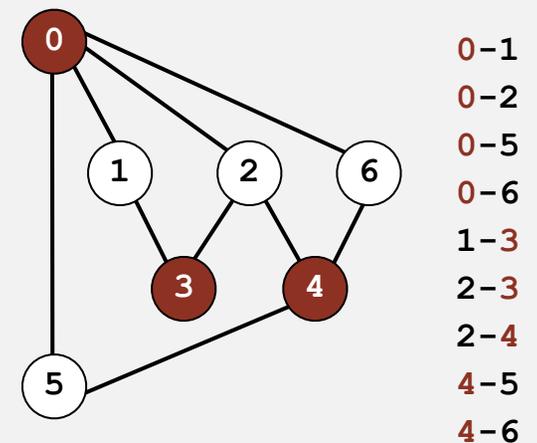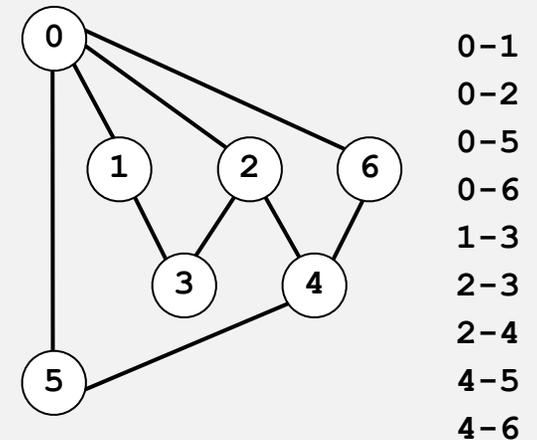

Bipartiteness application

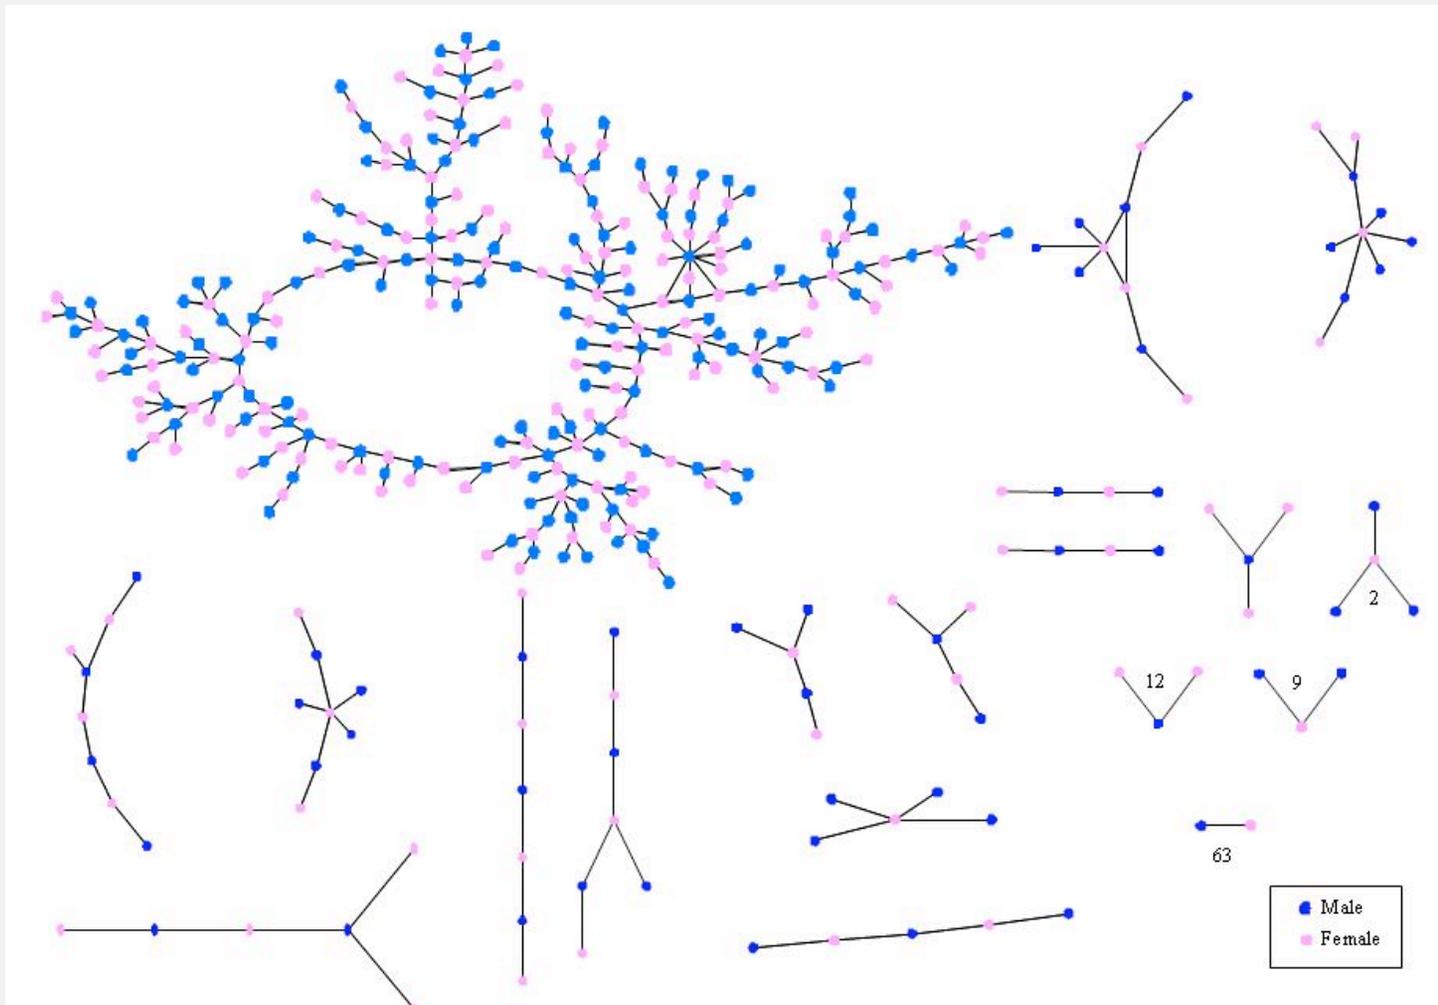

Relationship graph at "Jefferson High"



Peter Bearman, James Moody, and Katherine Stovel. Chains of affection: The structure of adolescent romantic and sexual networks. American Journal of Sociology, 110(1): 44-99, 2004.

Graph-processing challenge 2

Problem. Find a cycle.

How difficult?

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.

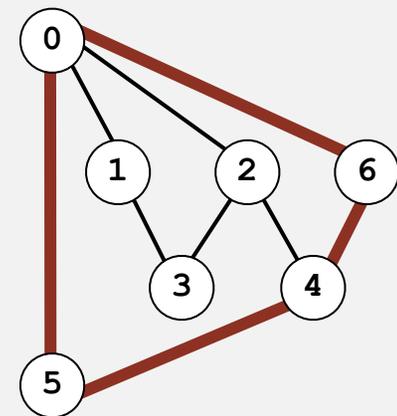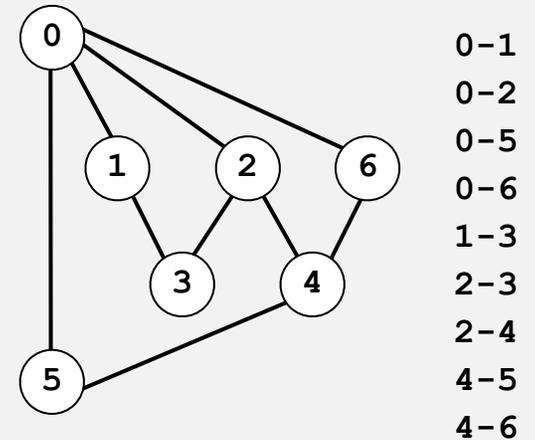


Graph-processing challenge 3

Problem. Find a cycle that uses every edge.

Assumption. Need to use each edge exactly once.

How difficult?



- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.

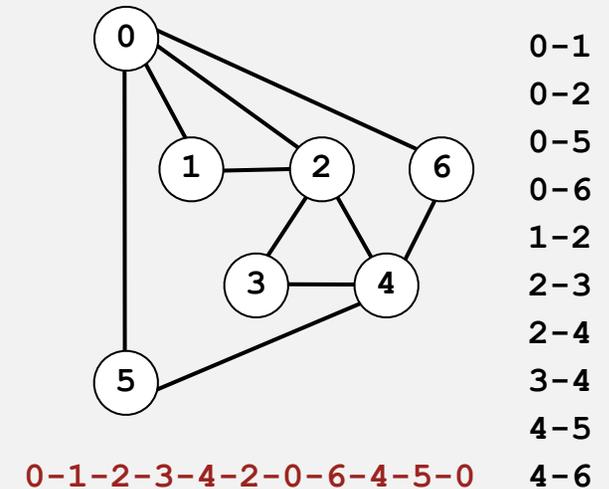

Bridges of Königsberg

The Seven Bridges of Königsberg. [Leonhard Euler 1736]

“ ... in Königsberg in Prussia, there is an island A, called the Kneiphof; the river which surrounds it is divided into two branches ... and these branches are crossed by seven bridges. Concerning these bridges, it was asked whether anyone could arrange a route in such a way that he could cross each bridge once and only once. ”

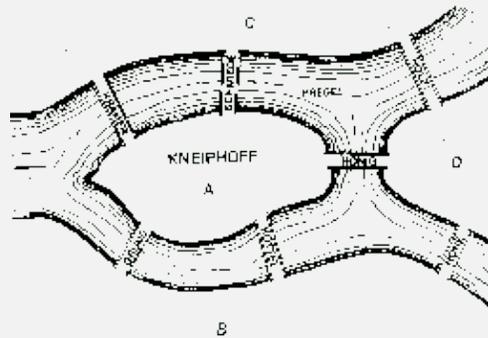

Euler tour. Is there a (general) cycle that uses each edge exactly once?

Answer. Yes iff connected and all vertices have **even** degree.

To find path. DFS-based algorithm (see textbook).


Graph-processing challenge 4

Problem. Find a cycle that visits every vertex.

Assumption. Need to visit each vertex exactly once.

How difficult?

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.


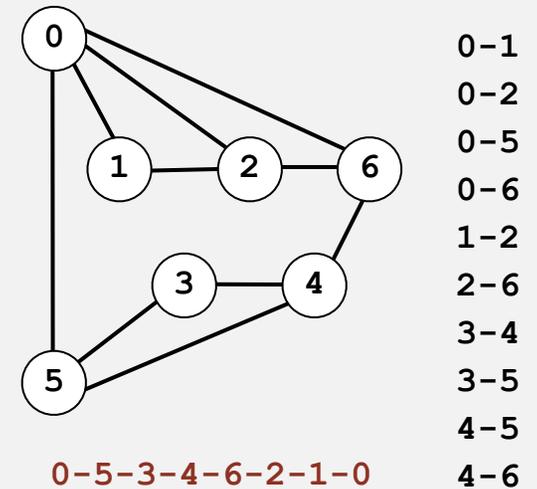


Graph-processing challenge 5

Problem. Are two graphs identical except for vertex names?

How difficult?

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.

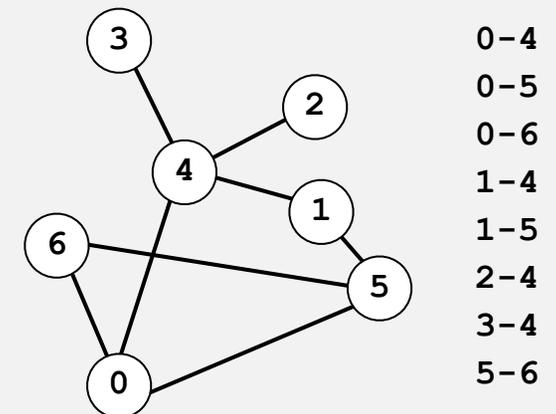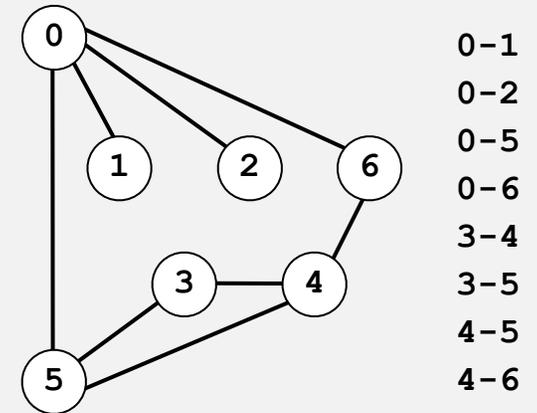

$0 \leftrightarrow 4, 1 \leftrightarrow 3, 2 \leftrightarrow 2, 3 \leftrightarrow 6, 4 \leftrightarrow 5, 5 \leftrightarrow 0, 6 \leftrightarrow 1$

Graph-processing challenge 6

Problem. Lay out a graph in the plane without crossing edges?

How difficult?

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.

