


3.1 Data Types

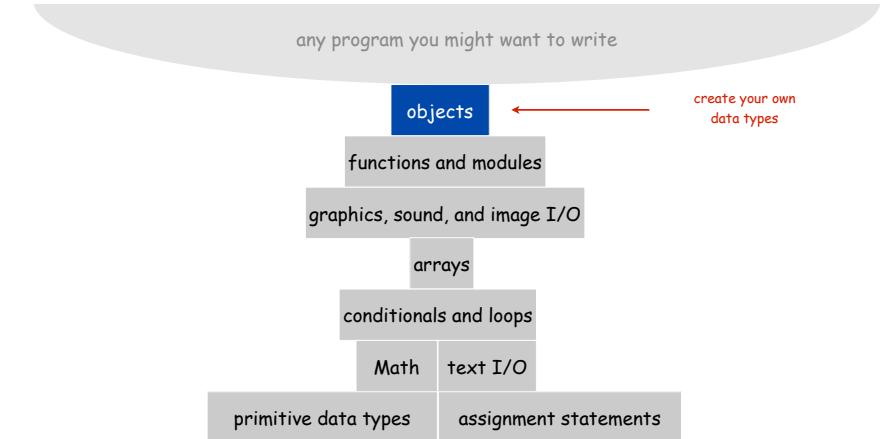

Abstract Data Types

Data type. Set of values and operations on those values.

Abstract data type. Data type whose representation is hidden from the user.

Primitive types.

- values directly map to machine representations
- operations directly translate to machine instructions.

Data Type	Set of Values	Operations
boolean	true, false	not, and, or, xor
int	- 2^{31} to $2^{31} - 1$	add, subtract, multiply
double	any of 2^{64} possible reals	add, subtract, multiply

We want to write programs that process other types of data.

- Colors, pictures, strings, input streams, ...
- Complex numbers, vectors, matrices, polynomials, ...
- Points, polygons, charged particles, celestial bodies, ...

Objects

Object. Holds a data type value; variable name refers to object.

Object-oriented programming.

- Create your own data types (sets of values and ops on them)
- Use them in your programs (manipulate objects that hold values).

Data Type	Set of Values	Operations
Color	24 bits	get red component, brighten
Picture	2D array of colors	get/set color of pixel (i, j)
String	sequence of characters	length, substring, compare

Abstract data type (ADT). Object representation is hidden.

Impact. We can use ADTs without knowing implementation details.

- this lecture: how to write client programs for several useful ADTs
- next lecture: how to implement your own ADTs

Constructors and Methods

To use a data type, you need to know how to:

- Construct new objects.
- Apply operations to a given object.

To construct a new object:

- Use keyword `new` to invoke a "constructor."
- Use name of data type to specify which type of object.

To apply an operation:

- Use name of object to specify which object
- Use the **dot operator** to indicate an operation is to be applied
- Use a **method name** to specify which operation


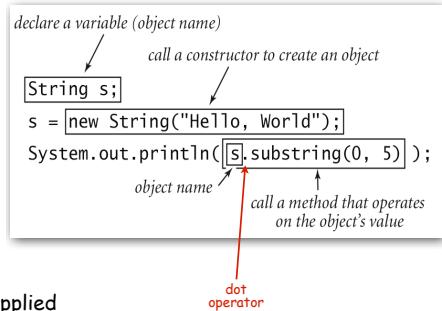


Image Processing

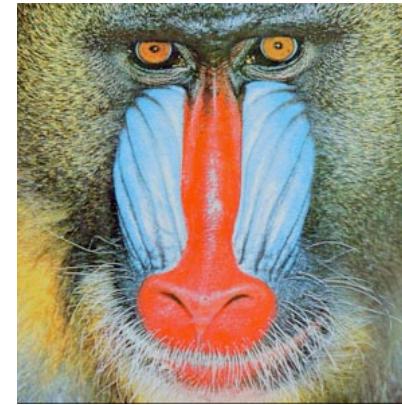

Color Data Type

Color. A sensation in the eye from electromagnetic radiation.

Set of values. [RGB representation] 256^3 possible values, which quantify the amount of red, green, and blue, each on a scale of 0 to 255.

R	G	B	Color
255	0	0	Red
0	255	0	Green
0	0	255	Blue
255	255	255	White
0	0	0	Black
255	0	255	Magenta
105	105	105	Grey

Color Data Type

Color. A sensation in the eye from electromagnetic radiation.

Set of values. [RGB representation] 256^3 possible values, which quantify the amount of red, green, and blue, each on a scale of 0 to 255.


API (Application Programming Interface) specifies set of operations.

```
public class java.awt.Color
    Color(int r, int g, int b)
    int getRed()           red intensity
    int getGreen()          green intensity
    int getBlue()           blue intensity
    Color brighter()       brighter version of this color
    Color darker()         darker version of this color
    String toString()      string representation of this color
    boolean equals(Color c) is this color's value the same as c's?
```

<http://java.sun.com/j2se/1.5.0/docs/api/java/awt/Color.html>

Albers Squares


[Josef Albers](#). Revolutionized the way people think about color.

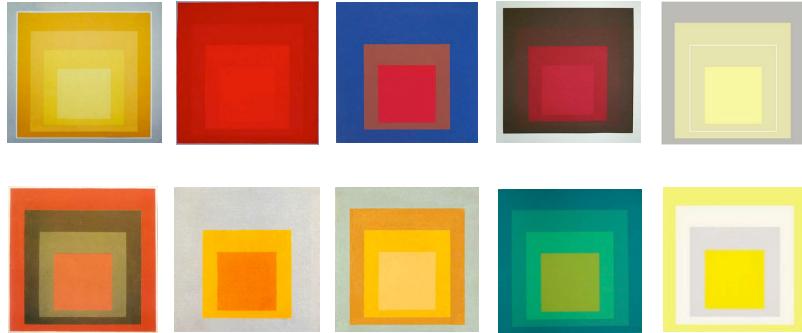

Homage to the Square by Josef Albers (1949-1975)

Albers Squares

[Josef Albers](#). Revolutionized the way people think about color.

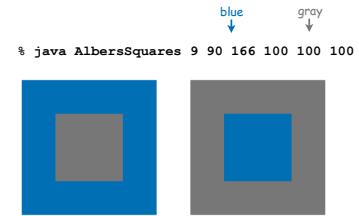

Example Client Program for Color ADT

```
import java.awt.Color;           to access Color library

public class AlbersSquares
{
    public static void main(String[] args)
    {
        int r1 = Integer.parseInt(args[0]);           first color
        int g1 = Integer.parseInt(args[1]);
        int b1 = Integer.parseInt(args[2]);
        Color c1 = new Color(r1, g1, b1);

        int r2 = Integer.parseInt(args[3]);           second color
        int g2 = Integer.parseInt(args[4]);
        int b2 = Integer.parseInt(args[5]);
        Color c2 = new Color(r2, g2, b2);

        StdDraw.setPenColor(c1);           first square
        StdDraw.filledSquare(.25, .5, .2);
        StdDraw.setPenColor(c2);
        StdDraw.filledSquare(.25, .5, .1);

        StdDraw.setPenColor(c2);           second square
        StdDraw.filledSquare(.75, .5, .2);
        StdDraw.setPenColor(c1);
        StdDraw.filledSquare(.75, .5, .1);
    }
}
```

9

10

Monochrome Luminance

[Monochrome luminance](#). Effective brightness of a color.

[NTSC formula](#). $Y = 0.299r + 0.587g + 0.114b$.

```
import java.awt.Color;

public class Luminance
{
    public static double lum(Color c)
    {
        int r = c.getRed();
        int g = c.getGreen();
        int b = c.getBlue();
        return .299*r + .587*g + .114*b;
    }
}
```

11

12

Color Compatibility

Q. Which font colors will be most readable with which background colors on computer monitors and cell phone screens?

A. Rule of thumb: difference in luminance should be ≥ 128 .



```
public static boolean compatible(Color a, Color b)
{
    return Math.abs(lum(a) - lum(b)) >= 128.0;
}
```

Grayscale

Grayscale. When all three R, G, and B values are the same, resulting color is on grayscale from 0 (black) to 255 (white).

Convert to grayscale. Use luminance to determine value.

red	green	blue	this color
9	90	166	
74	74	74	
0	0	0	

0.299 * 9 + 0.587 * 90 + 0.114 * 166 = 74.445

round double to nearest int


Bottom line. We are writing programs that manipulate **color**.

13

14

OOP Context for Color

Possible memory representation (stay tuned for details).

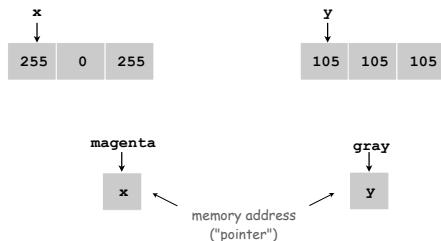

Object reference is analogous to variable name.

- We can manipulate the value that it holds.
- We can pass it to (or return it from) a method.

Similar to references to arrays.

References

René Magritte. "This is not a pipe."



Java. This is not a color.


```
Color sienna = new Color(160, 82, 45);
Color c = sienna.darker();
```

15

16

OOP. Natural vehicle for studying abstract models of the real world.

This is Not a Pipe

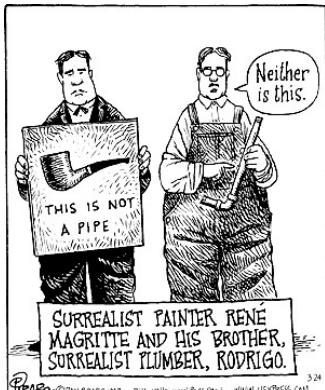

Neither is this.

```
% java RandomSeq 10000 | java Average
```

Dan Piraro, <http://www.uexpress.com>

Picture Data Type

Raster graphics. Basis for image processing.


Set of values. 2D array of color objects (pixels).

API.

```
public class Picture
```

```
Picture(String filename)
Picture(int w, int h)
int width()
int height()
Color get(int i, int j)
void set(int i, int j, Color c)
void show()
void save(String filename)
```

*create a picture from a file
create a blank w-by-h picture
return the width of the picture
return the height of the picture
return the color of pixel (i,j)
set the color of pixel (i,j) to c
display the image in a window
save the image to a file*

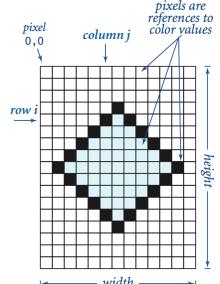

17


18

Image Processing: Grayscale Filter


Goal. Convert color image to grayscale according to luminance formula.

```
import java.awt.Color;
public class Grayscale
{
    public static void main(String[] args)
    {
        Picture pic = new Picture(args[0]);
        for (int i = 0; i < pic.width(); i++)
            for (int j = 0; j < pic.height(); j++)
            {
                Color color = pic.get(i, j);
                Color gray = Luminance.toGray(color);
                pic.set(i, j, gray);
            }
        pic.show();
    }
}
```

set each
pixel to
gray

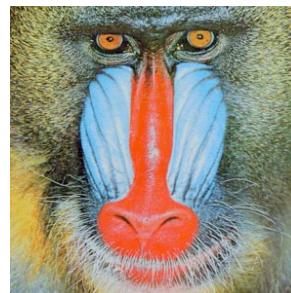

mandrill.jpg

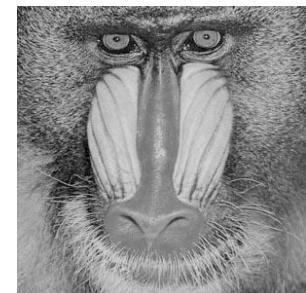

% java Grayscale mandrill.jpg

Image Processing: Grayscale Filter

Goal. Convert color image to grayscale according to luminance formula.

19

20

TEQ on Image Processing 1

What does the following code do? (Easy question!)



```
Picture pic = new Picture(args[0]);
for (int i = 0; i < pic.width(); i++)
    for (int j = 0; j < pic.height(); j++)
        pic.set(i, j, pic.get(i, j)); pic.show();
```

TEQ on Image Processing 1

What does the following code do? (Easy question!)

```
Picture pic = new Picture(args[0]);
for (int i = 0; i < pic.width(); i++)
    for (int j = 0; j < pic.height(); j++)
        pic.set(i, j, pic.get(i, j));
pic.show();
```

A. Nothing, then shows the picture.

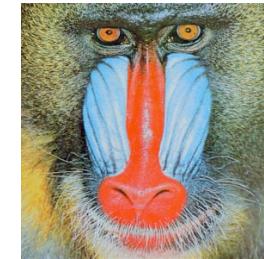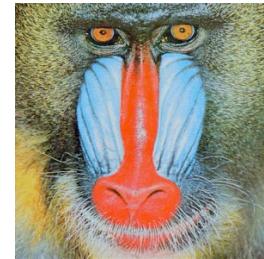

21

22

TEQ on Image Processing 2

What does the following code do? (Hard question.)



```
Picture pic = new Picture(args[0]);
for (int i = 0; i < pic.width(); i++)
    for (int j = 0; j < pic.height(); j++)
        pic.set(i, pic.height()-j-1, pic.get(i, j));
pic.show();
```

TEQ on Image Processing 2

What does the following code do? (Hard question.)

```
Picture pic = new Picture(args[0]);
for (int i = 0; i < pic.width(); i++)
    for (int j = 0; j < pic.height(); j++)
        pic.set(i, pic.height()-j-1, pic.get(i, j));
pic.show();
```

A. Tries to turn image upside down, but fails. An instructive bug!

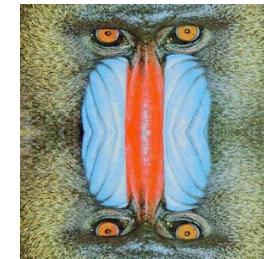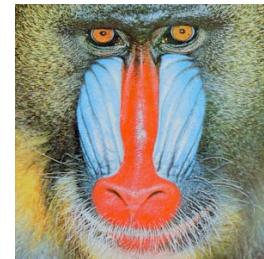

23

24

TEQ on Image Processing 3

What does the following code do?



```
Picture source = new Picture(args[0]);
int width = source.width();
int height = source.height();
Picture target = new Picture(width, height);
for (int i = 0; i < width; i++)
    for (int j = 0; j < height; j++)
        target.set(i, height-j-1, source.get(i, j));
target.show();
```

TEQ on Image Processing 3

What does the following code do? (Hard question.)

```
Picture source = new Picture(args[0]);
int width = source.width();
int height = source.height();
Picture target = new Picture(width, height);
for (int i = 0; i < width; i++)
    for (int j = 0; j < height; j++)
        target.set(i, height-j-1, source.get(i, j));
target.show();
```

A. Makes an upside-down copy of the image.

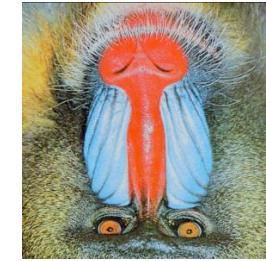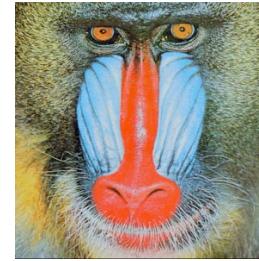

25


26

Image Processing: Scaling Filter

Goal. Shrink or enlarge an image to desired size.

Downscaling. To shrink in half, delete half the rows and columns.

Upscaling. To enlarge to double, replace each pixel by 4 copies.

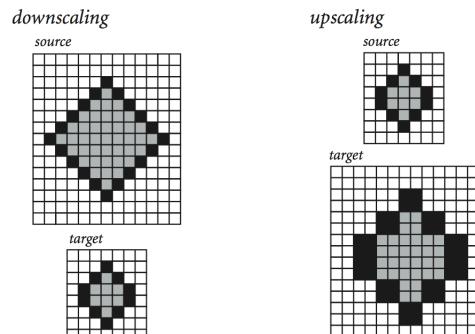


27

Image Processing: Scaling Filter

Goal. Shrink or enlarge an image to desired size.

Uniform strategy. To convert from w_s -by- h_s to w_t -by- h_t :

- Scale column index by w_s / w_t .
- Scale row index by h_s / h_t .
- Set color of pixel (i, j) in target image to color of pixel $(i \times w_s / w_t, j \times h_s / h_t)$ in source image.

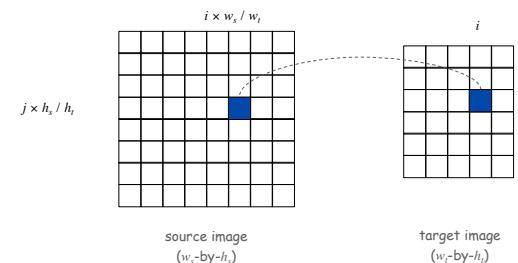


28

Image Processing: Scaling Filter

```
import java.awt.Color;  
  
public class Scale  
{  
    public static void main(String args[])  
    {  
        String filename = args[0];  
        int w = Integer.parseInt(args[1]);  
        int h = Integer.parseInt(args[2]);  
        Picture source = new Picture(filename);  
        Picture target = new Picture(w, h);  
        for (int ti = 0; ti < w; ti++)  
            for (int tj = 0; tj < h; tj++)  
            {  
                int si = ti * source.width() / w;  
                int sj = tj * source.height() / h;  
                Color color = source.get(si, sj);  
                target.set(ti, tj, color);  
            }  
        source.show();  
        target.show();  
    }  
}
```

Image Processing: Scaling Filter

Scaling filter. Creates two Picture objects and two windows.

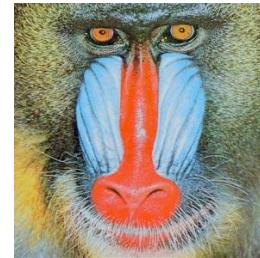

mandrill.jpg



% java Scale 400 200 mandrill.jpg

29

30

More Image Processing Effects



RGB color separation

String Processing



swirl filter

wave filter

glass filter

Sobel edge detection

31

String Data Type

String data type. Basis for text processing.

Set of values. Sequence of Unicode characters.

API.

```
public class String (Java string data type)
    String(String s)           create a string with the same value as s
    int length()               string length
    char charAt(int i)         ith character
    String substring(int i, int j) ith through (j-1)st characters
    boolean contains(String sub) does string contain sub as a substring?
    boolean startsWith(String pre) does string start with pre?
    boolean endsWith(String post) does string end with post?
    int indexOf(String p)      index of first occurrence of p
    int indexOf(String p, int i) index of first occurrence of p after i
    String concat(String t)    this string with t appended
    int compareTo(String t)    string comparison
    String replaceAll(String a, String b) result of changing as to bs
    String[] split(String delim) strings between occurrences of delim
    boolean equals(String t)   is this string's value the same as t's?
```

<http://java.sun.com/javase/6/docs/api/java/lang/String.html>

33

Typical String Processing Code

```
is the string
a palindrome?
public static boolean isPalindrome(String s)
{
    int N = s.length();
    for (int i = 0; i < N/2; i++)
        if (s.charAt(i) != s.charAt(N-1-i))
            return false;
    return true;
}
```

extract file name
and extension from a
command-line
argument

```
String s = args[0];
int dot = s.indexOf(".");
String base   = s.substring(0, dot);
String extension = s.substring(dot + 1, s.length());
```

print all lines in
standard input that
contain a string
specified on the
command line

```
String query = args[0];
while (!StdIn.isEmpty())
{
    String s = StdIn.readLine();
    if (s.contains(query)) StdOut.println(s);
}
```

print all the hyperlinks
(to educational institu-
tions) in the text file on
standard input

```
while (!StdIn.isEmpty())
{
    String s = StdIn.readString();
    if (s.startsWith("http://") && s.endsWith(".edu"))
        StdOut.println(s);
}
```

34

Gene Finding


Pre-genomics era. Sequence a human genome.

Post-genomics era. Analyze the data and understand structure.

Genomics. Represent genome as a string over { A, C, T, G } alphabet.

Gene. A substring of genome that represents a functional unit.

- Preceded by ATG. [start codon]
- Multiple of 3 nucleotides. [codons other than start/stop]
- Succeeded by TAG, TAA, or TGA. [stop codons]

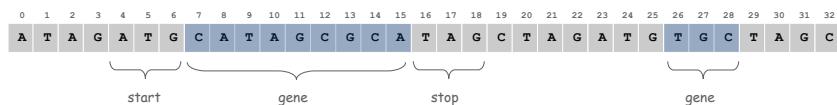

35

Gene Finding: Algorithm

Algorithm. Scan left-to-right through genome.

- If start codon found, then set beg to index i.
- If stop codon found and substring length is a multiple of 3
 - output gene
 - reset beg to -1

i	codon	beg	output	remaining portion of input string
0	ATA	-1		ATA GATGCATAGCCATAGCTAGATGTGCTAGC
3	GAT	-1		GAT GCATAGCCATAGCTAGATGTGCTAGC
4	ATG	4		ATG CATAGCCATAGCTAGATGTGCTAGC
9	TAG	4		TAG CGCATAGCTAGATGTGCTAGC
16	TAG	4	CATAGCGCA	TAG CTAGATGTGCTAGC
start				multiple of 3
20	TAG	-1		TAG ATGTGCTAGC
23	ATG	23		AT GTGCTAGC
29	TAG	23	TGC	TAGC

36

Gene Finding: Implementation

```

public class GeneFind
{
    public static void main(String[] args)
    {
        String start = args[0];
        String stop = args[1];
        String genome = StdIn.readAll();

        int beg = -1;
        for (int i = 0; i < genome.length() - 2; i++)
        {
            String codon = genome.substring(i, i+3);
            if (codon.equals(start)) beg = i;
            if (codon.equals(stop) && beg != -1 && beg+3 < i)
            {
                String gene = genome.substring(beg+3, i);
                if (gene.length() % 3 == 0)
                {
                    StdOut.println(gene);
                    beg = -1;
                }
            }
        }
    }
}

% more genomeTiny.txt
ATAGATGCATAGCGCAATAGCTAGATGTTGCTAGC

% java GeneFind ATG TAG < genomeTiny.txt
CATAGCGCA
TGC

```


Fixes bug in Prog 3.1.8
TEQ 1: What's the bug?
TEQ 2: Give input that makes Prog 3.1.8 crash

37

OOP Context for Strings

Possible memory representation of a string

- `genome = "aacaagttacaaggc";`



- `s = genome.substring(1, 5);`
- `t = genome.substring(9, 13);`

`s` and `t` are different strings that share the same value "acaa".


- `(s == t)` is false, but `(s.equals(t))` is true.

`compares addresses` `compares character sequences`

38

Bird's Eye View (Revisited)

In and Out

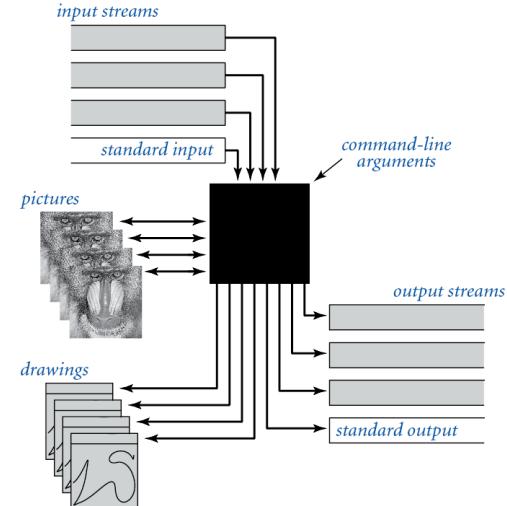

40

Non-Standard Input

Standard input. Read from terminal window.

Goal. Read from **several** different input streams.

In data type. Read text from stdin, a file, a web site, or network.

Ex: Are two text files identical?


```
public class Diff
{
    public static void main(String[] args)
    {
        In in0 = new In(args[0]);
        In in1 = new In(args[1]);
        String s = in0.readAll();
        String t = in1.readAll();
        StdOut.println(s.equals(t));
    }
}
```

↙ or use OS to redirect from one file

Screen Scraping

Goal. Find current stock price of Google.

Step 1. Find web source.

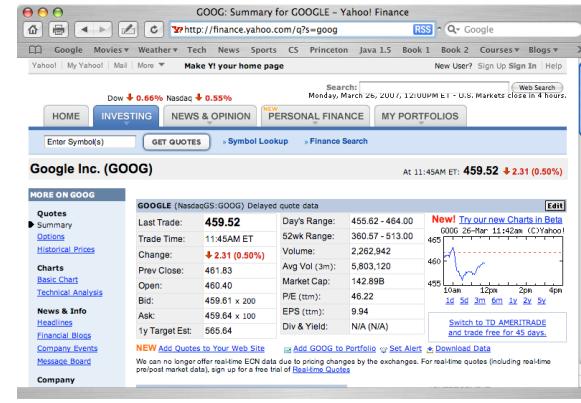

41

42

Screen Scraping

Goal. Find current stock price of Google.

Step 2. Find string representation (HTML code) of web source.

```
...
<tr>
<td class="yfnc_tablehead1" width="48%">
Last Trade:
</td>
<td class="yfnc_tabledata1">
<b>
<>459.52</b> ←
</b>
</td>
</tr>
<tr>
<td class="yfnc_tablehead1" width="48%">
Trade Time:
</td>
<td class="yfnc_tabledata1">
11:45AM ET
</td>
</tr>
...

```

price is string between and after "Last Trade"

43

Screen Scraping

Goal. Find current stock price of Google.

Step 3. Write code to extract stock price from HTML code.

```
public class StockQuote
{
    public static void main(String[] args)
    {
        String name = "http://finance.yahoo.com/q?s=";
        In in = new In(name + args[0]);
        String input = in.readAll();
        int start = input.indexOf("Last Trade:", 0);
        int from = input.indexOf("<b>", start);
        int to = input.indexOf("</b>", from);
        String price = input.substring(from + 3, to);
        StdOut.println(price);
    }
}
```

price is string between and after "Last Trade"

% java StockQuote goog
459.52

- `s.indexOf(t, i)`: index of first occurrence of `t` in `s`, starting at offset `i`.
- Read raw html from `http://finance.yahoo.com/q?s=goog`.
- Find first string delimited by `` and `` after "Last Trade:".

44

Day Trader

Add bells and whistles.

- Plot price in real-time.
- Notify user if price dips below a certain price.
- Embed logic to determine when to buy and sell.
- Automatically send buy and sell orders to trading firm.

Warning. Use at your own financial risk.



The New Yorker, September 6, 1999

45

OOP Summary

Object. Holds a data type value; variable name refers to object.

In Java, programs manipulate references to objects.

- Exception: primitive types, e.g., boolean, int, double.
- Reference types: string, Picture, Color, arrays, everything else.
- OOP purist: language should not have separate primitive types.

Bottom line.

Today, you learned to write programs that manipulate colors, pictures, strings, and I/O streams.

Next time.

You will learn to define **your own abstractions** and to write programs that manipulate them.

46