


COS 318: Operating Systems

CPU Scheduling


Jaswinder Pal Singh and a Fabulous Course Staff
Computer Science Department
Princeton University

(<http://www.cs.princeton.edu/courses/cos318/>)



Today's Topics


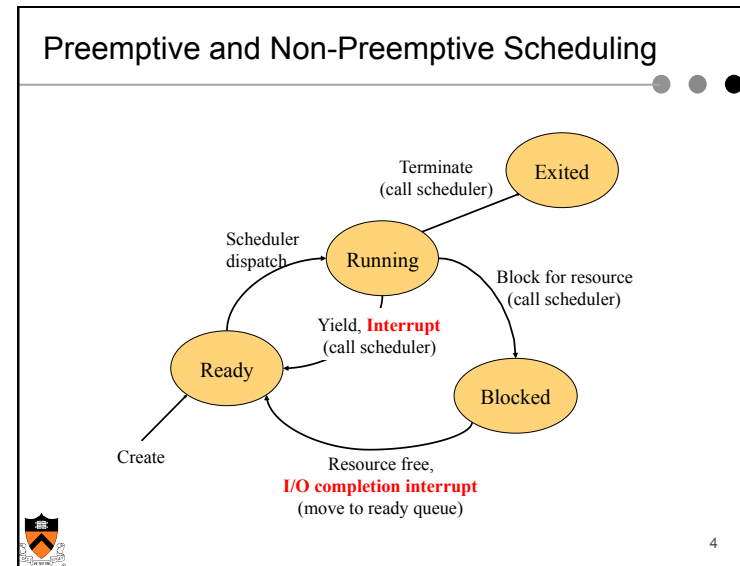
- ◆ CPU scheduling basics
- ◆ CPU scheduling algorithms



2

CPU Scheduler

- ◆ Selects from among the processes/threads that are ready to execute (in *ready* state), and allocates the CPU to one of them (puts in *running* state).
- ◆ CPU scheduling can be *non-preemptive* or *pre-emptive*
- ◆ *Non-preemptive* scheduling decisions may take place when a process changes state:
 1. switches from running to waiting state
 2. switches from running to ready state
 3. switches from waiting to ready
 4. terminates
- ◆ All other scheduling is *preemptive*
 - E.g. may be driven by an interrupt

Scheduling Criteria

- ◆ Assumptions made here
 - One process per user and one thread per process
 - Processes are independent
- ◆ Scheduling Goals
 - Minimize response time (interactive) or turnaround time (batch)
 - Time from submission of job/operation to its completion
 - Job/operation could be keystroke in editor or running a big science simulation
 - Maximize throughput (operations/jobs per second)
 - Minimize overhead (e.g. context switching)
 - Use system resources efficiently (CPU, memory, disk, etc)
 - Fairness and proportionality
 - Share CPU in some equitable way, or that meets users' expectations
 - Everyone makes some progress; no one starves



Some Problem Cases in Scheduling

- ◆ Scheduler completely blind about job types
 - Little overlap between CPU and I/O
- ◆ Optimization involves favoring jobs of type "A" over "B"
 - Lots of A's? B's starve
- ◆ Interactive process gets trapped behind others
 - Response time bad for no good reason.
- ◆ Priorities: A depends on B and A's priority > B's
 - B never runs, so A doesn't continue



6

Scheduling Algorithms

- ◆ Simplified view of scheduling:
 - Save process state (to PCB)
 - **Pick which process to run next**
 - Dispatch process



7

First-Come-First-Serve (FCFS) Policy

- ◆ Schedule tasks in the order they arrive
 - Run them until completion or they block or they yield
- ◆ Example 1
 - P1 = 24 sec, P2 = 3 sec, and P3 = 3 sec, submitted 'same' time in that order
 - Avg. response time = $(24+27+30)/3 = 27$. Avg. wait time = $(0+24+27)/3 = 17$



- ◆ Example 2
 - Same jobs but come in different order: P2, P3 and P1
 - Average response time = $(3 + 6 + 30) / 3 = 13$ sec, avg wait time: 3 sec



- ◆ FIFO pro: Simple. Con: Short jobs get stuck behind long ones



Shortest Job First (SJF) Scheduling

- ◆ Whenever scheduling decision is to be made, schedule process with shortest remaining time to completion
 - Non-preemptive case: straightforward (if time can be estimated)
 - Preemptive case: if new process arrives with smaller remaining time, preempt running process and schedule new one
- ◆ Simple example
 - P1 = 6sec, P2 = 8sec, P3 = 7sec, P4 = 3sec
 - All arrive at the same time




- ◆ Can you do better than SRTCF in terms of average response time?
- ◆ Issues with this approach?



Example of non-preemptive SJF

Process	Arrival Time	Burst Time
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4

- ◆ SJF (non-preemptive)




- ◆ Average waiting time = $(0 + 6 + 3 + 7)/4 = 4$



Example of preemptive SJF

Process	Arrival Time	Burst Time
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4


- ◆ SJF (preemptive)



- ◆ Average waiting time = $(9 + 1 + 0 + 2)/4 = 3$



Round Robin

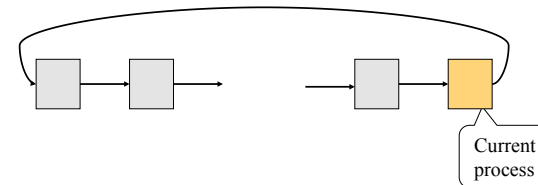

- ◆ Similar to FCFS, but with a time slice for timer interrupt
 - Time-interrupted process is moved to end of queue
- ◆ FCFS for preemptive scheduling
- ◆ Real systems also have I/O interrupts in the mix
- ◆ How do you choose time slice?



FCFS vs. Round Robin

- ◆ Example
 - 10 jobs and each takes 100 seconds
- ◆ FCFS (non-preemptive scheduling)
 - job 1: 100s, job2: 200s, ... , job10: 1000s
- ◆ Round Robin (preemptive scheduling)
 - time slice 1sec and no overhead
 - job1: 991s, job2: 992s, ... , job10: 1000s
- ◆ Comparisons
 - Round robin is much worse (avg turnaround time) for jobs about the same length
 - Both are fair, but RR is bad in the case where FIFO is optimal
 - But, e.g. for streaming video, RR is good, since everyone makes progress and gets a share “all the time”




Resource Utilization Example

- ◆ A, B, and C run forever (in this order)
 - A and B each uses 100% CPU forever
 - C is a CPU plus I/O job (1ms CPU + 10ms disk I/O)
- ◆ Time slice 100ms
 - A (100ms CPU), B (100ms CPU), C (1ms CPU + 10ms I/O), ...
- ◆ Time slice 1ms
 - A (1ms CPU), B (1ms CPU), C (1ms CPU), A (1ms CPU), B (1ms CPU), C(10ms I/O) || A, B, ..., A, B
- ◆ What do we learn from this example?



Virtual Round Robin

- ◆ I/O bound processes go to auxiliary queue (instead of ready queue) to get scheduled
- ◆ Aux queue is FIFO
- ◆ Aux queue has preference over ready queue

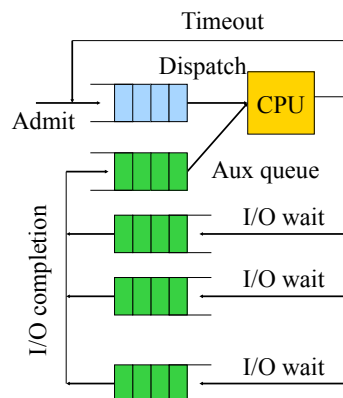

16




Priority Scheduling

- ◆ Not all processes are equal, so rank them
- ◆ The method
 - Assign each process a priority
 - Run the process with highest priority in the ready queue first
 - Adjust priority dynamically (I/O wait raises the priority, reduce priority as process runs)
- ◆ Why adjusting priorities dynamically
 - T1 at priority 4, T2 at priority 1 and T2 holds lock L
 - Scenario
 - T1 tries to acquire L, fails, blocks.
 - T3 enters system at priority 3.
 - T2 never gets to run, and T1 is never unblocked

17



Multi-level Feedback Queues (MFQ)

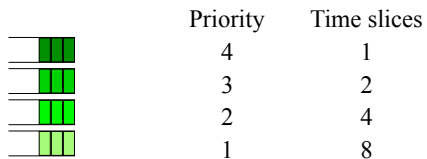

- ◆ Round-robin queues, each with different priority
- ◆ Higher priority queues have shorter time slices
- ◆ Jobs start at highest priority queue
- ◆ If timeout expires, drop one level
- ◆ If timeout doesn't expire, stay or pushup one level
- ◆ What does this method do?




Lottery Scheduling

- ◆ Motivations
 - SJF does well with average response time, but is unfair (long jobs can be starved)
 - Need a way to give everybody *some* chance of running
- ◆ Lottery method
 - Give each job a number of tickets
 - Randomly pick a winning ticket
 - To approximate SJF, give short jobs more tickets
 - To avoid starvation, give each job at least one ticket
 - Cooperative processes can exchange tickets



Multiprocessor and Cluster

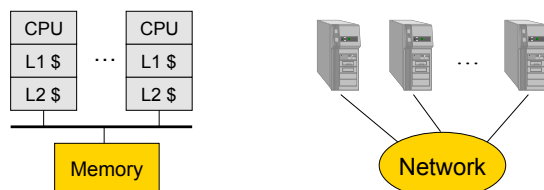

Multiprocessor architecture

- ◆ Cache coherence
- ◆ Single OS

Cluster or multicomputer

- ◆ Distributed memory
- ◆ An OS in each box



20

Multiprocessor/Cluster Scheduling

- ◆ Design issue
 - Process/thread to processor assignment
- ◆ Gang scheduling (co-scheduling)
 - Threads of the same process will run together
 - Processes of the same application run together
- ◆ Dedicated processor assignment
 - Threads will be running on specific processors to completion
 - Is this a good idea?



21

Real-Time Scheduling

◆ Two types of real-time

- Hard deadline
 - Must meet, otherwise can cause fatal error
- Soft Deadline
 - Meet most of the time, but not mandatory

◆ Admission control

- Take a real-time process only if the system can guarantee the “real-time” behavior of all processes.
- Assume periodic processes. The jobs are schedulable, if the following holds:

$$\sum \frac{C_i}{T_i} \leq 1$$

where C_i = computation time, and T_i = period



22

Rate Monotonic Scheduling (Liu & Layland 73)

◆ Assumptions

- Each periodic process must complete within its period
- No process is dependent on any other process
- A process needs same amount of CPU time on each burst
- Non-periodic processes have no deadlines
- Process preemption occurs instantaneously (no overhead)

◆ Main ideas of RMS

- Assign each process a fixed priority = frequency of occurrence
- Run the process with highest priority

◆ Example

- P1 runs every 30ms gets priority 33 (33 times/sec)
- P2 runs every 50ms gets priority 20 (20 times/sec)



23

Earliest Deadline Scheduling

◆ Assumptions

- When a process needs CPU time, it announces its deadline
- No need to be periodic process
- CPU time needed may vary

◆ Main idea of EDS

- Sort ready processes by their deadlines
- Run the first process on the list (earliest deadline first)
- When a new process is ready, it preempts the current one if its deadline is closer

◆ Example

- P1 needs to finish by 30sec, P2 by 40sec and P3 by 50sec
- P1 goes first
- More in MOS 7.4.4



24

BSD 4.3 Scheduling with Multi-Queue

◆ “1 sec” preemption

- Preempt if a process doesn't block or complete within 1 sec

◆ Priority is recomputed every second

- $P_i = \text{base} + (\text{CPU}_{i-1}) / 2 + \text{nice}$, where $\text{CPU}_i = (\text{U}_i + \text{CPU}_{i-1}) / 2$
- Base is the base priority of the process
- U_i is process utilization in interval i

◆ Priorities

- Swapper
- Block I/O device control
- File operations
- Character I/O device control
- User processes



25

Linux Scheduling

- ◆ Time-sharing scheduling
 - Each process has a priority and # of credits
 - Process with the most credits will run next
 - I/O event increases credits
 - A timer interrupt causes a process to lose a credit, until zero credits reached at which time process is interrupted
 - If no process has credits, then the kernel issues credits to all processes: $\text{credits} = \text{credits}/2 + \text{priority}$
- ◆ Real-time scheduling
 - Soft real-time (really just higher priority threads: FIFO or RR)
 - Kernel cannot be preempted by user code



26

Windows Scheduling

- ◆ Classes and priorities
 - Real time: 16 static priorities
 - Variable: 16 variable priorities, start at a base priority
 - If a process has used up its quantum, lower its priority
 - If a process waits for an I/O event, raise its priority
- ◆ Priority-driven scheduler
 - For real-time class, do round robin within each priority
 - For variable class, do multiple queue
- ◆ Multiprocessor scheduling
 - For N processors, run N-1 highest priority threads on N-1 processors and run remaining threads on a single processor
 - A thread will wait for processors in its affinity set, if there are other threads available (for variable priorities)



27

Summary

- ◆ Best algorithms may depend on your primary goals
 - FIFO simple, optimal avg response time for tasks of equal size, but can be poor avg response time if tasks vary a lot in size
 - SJF gives the minimal average response time, but can be not great in variance of response times
 - RR has very poor avg response time for equal size tasks, but is close to SJF for variable size tasks
 - Small time slice is important for improving I/O utilization
 - If tasks have mix of processing and I/O, do well under SJF but can do poorly under RR
 - Priority and its variations are used in most systems
 - Lottery scheduling is flexible
 - Multi-queue can achieve a good balance
 - Admission control is important in real-time scheduling



28