



Implicit Surfaces & Solid Representations

COS 426, Fall 2022

3D Object Representations




- Raw data
 - Range image
 - Point cloud
- Surfaces
 - Polygonal mesh
 - Subdivision
 - Parametric
 - **Implicit**
- Solids
 - Voxels
 - BSP tree
 - CSG
 - Sweep
- High-level structures
 - Scene graph
 - Application specific

3D Object Representations



- Desirable properties of an object representation
 - Easy to acquire
 - Accurate
 - Concise
 - Intuitive editing
 - Efficient editing
 - Efficient display
 - Efficient intersections
 - Guaranteed validity
 - Guaranteed smoothness
 - etc.

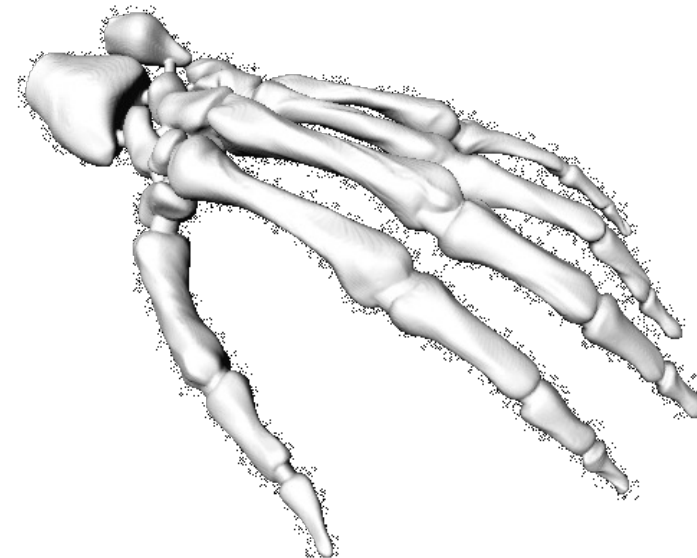


Large Geometric Model Repository
Georgia Tech

3D Object Representations



- Desirable properties of an object representation
 - Easy to acquire
 - Accurate
 - Concise
 - Intuitive editing
 - Efficient editing
 - Efficient display
 - Efficient intersections
 - Guaranteed validity
 - Guaranteed smoothness
 - etc.

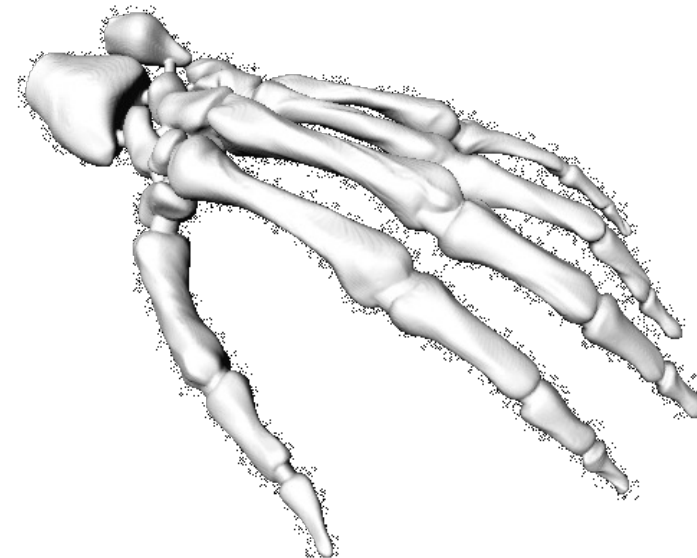

Large Geometric Model Repository
Georgia Tech

Implicit Surfaces



- Represent surface with function over all space



Kazhdan

Implicit Surfaces




- Surface defined implicitly by function



Implicit Surfaces






- Surface defined implicitly by function:
 - $f(x, y, z) = 0$ (on surface)
 - $f(x, y, z) < 0$ (inside)
 - $f(x, y, z) > 0$ (outside)

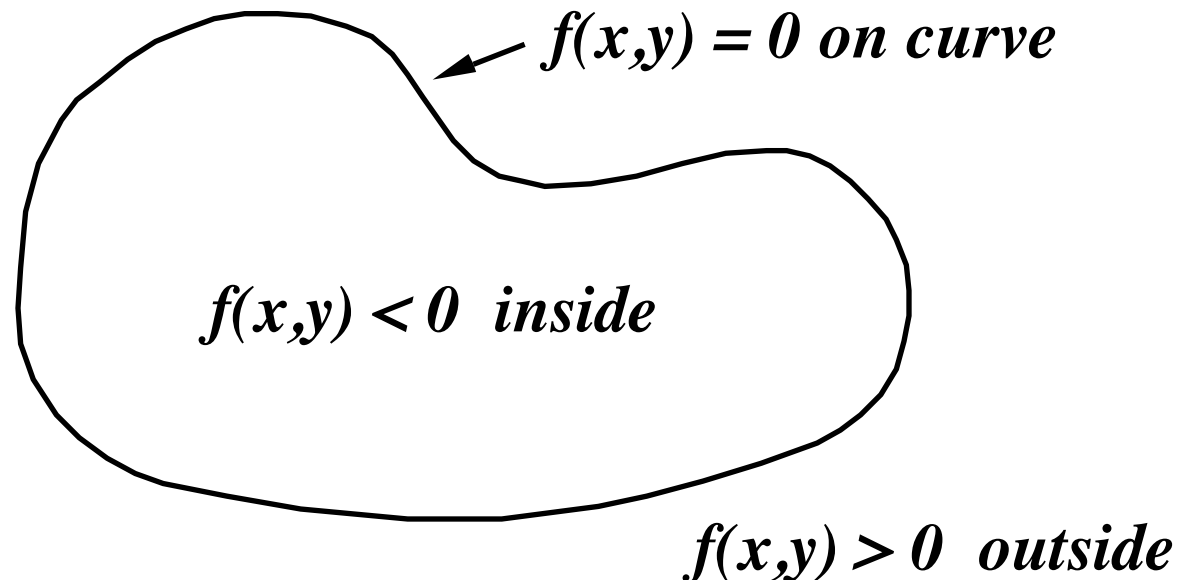

Implicit Surfaces




- Normals defined by partial derivatives
 - Normal $N(x, y, z) = \text{normalize} \left(\frac{\partial F}{\partial x}, \frac{\partial F}{\partial y}, \frac{\partial F}{\partial z} \right) = \text{normalize}(\vec{\nabla} F)$
 - » Example: circle $x^2 + y^2 - 3^2 = 0$
 - » Proof: straight forward with an arbitrary curve $\Gamma(t)$ and the chain rule
 - » Max change rate direction of F perpendicular direction

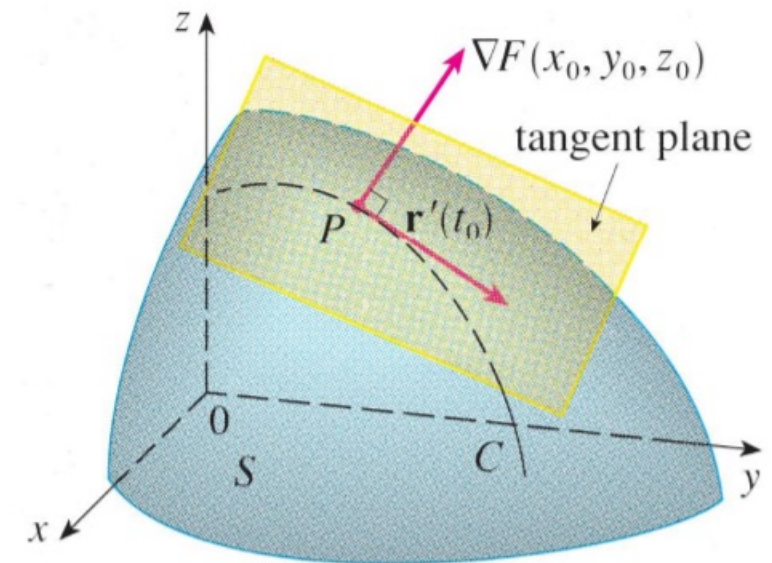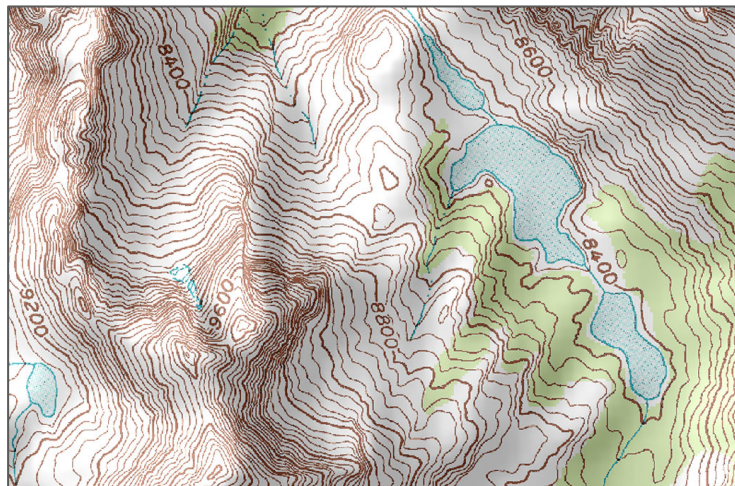


Implicit Surfaces




- Normals defined by partial derivatives
 - Normal $N(x, y, z) = \text{normalize} \left(\frac{\partial F}{\partial x}, \frac{\partial F}{\partial y}, \frac{\partial F}{\partial z} \right) = \text{normalize}(\vec{\nabla} F)$
 - Tangent $r = N_P \times N$
 - » on specific plane P, with normal N_P
 - » Otherwise infinite directions



Normals



Tangents

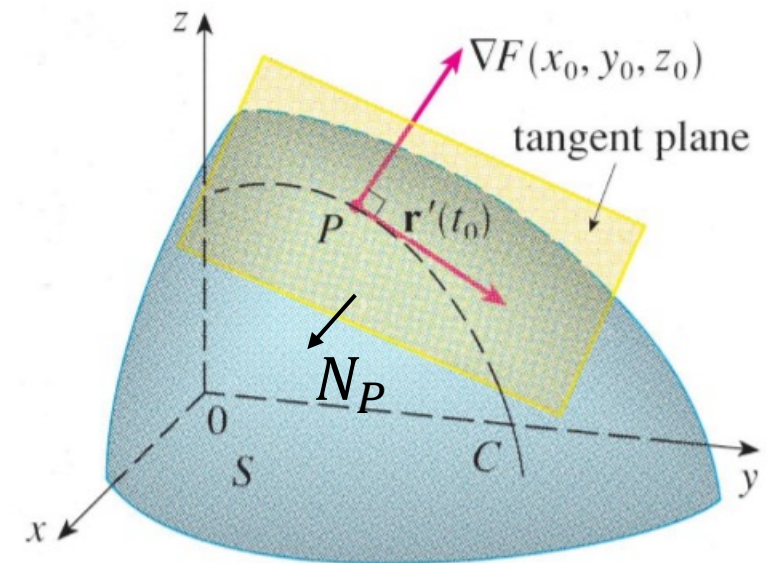


Implicit Surface Properties



(1) Efficient check for whether point is inside

- Evaluate $f(x,y,z)$ to see if point is inside/outside/on
- Example: ellipsoid

$$f(x, y, z) = \left(\frac{x}{r_x}\right)^2 + \left(\frac{y}{r_y}\right)^2 + \left(\frac{z}{r_z}\right)^2 - 1$$

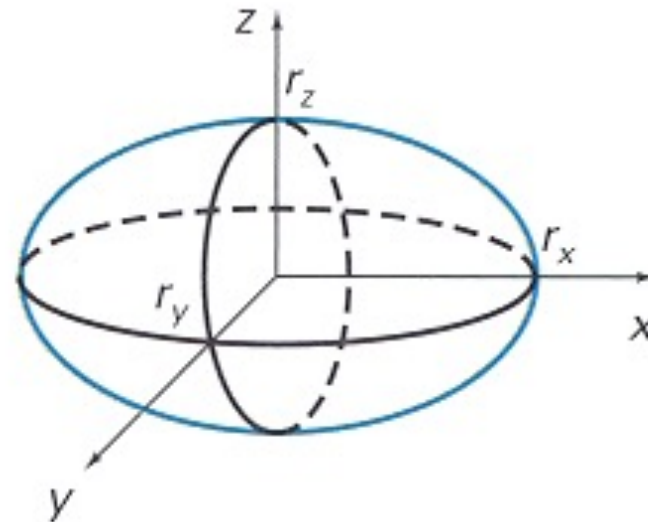

H&B Figure 10.10

Implicit Surface Properties



(2) Efficient surface intersections

- Substitute to find intersections

Ray: $P = P_0 + tV$

Sphere: $|P - O|^2 - r^2 = 0$

Substituting for P , we get:

$$|P_0 + tV - O|^2 - r^2 = 0$$

Solve quadratic equation:


$$at^2 + bt + c = 0$$

where:

$$a = 1$$

$$b = 2 V \cdot (P_0 - O)$$

$$c = |P_0 - O|^2 - r^2 = 0$$

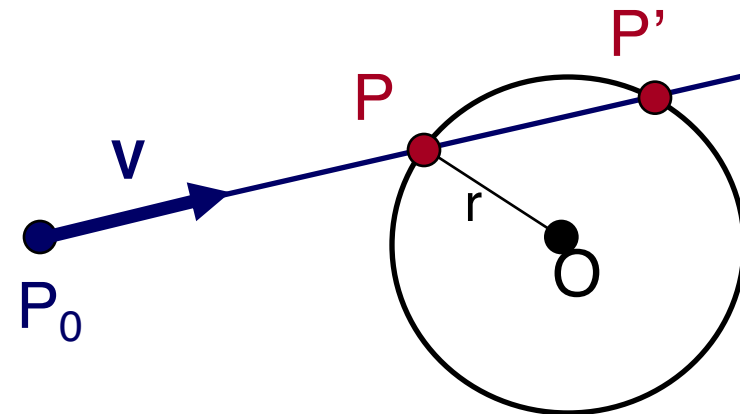


Implicit Surface Properties




(3) Efficient boolean operations (CSG)

- How would you implement:
Union? Intersection? Difference?

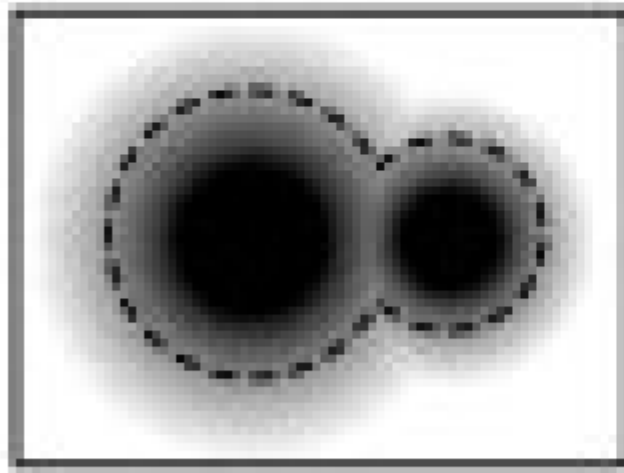

Union

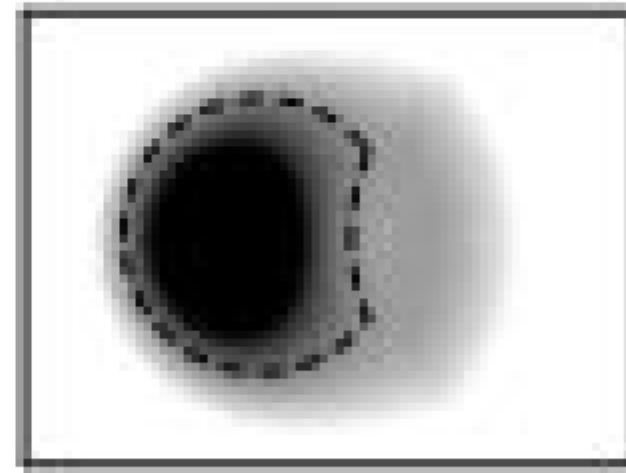


Difference

Implicit Surface Properties



(4) Efficient topology changes

- Surface is not represented explicitly!

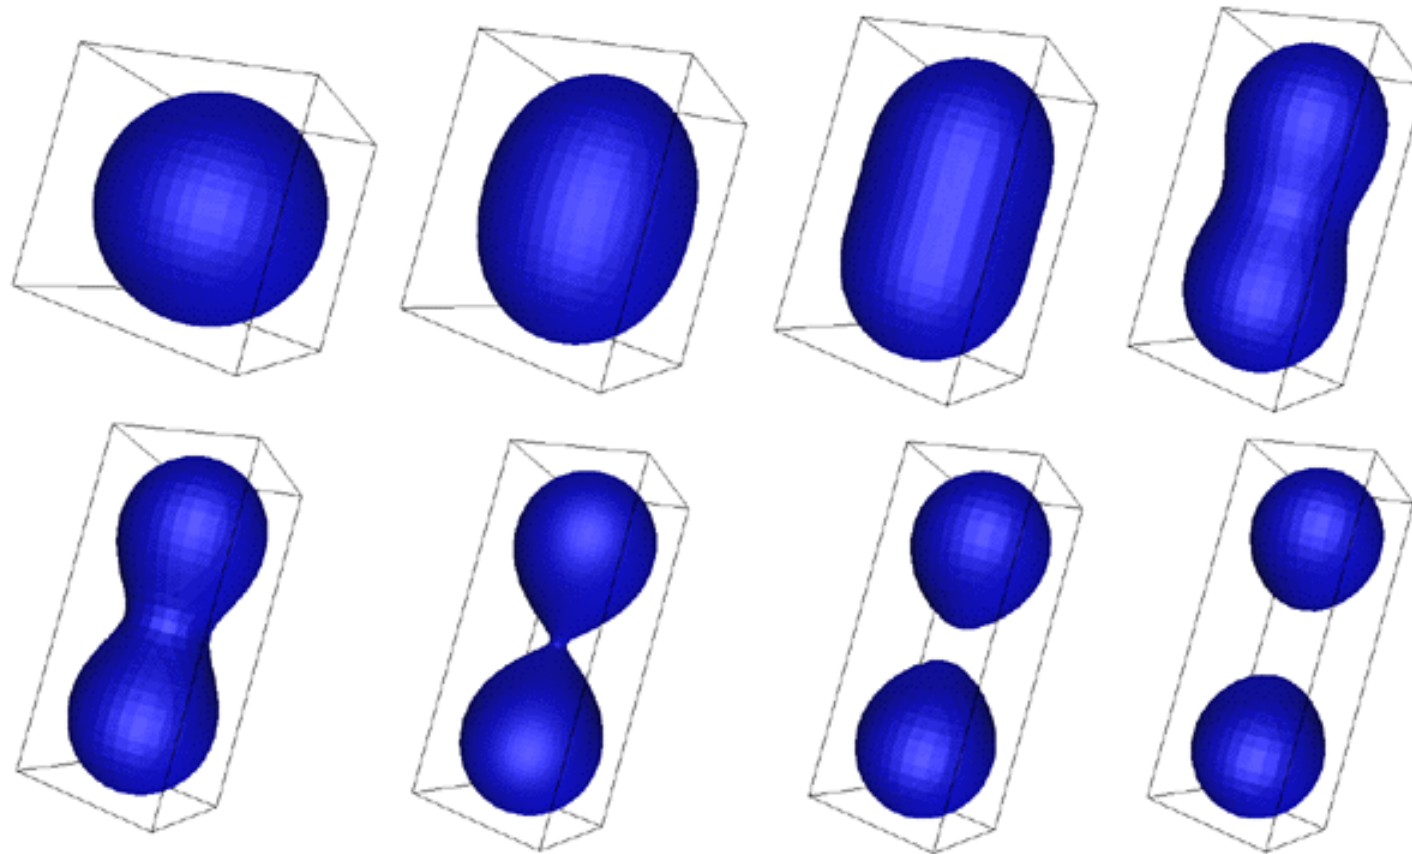







Bourke

Implicit Surface Properties



(4) Efficient topology changes

- Surface is not represented explicitly!

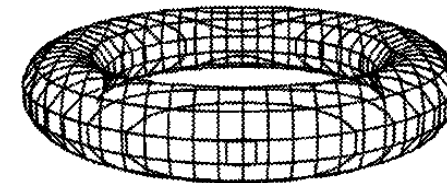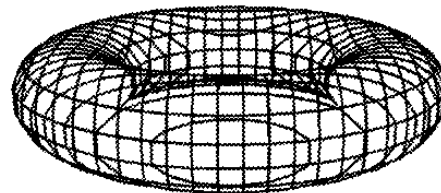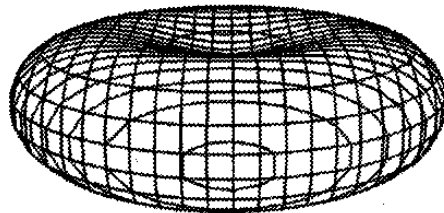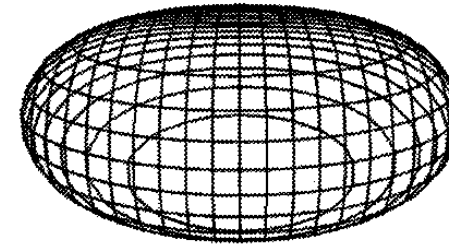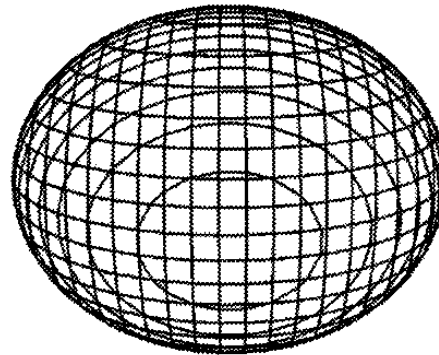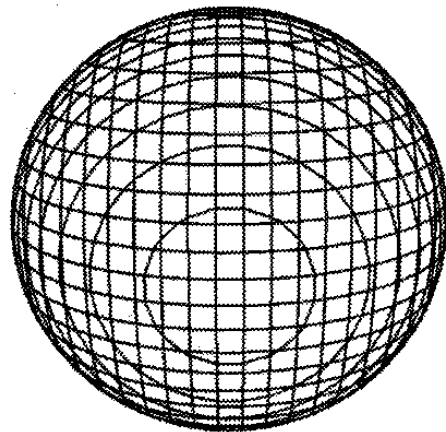


Implicit Surface Properties




(5) Computations in the volume

- Allows for continuity and smoothness
- Suitable for tasks such as reconstruction

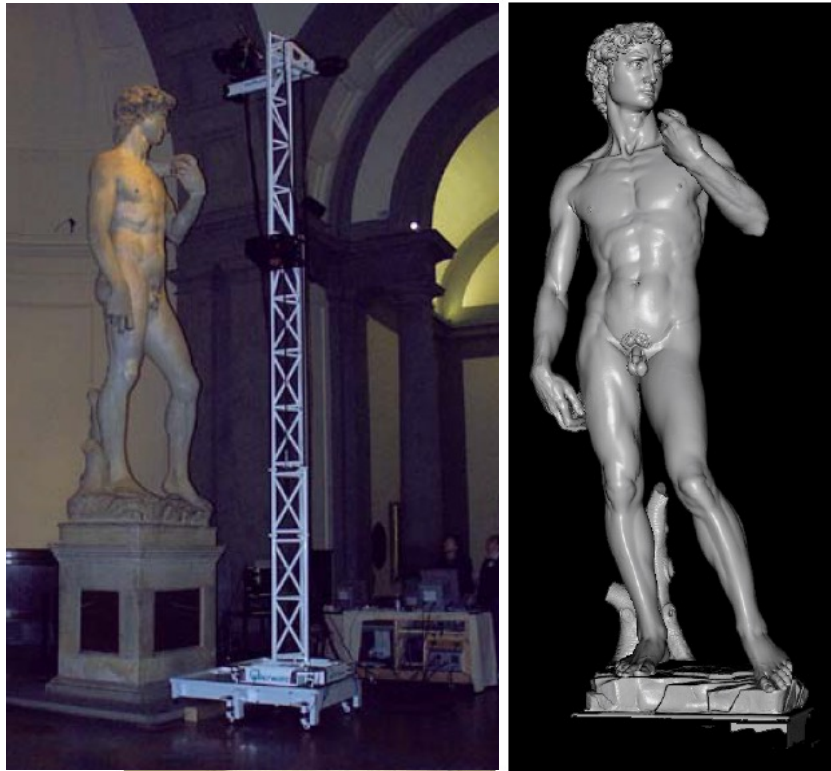

1G sample points $\rightarrow$ 8M triangles

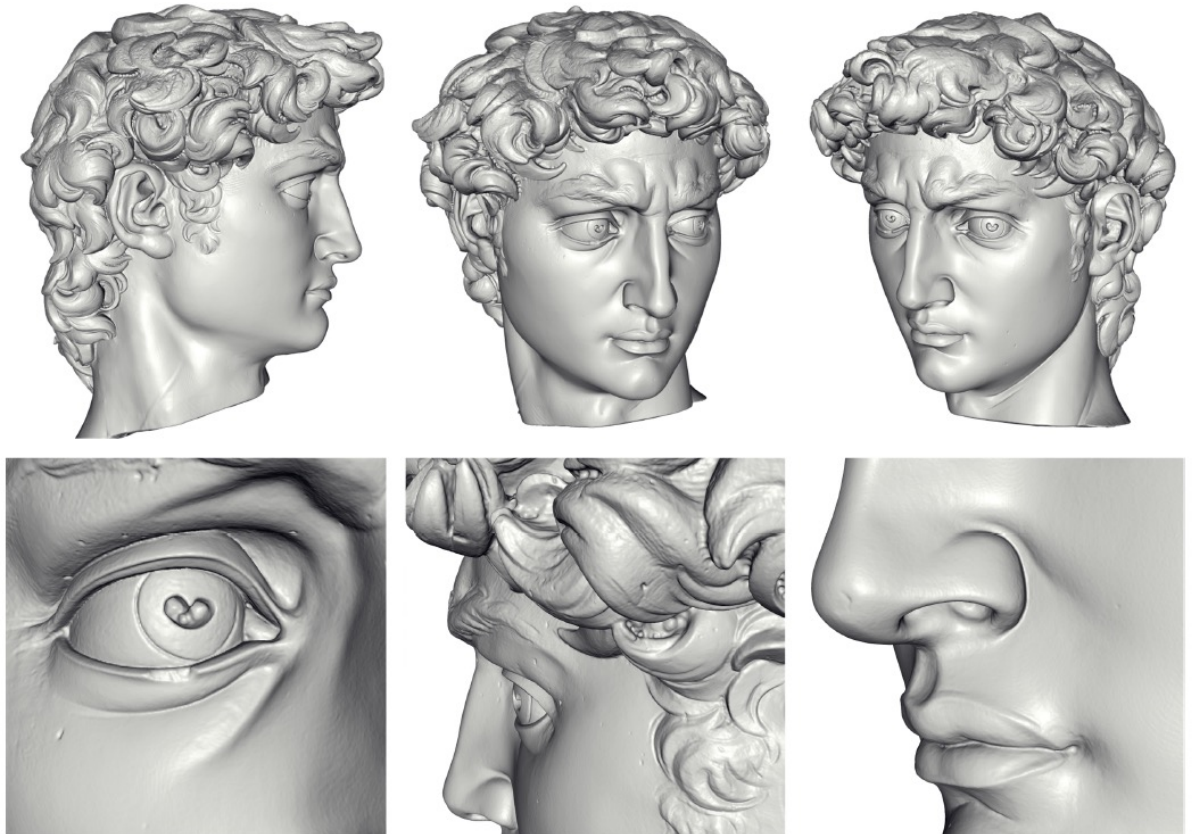

Poisson Surface Reconstruction [Kazhdan 06]

Example: Simulation → Intersection Computation



Hierarchical *hp*-Adaptive Signed Distance Fields

Dan Koschier, Crispin Deul and Jan Bender

Comparison to Parametric Surfaces



- Implicit
 - Efficient intersections & topology changes
- Parametric
 - Efficient “marching” along surface & rendering

Implicit Surface Representations



- How do we define implicit function?
 - $f(x,y,z) = ?$

Implicit Surface Representations



- How do we define implicit function?
 - Algebraics
 - Voxels
 - Basis functions
 - Neural Networks

Implicit Surface Representations




- How do we define implicit function?
 - Algebraics
 - Voxels
 - Basis functions
 - Neural Networks

Algebraic Surfaces



- Implicit function is polynomial
 - $f(x,y,z)=ax^d+by^d+cz^d+dx^{d-1}y+dx^{d-1}z+dy^{d-1}x+\dots$

$$f(x,y,z) = \left(\frac{x}{r_x}\right)^2 + \left(\frac{y}{r_y}\right)^2 + \left(\frac{z}{r_z}\right)^2 - 1$$

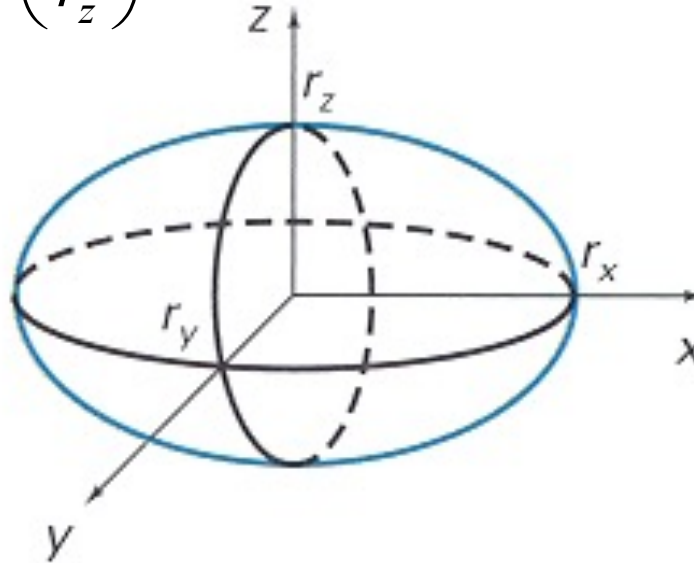

H&B Figure 10.10

Algebraic Surfaces



- Most common form: quadrics
 - $f(x,y,z)=ax^2+by^2+cz^2+2dxy+2eyz+2fxz+2gx+2hy+2jz+k$
- Examples
 - Sphere
 - Ellipsoid
 - Paraboloid
 - Hyperboloid




<http://tutorial.math.lamar.edu/Classes/CalcIII/QuadricSurfaces.aspx>


Algebraic Surfaces




- Higher degree algebraics

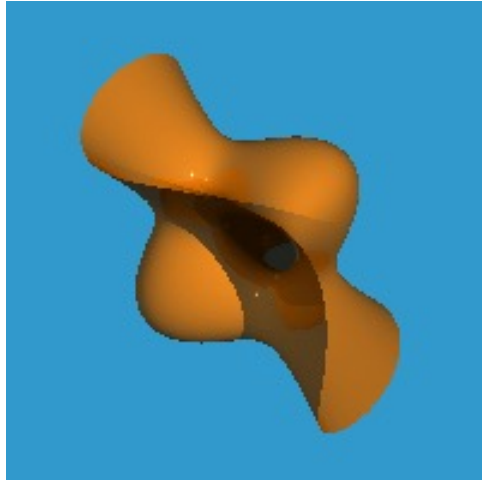

Cubic

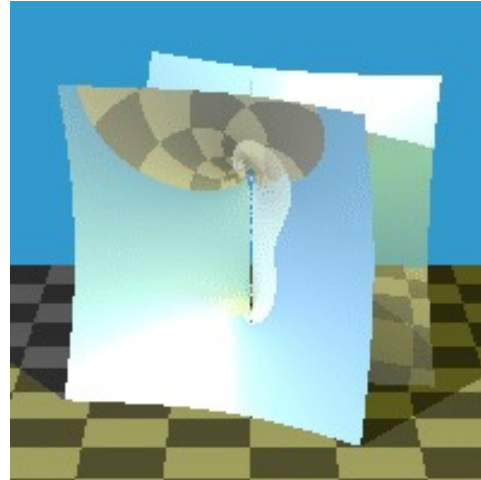

Quartic

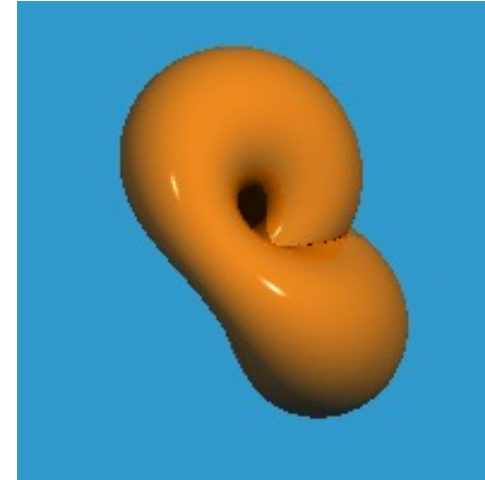


Degree six

Algebraic Surfaces



- Equivalent parametric surface
 - Tensor product patch of degree m and n curves yields algebraic function with degree $2mn$

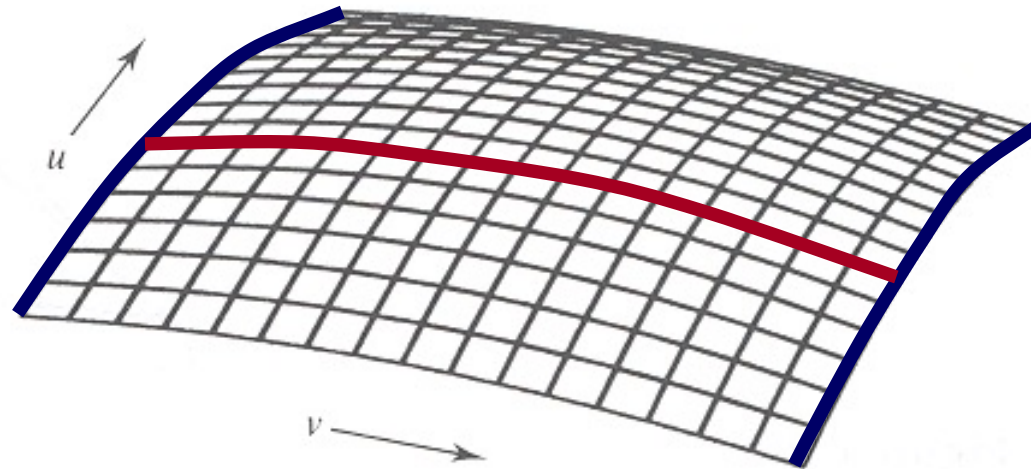


Bicubic patch has degree 18!

Algebraic Surfaces



- Intersection
 - Intersection of degree m and n algebraic surfaces yields curve with degree mn

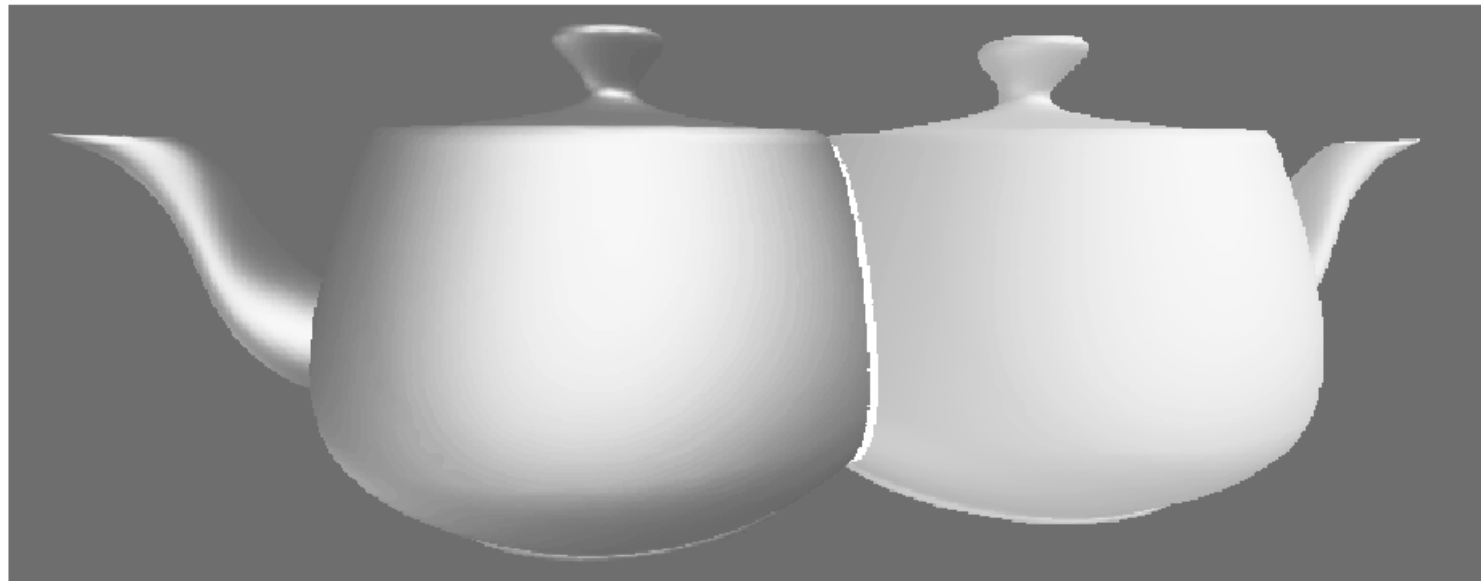


Intersection of bicubic patches has degree 324!

Algebraic Surfaces



- Function extends to infinity
 - Must trim to get desired patch (this is difficult!)

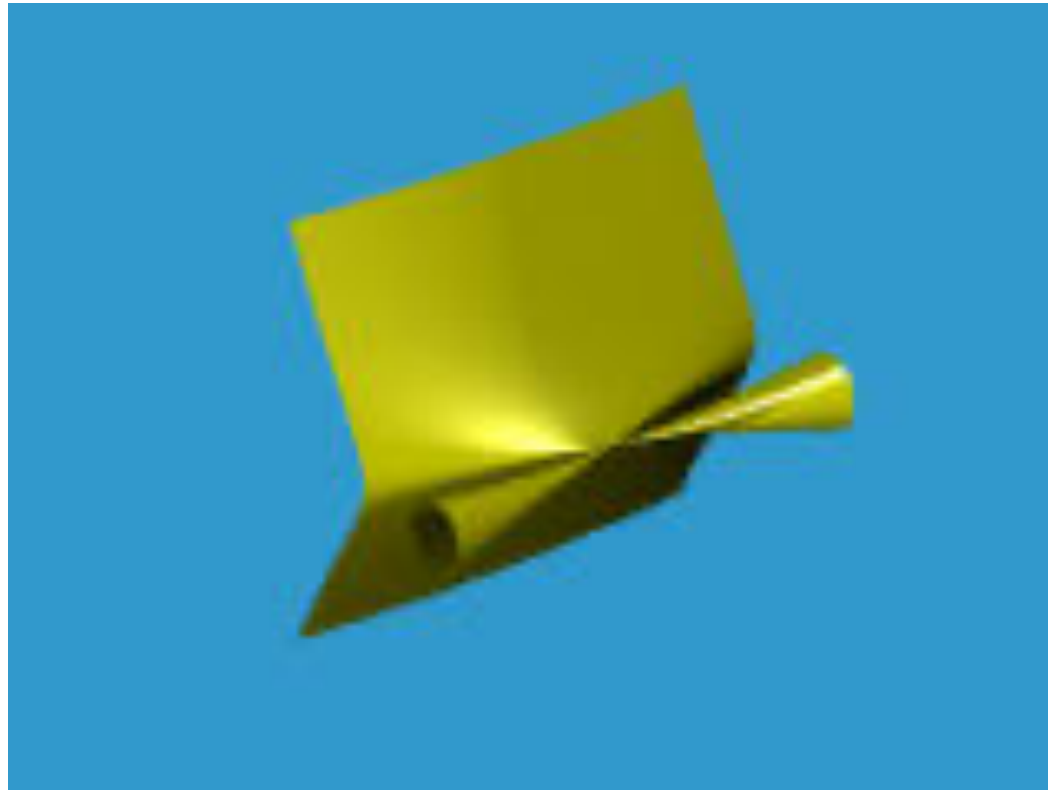

Implicit Surface Representations




- How do we define implicit function?
 - Algebraics
 - Voxels
 - Basis Functions
 - Neural Networks

Voxels




- Regular array of 3D samples (like image)
 - Samples are called *voxels* (“**v**olume **p**ixels”)

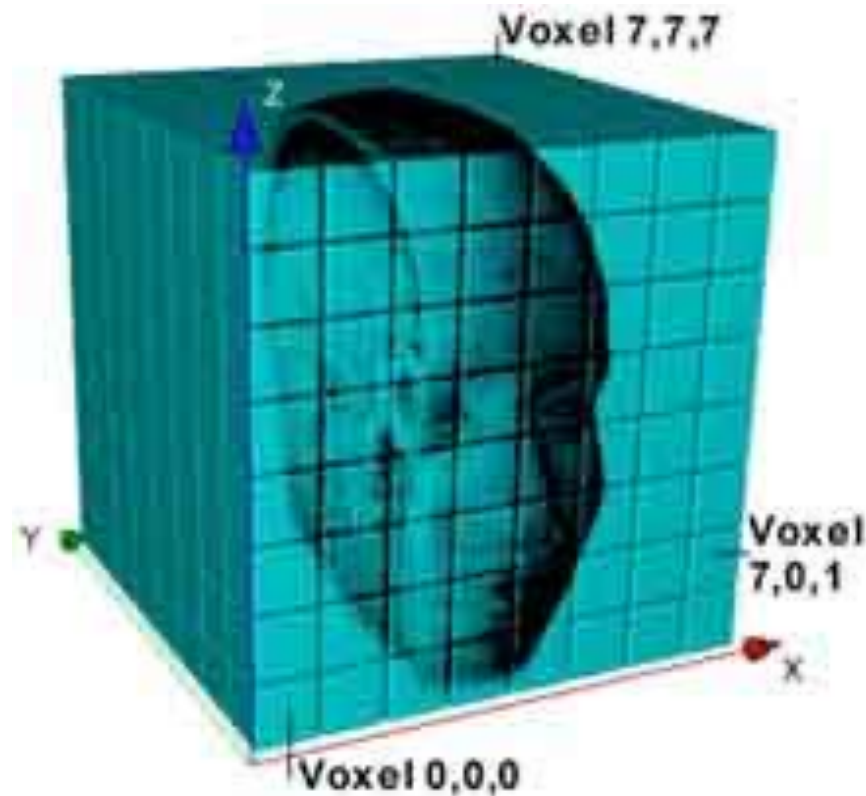

Voxels





- Regular array of 3D samples (like image)
 - Applying reconstruction filter (e.g. trilinear) yields $f(x,y,z)$
 - Isosurface at $f(x,y,z) = 0$ defines surface

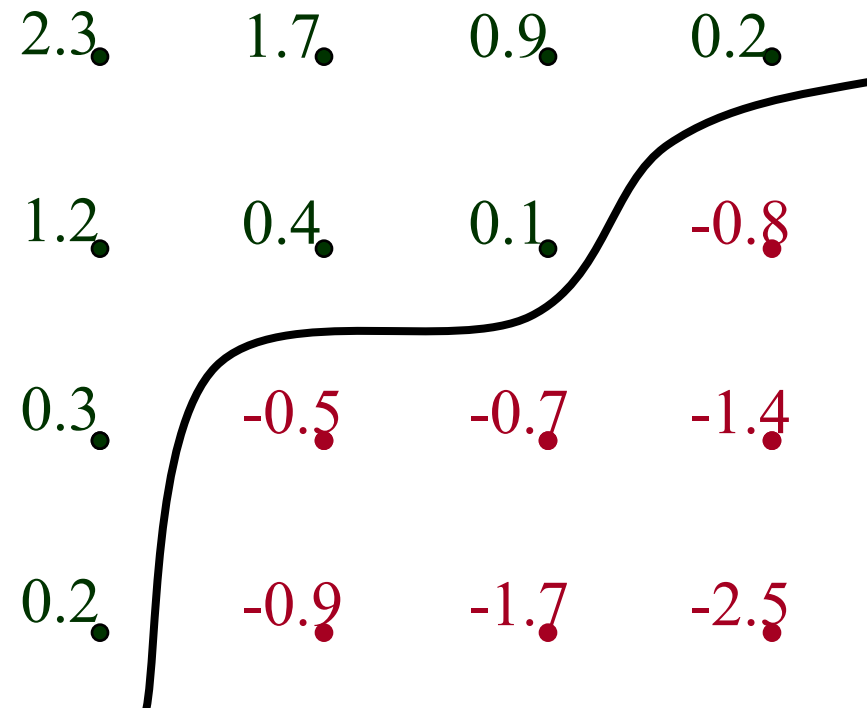

Voxels





- Iso-surface extraction algorithm
 - e.g., Marching cubes

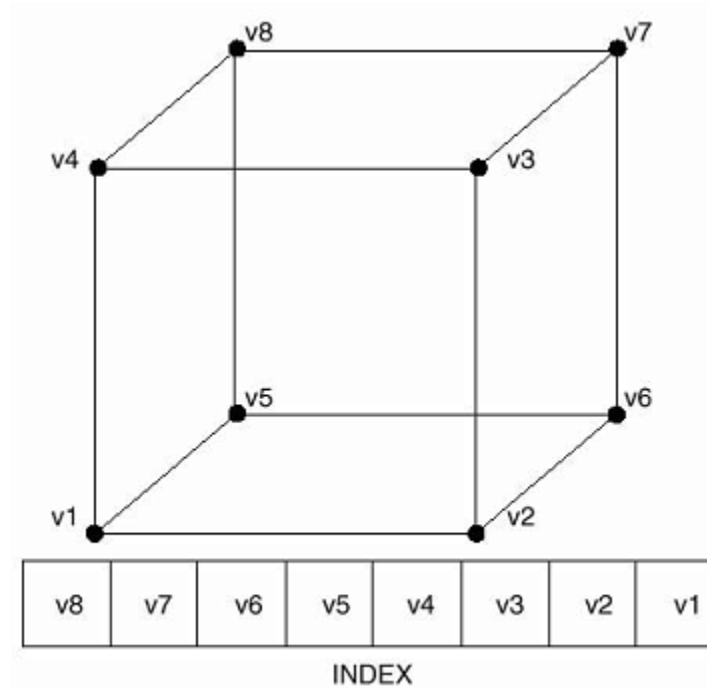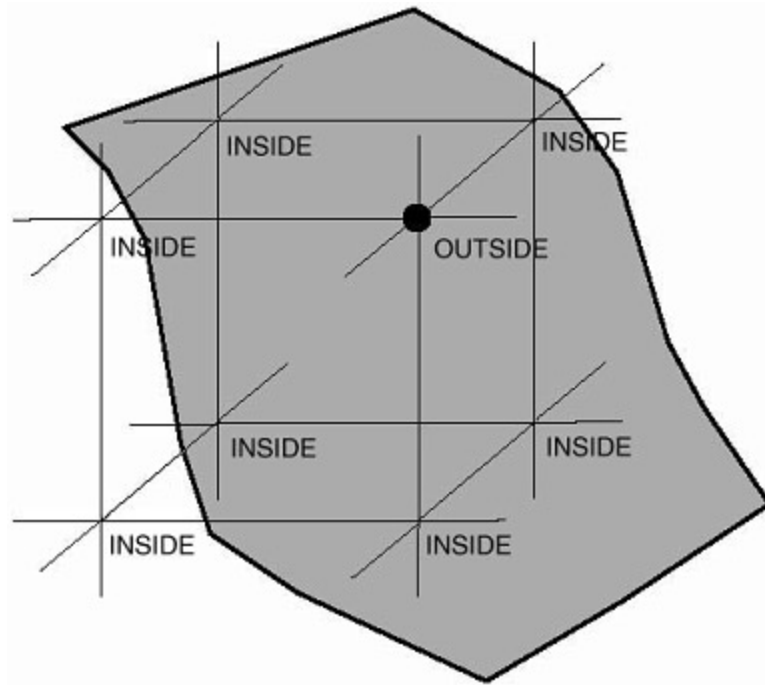

Voxels




- Iso-surface extraction algorithm
 - e.g., Marching cubes (15 cases)

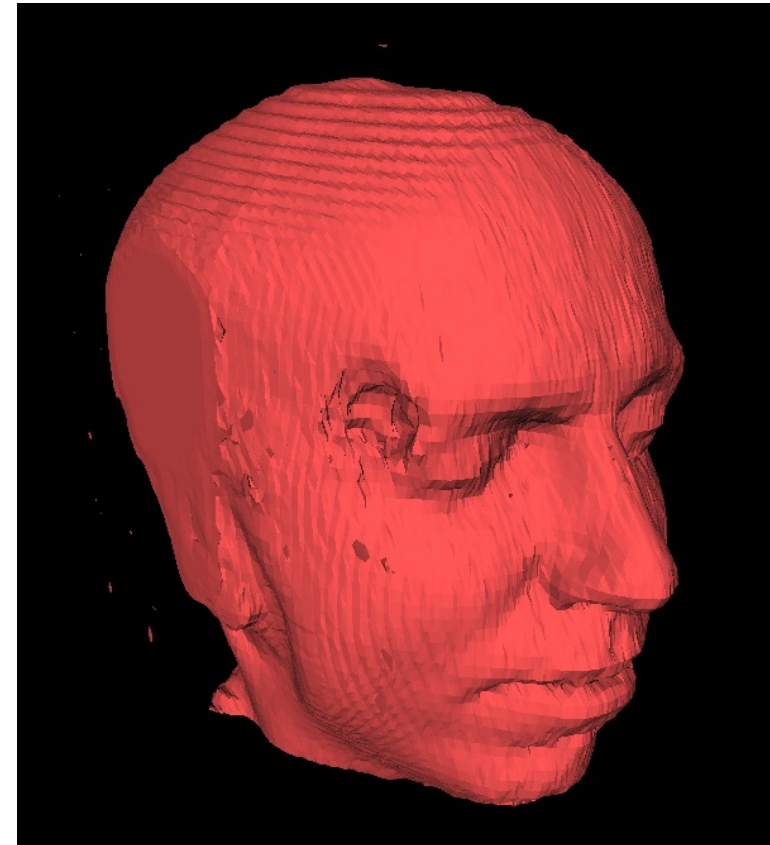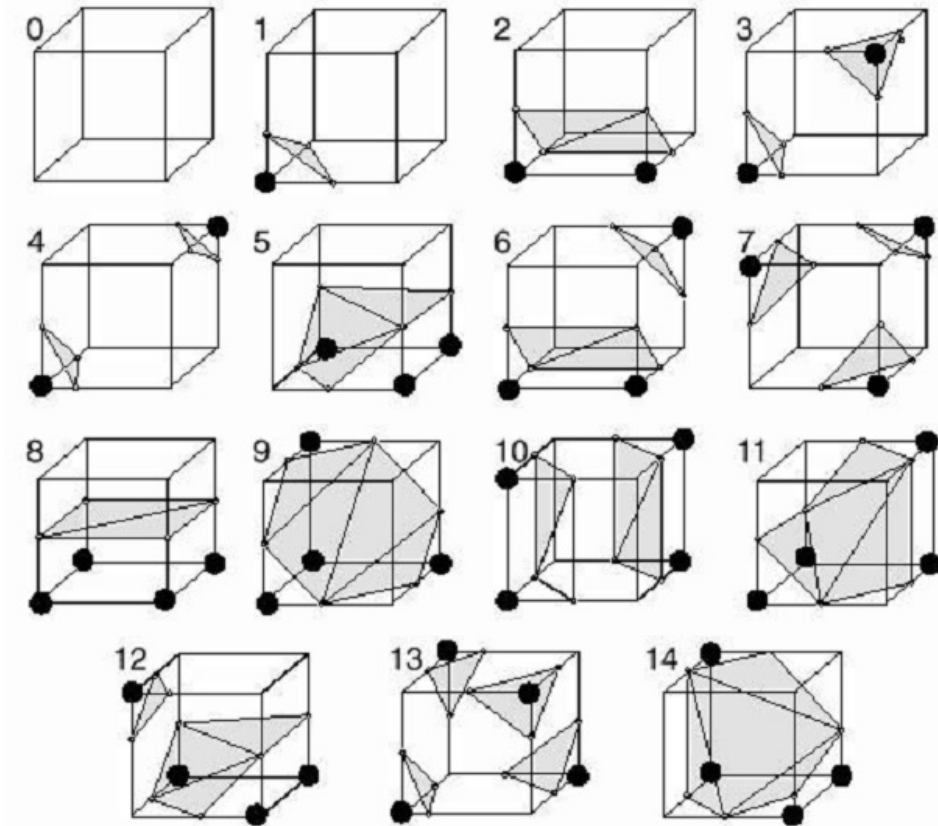


Voxels



- Example isosurfaces

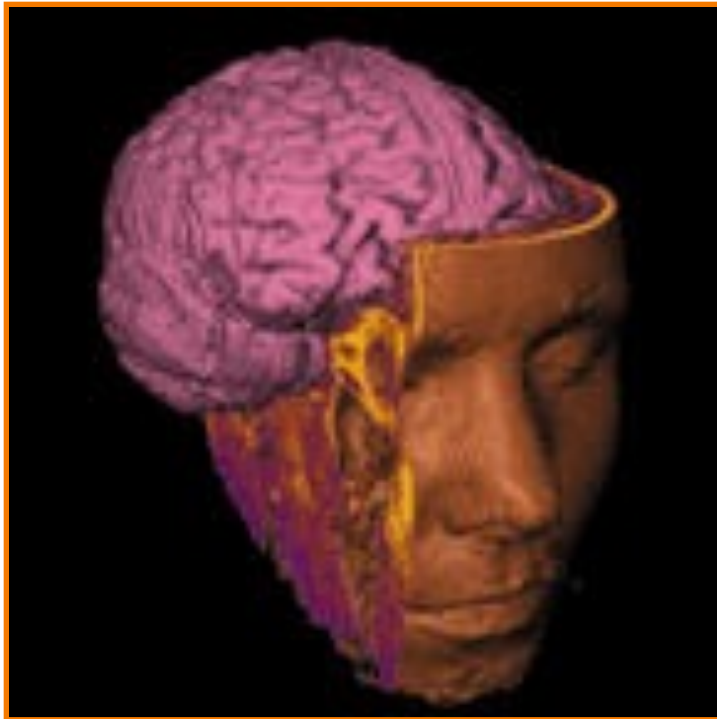

SUNY Stony Brook

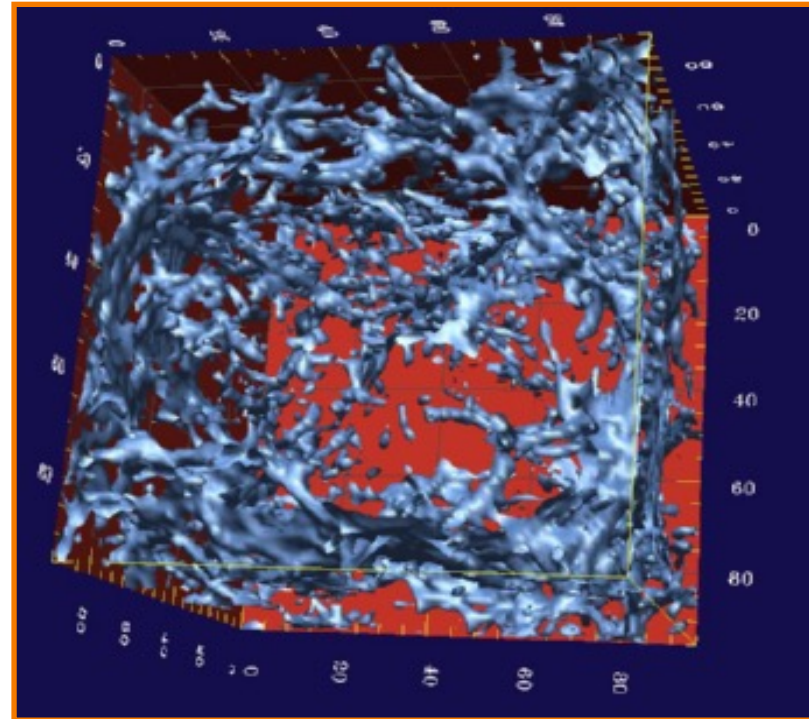


Princeton University

Example: Marching Cubes



Voxels: $512 \times 512 \times 184 = 48,234,496$
Vertices: 66,718
Triangles: 398,382
Threshold 943
FPS: 122.179

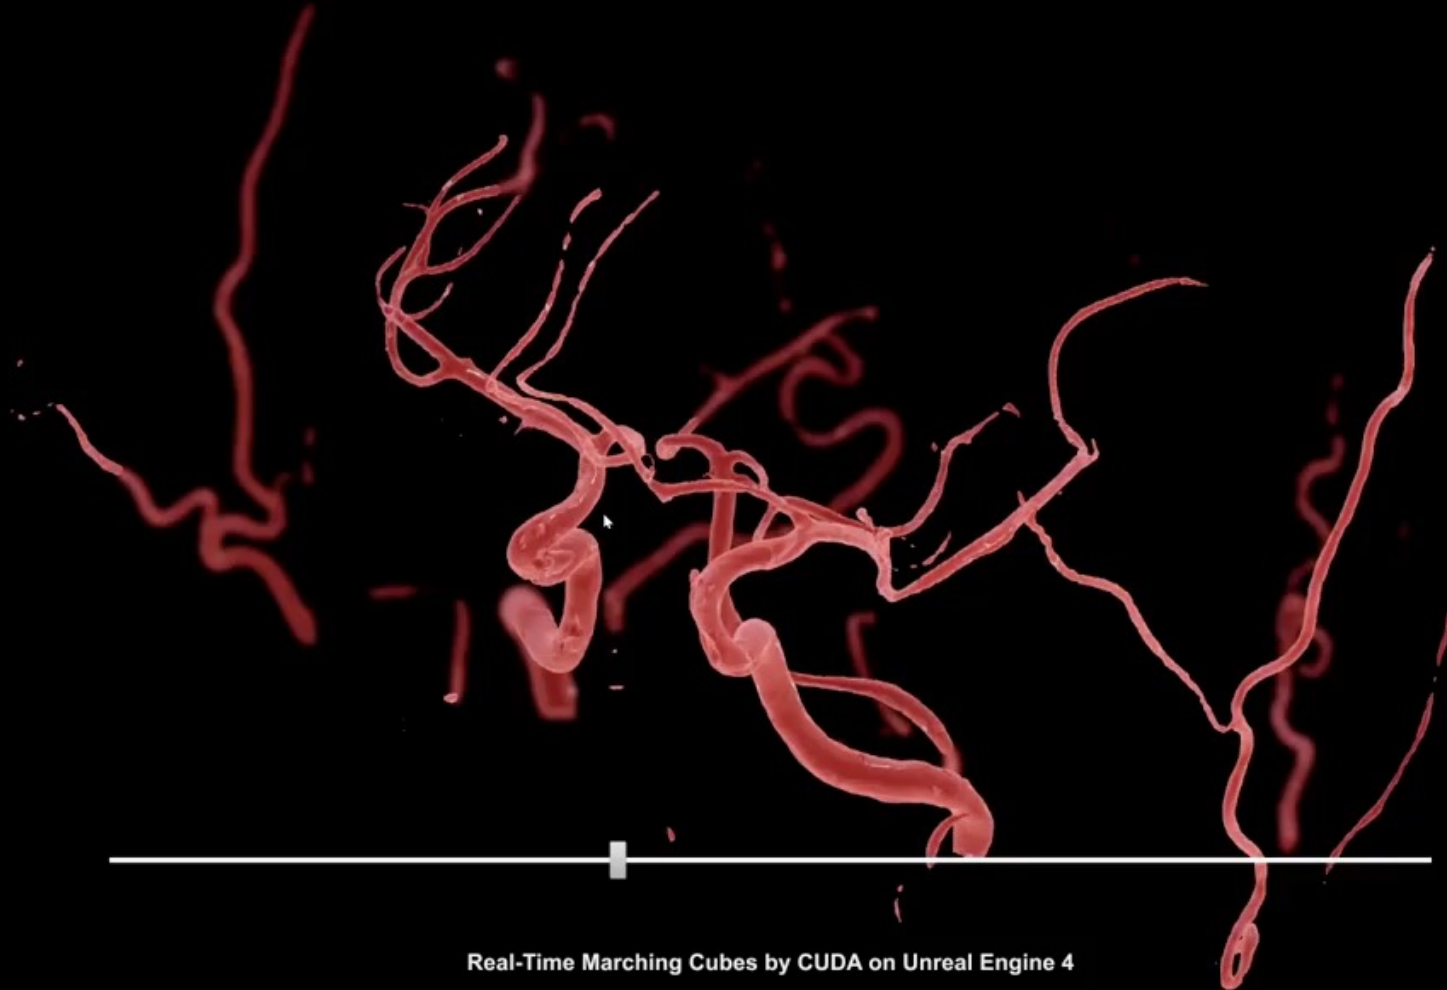


Windows 10
Intel Core i7-7700K 4.20GHz
32.0G Memory
NVIDIA GeForce GTX 1080 Ti

Real-Time Marching Cubes by CUDA on Unreal Engine 4

Voxel Storage



- $O(n^3)$ storage for $n \times n \times n$ grid
 - 1 billion voxels for $1000 \times 1000 \times 1000$

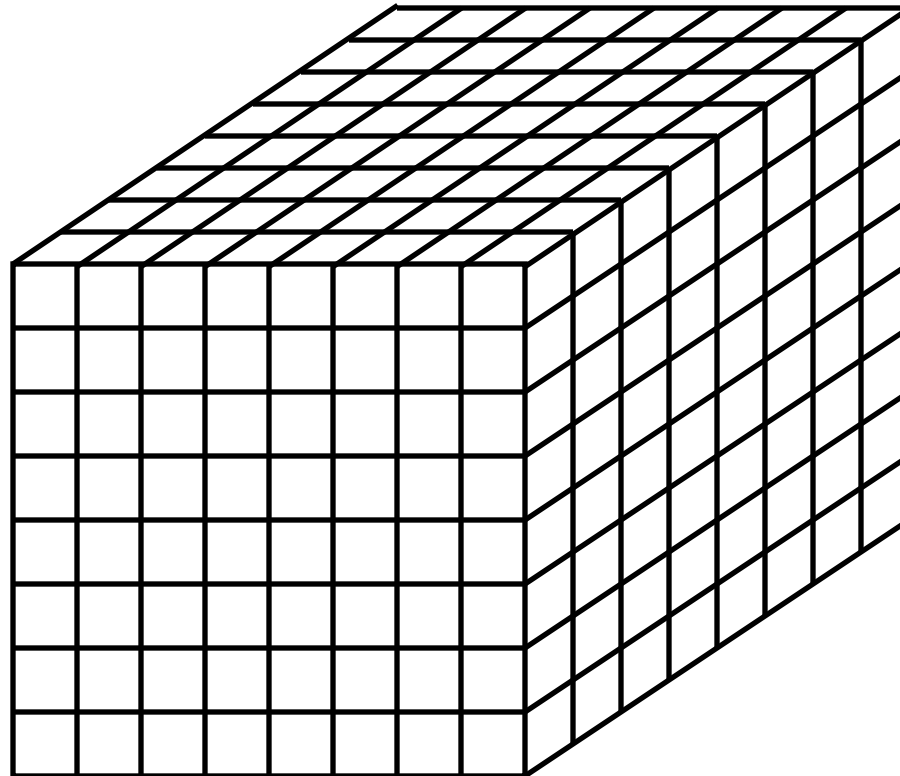

Implicit Surface Representations




- How do we define implicit function?
 - Algebraics
 - Voxels
 - Basis functions
 - Neural Networks

Basis functions



- Implicit function is sum of basis functions
 - Example:

$$f(P) = a_0 e^{-b_0 d(P, P_0)^2} + a_1 e^{-b_1 d(P, P_1)^2} + \dots - \tau$$

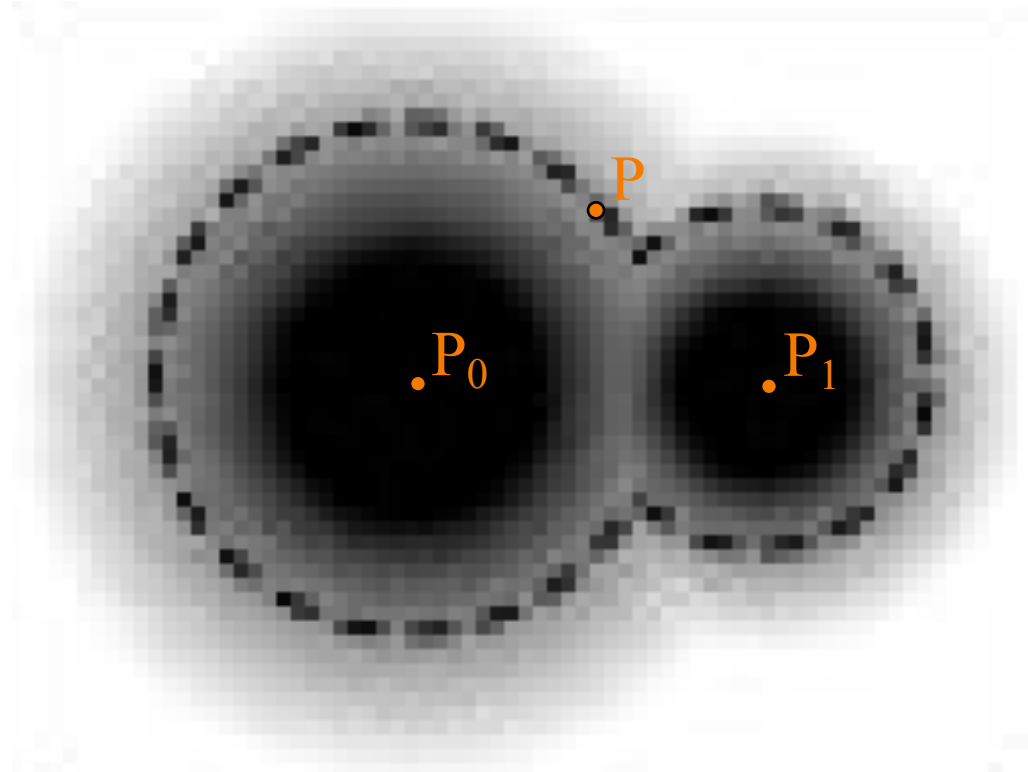


Blobby Models



- Implicit function is sum of Gaussians


$$f(P) = a_0 e^{-b_0 d(P, P_0)^2} + a_1 e^{-b_1 d(P, P_1)^2} + \dots - \tau$$

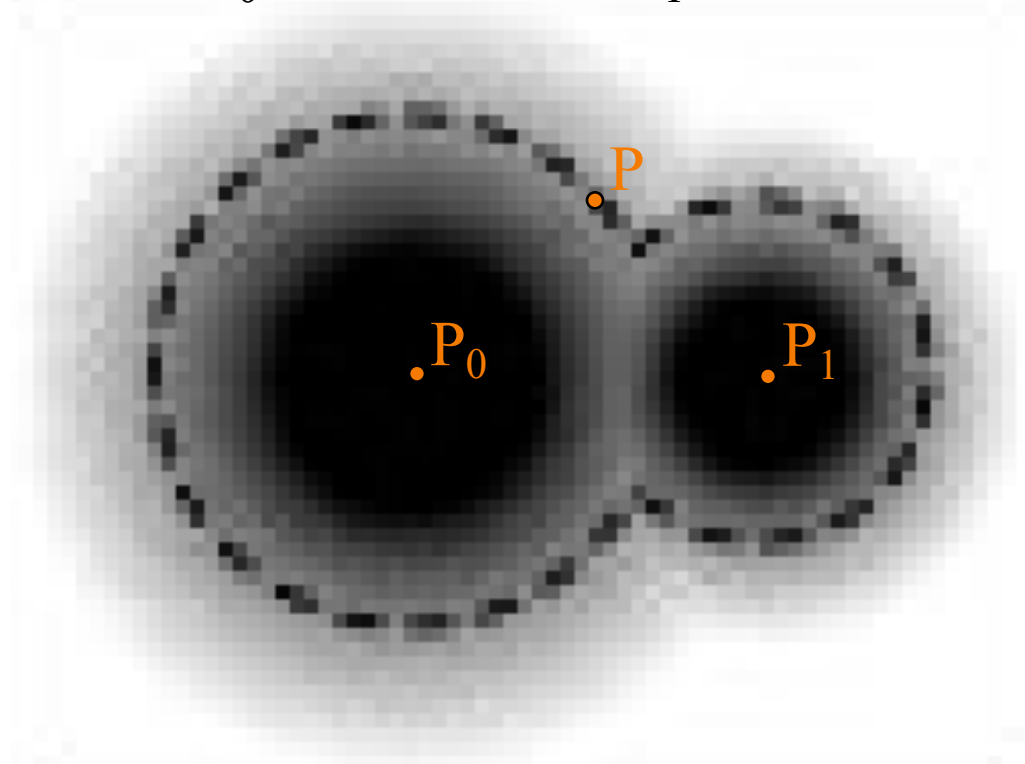

Blobby Models




- Sum of two blobs

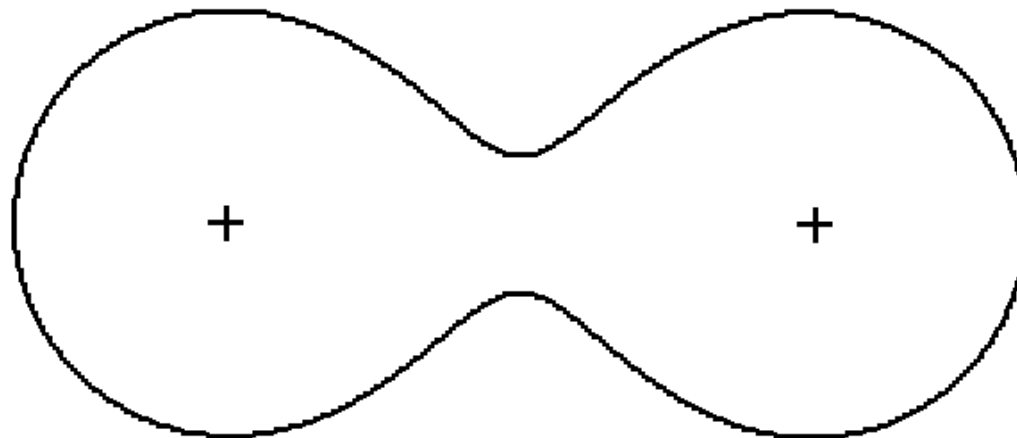

Blobby Models




- Sum of four blobs

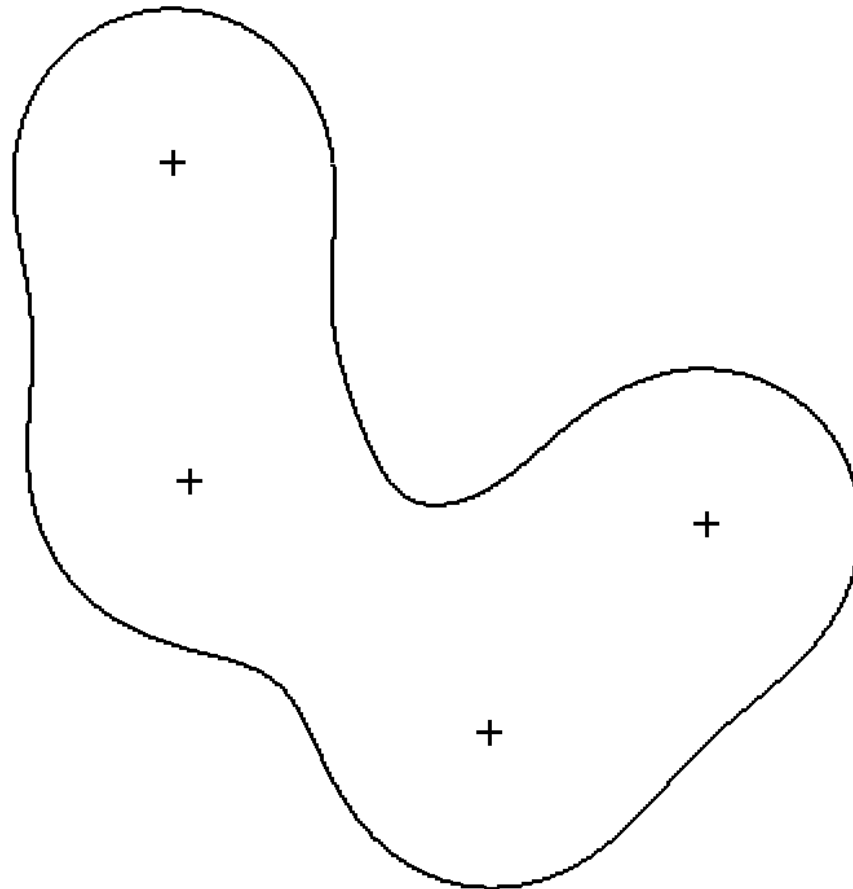


Turk

Blobby Model of Head

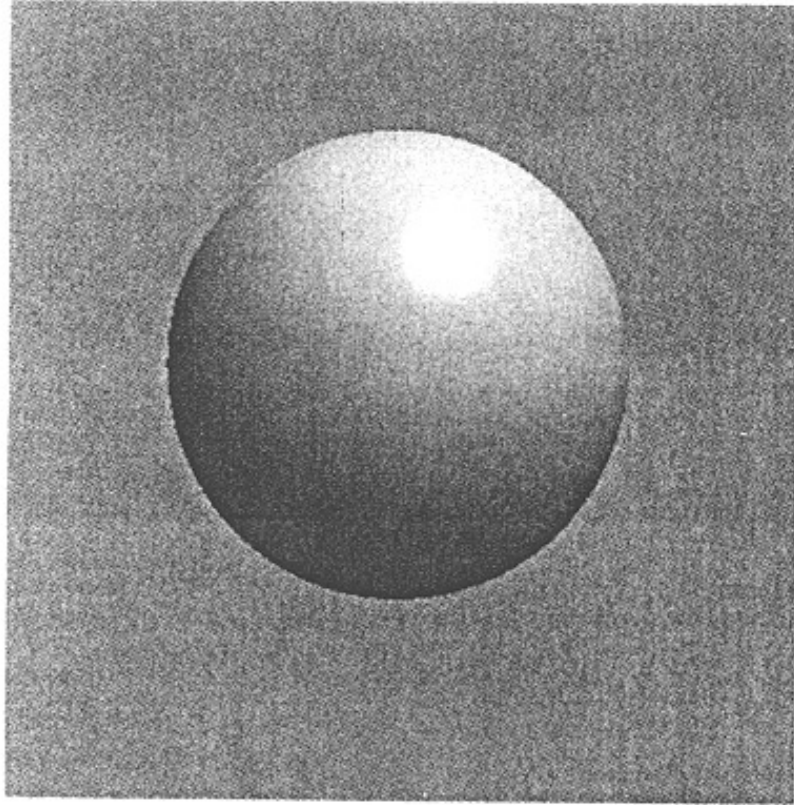


(a) $N = 1$

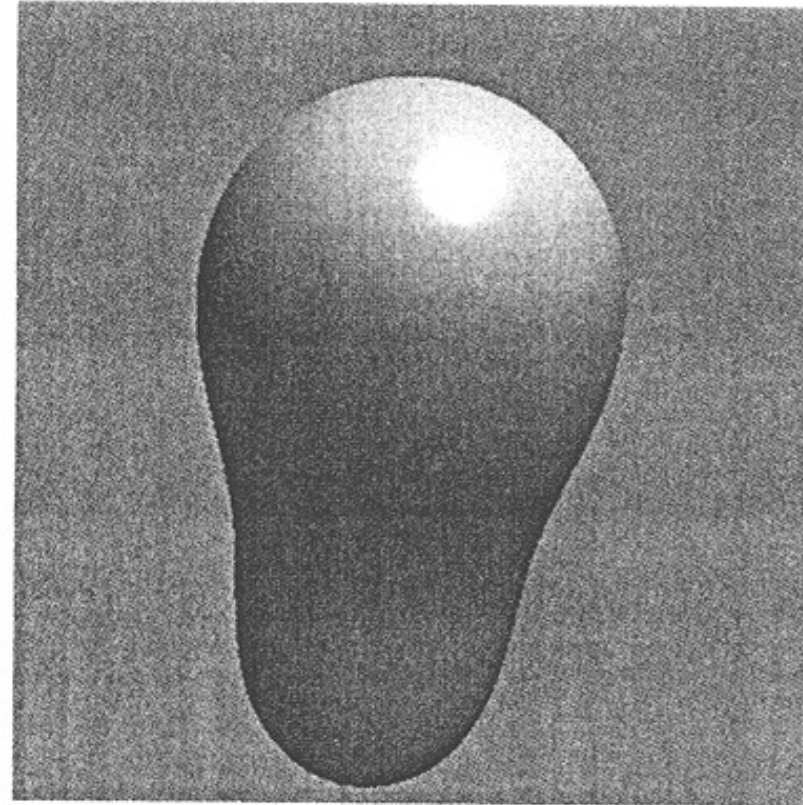


(b) $N = 2$

Blobby Model of Head

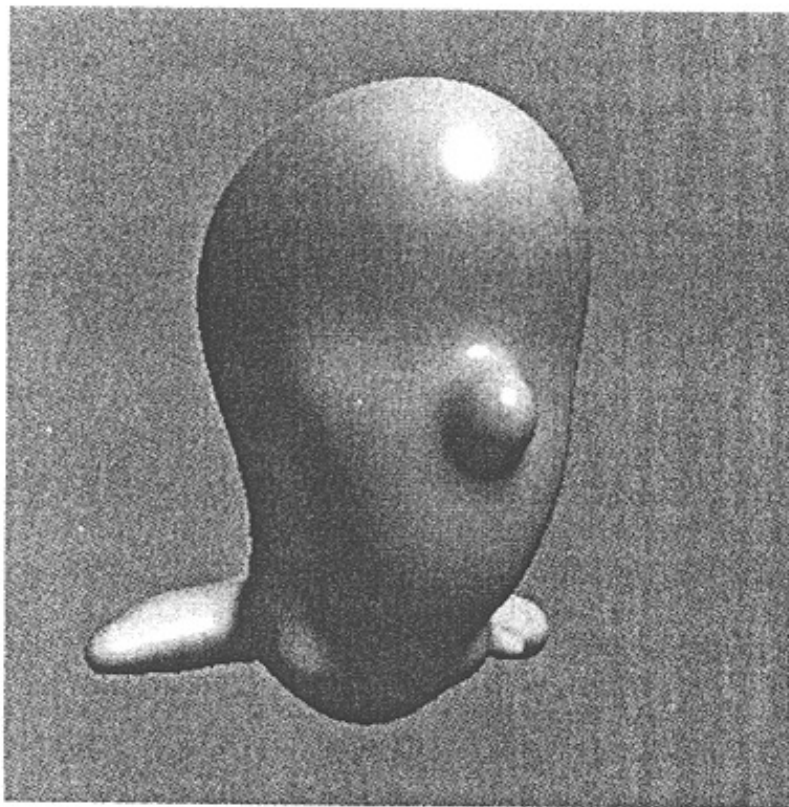


(c) $N = 20$

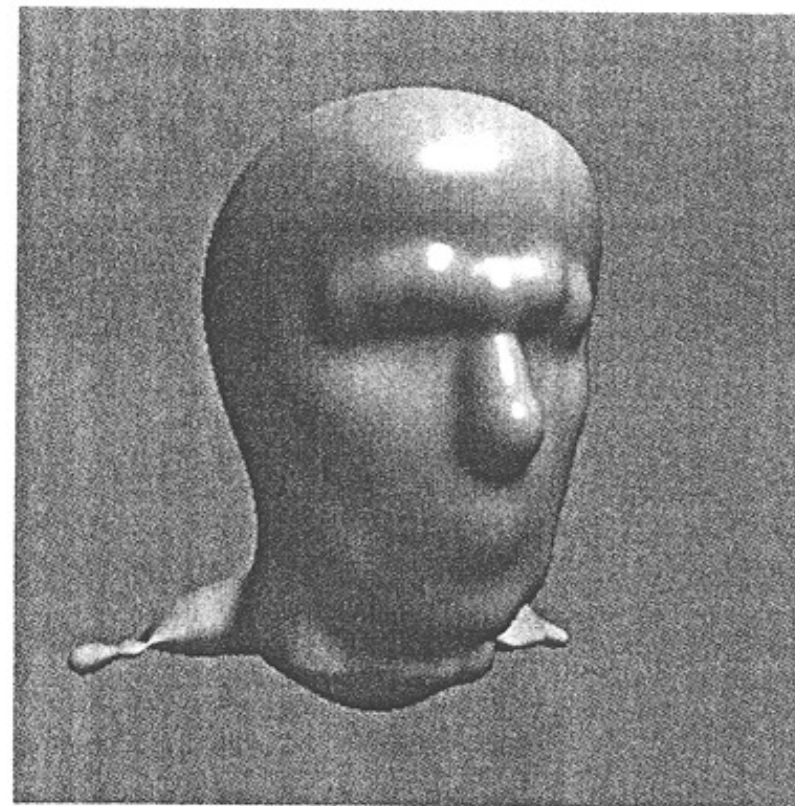


(d) $N = 60$

Blobby Model of Face

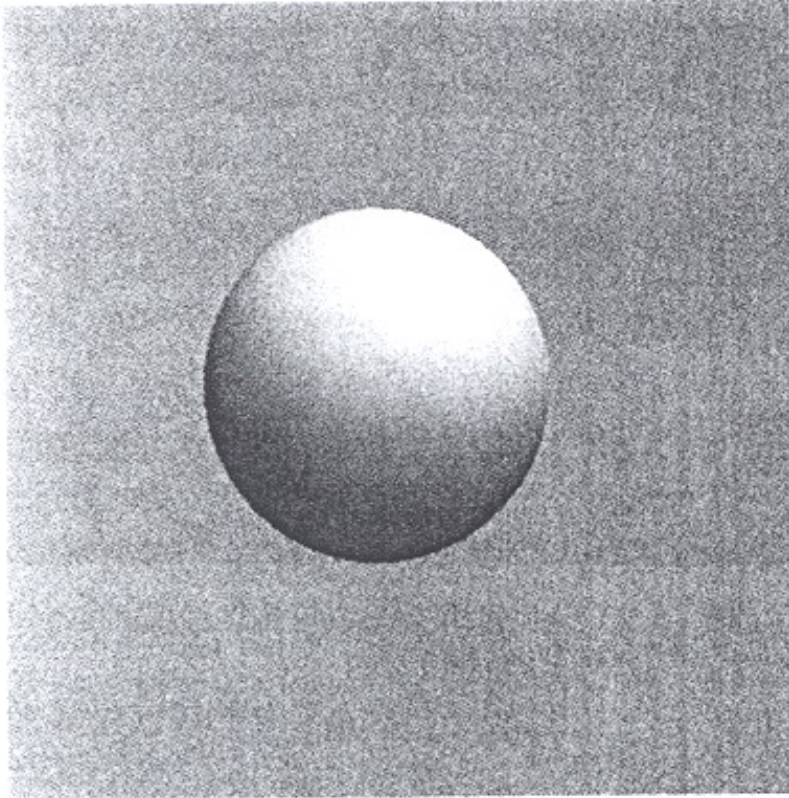


(a) $N = 1$

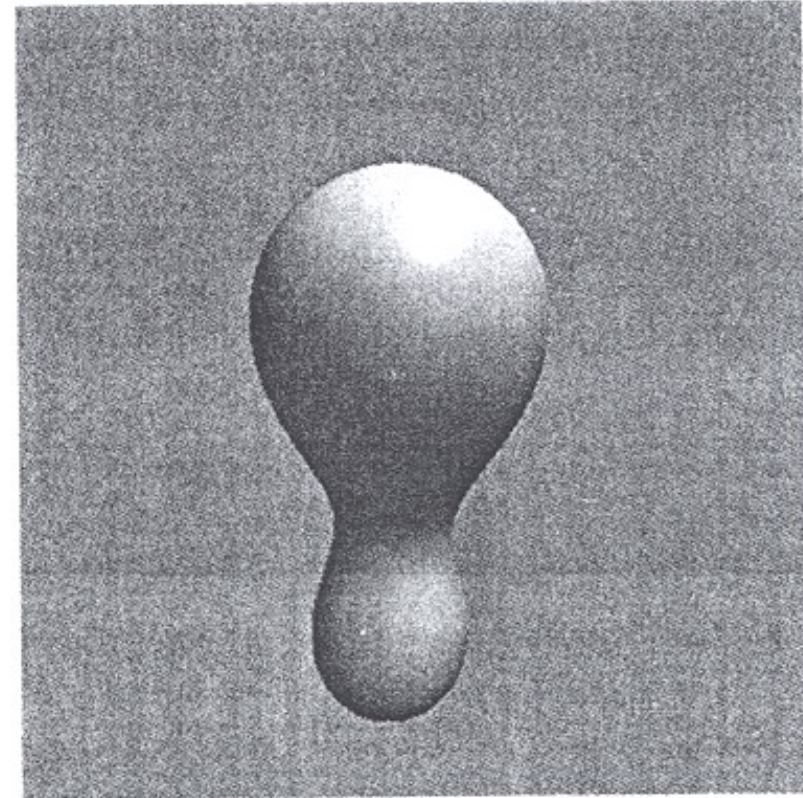


(b) $N = 2$

Blobby Model of Face

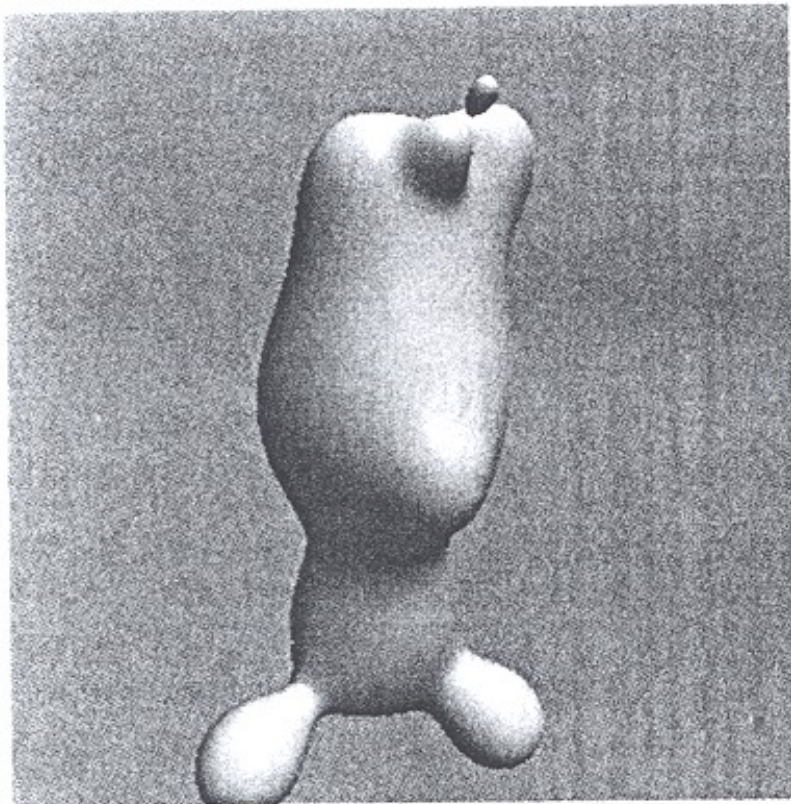


(c) $N = 10$

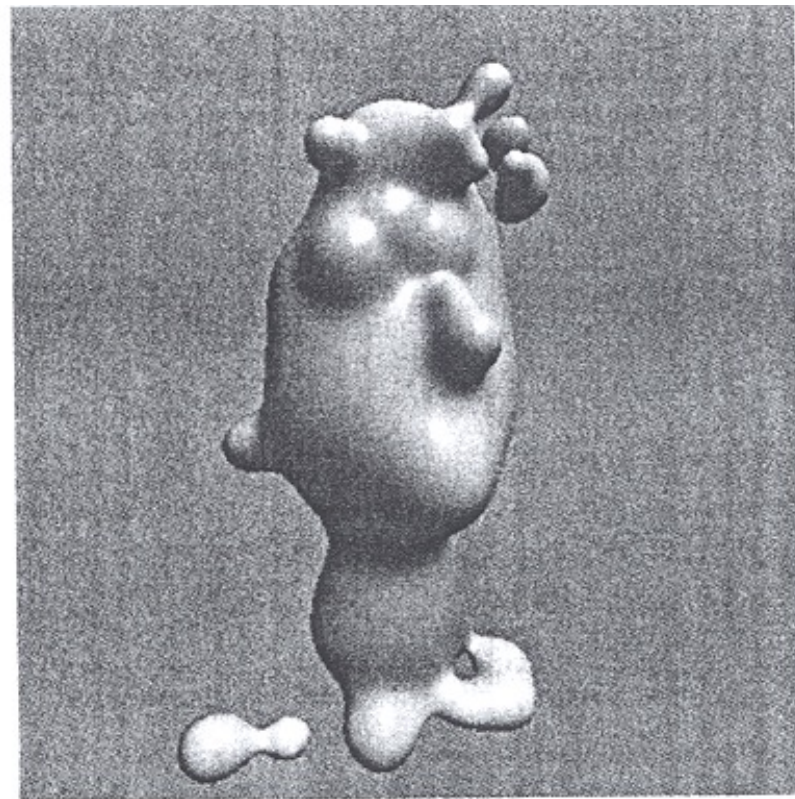


(d) $N = 35$

Blobby Model of Face

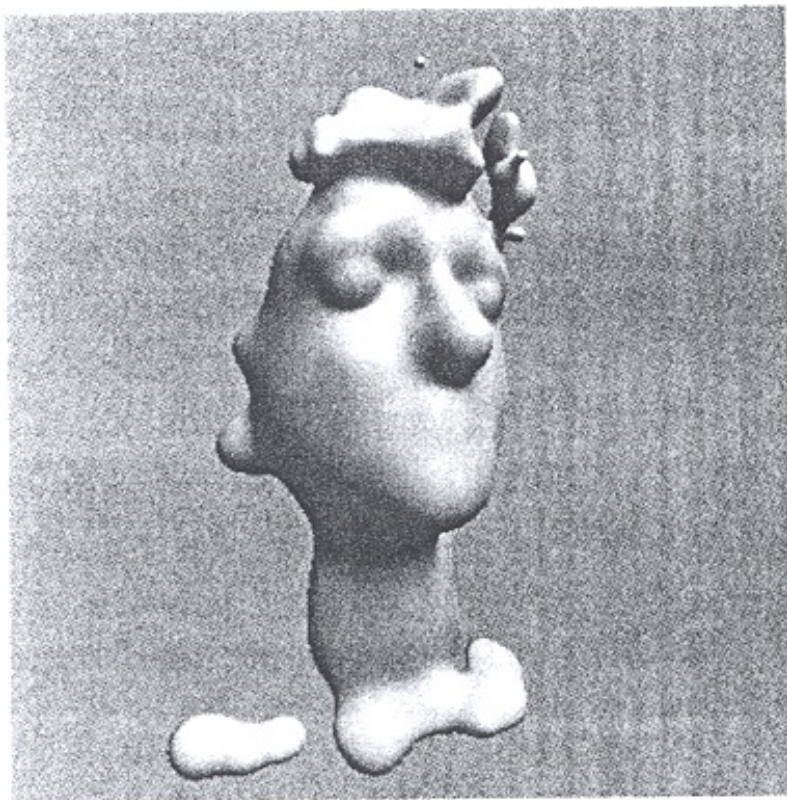

(e) $N = 70$

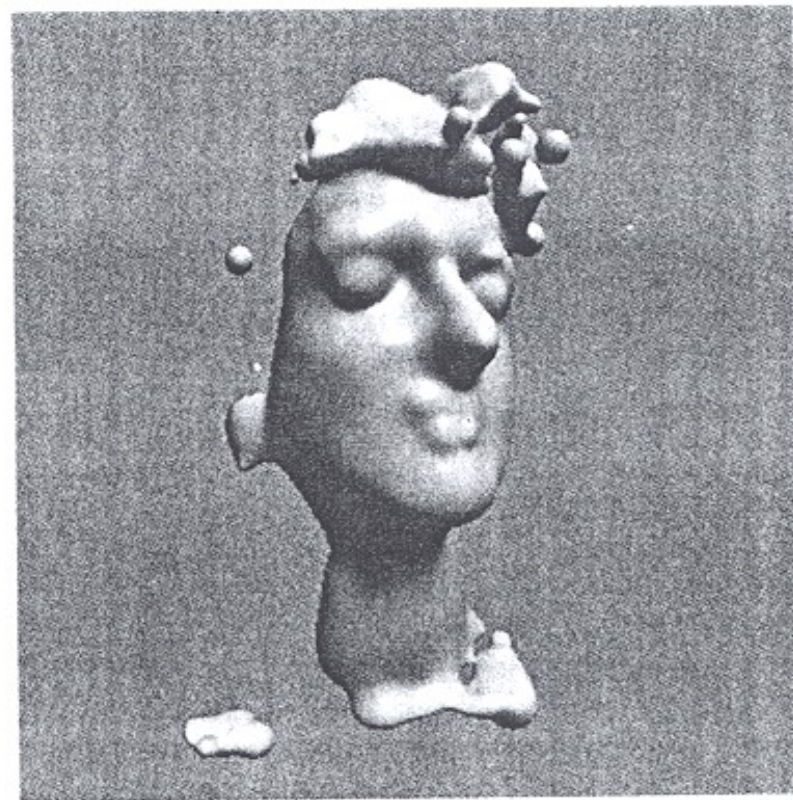

(f) $N = 243$


Example: Modeling

[olivelarouille on Youtube]



fps:2227.640869
Surface editor mode
New model*


www.fpsa.com

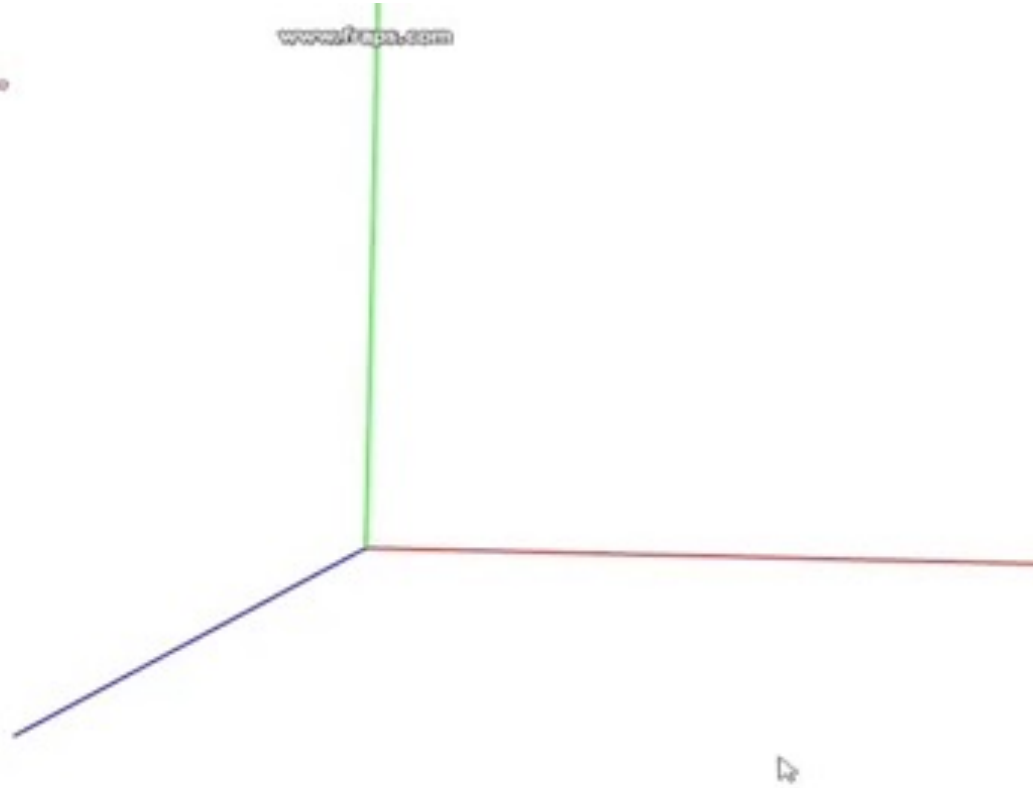


Reconstruction from Pointsets



Input

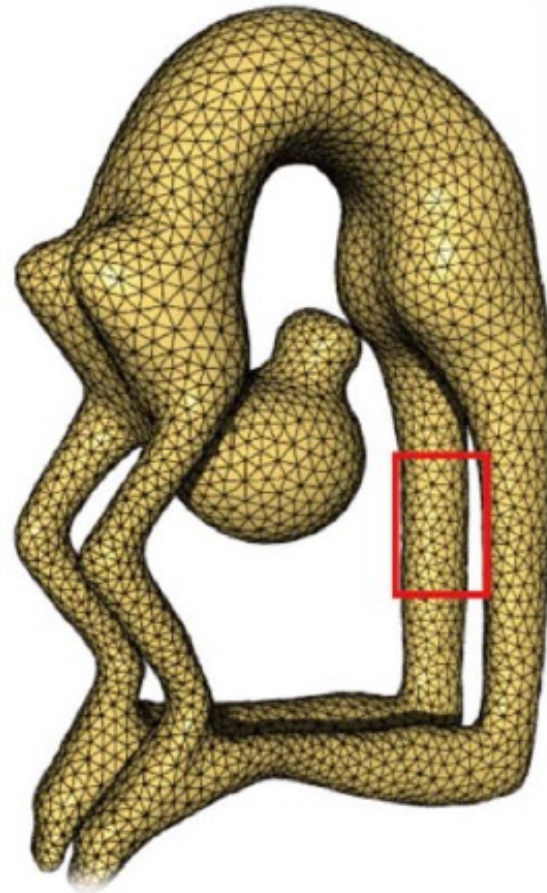

Implicit

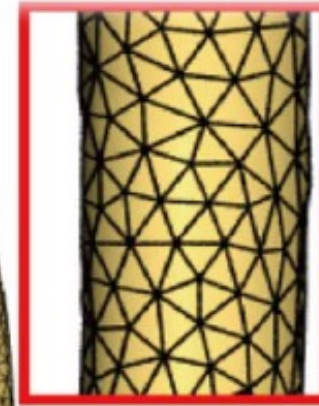


Reconstruction from Point Sets




- Implicit function is sum of basis functions

$$\text{dist}(\mathbf{x}) = \sum_i w_i \varphi_i(\mathbf{x}) = \sum_i w_i \varphi(\|\mathbf{x} - \mathbf{c}_i\|)$$

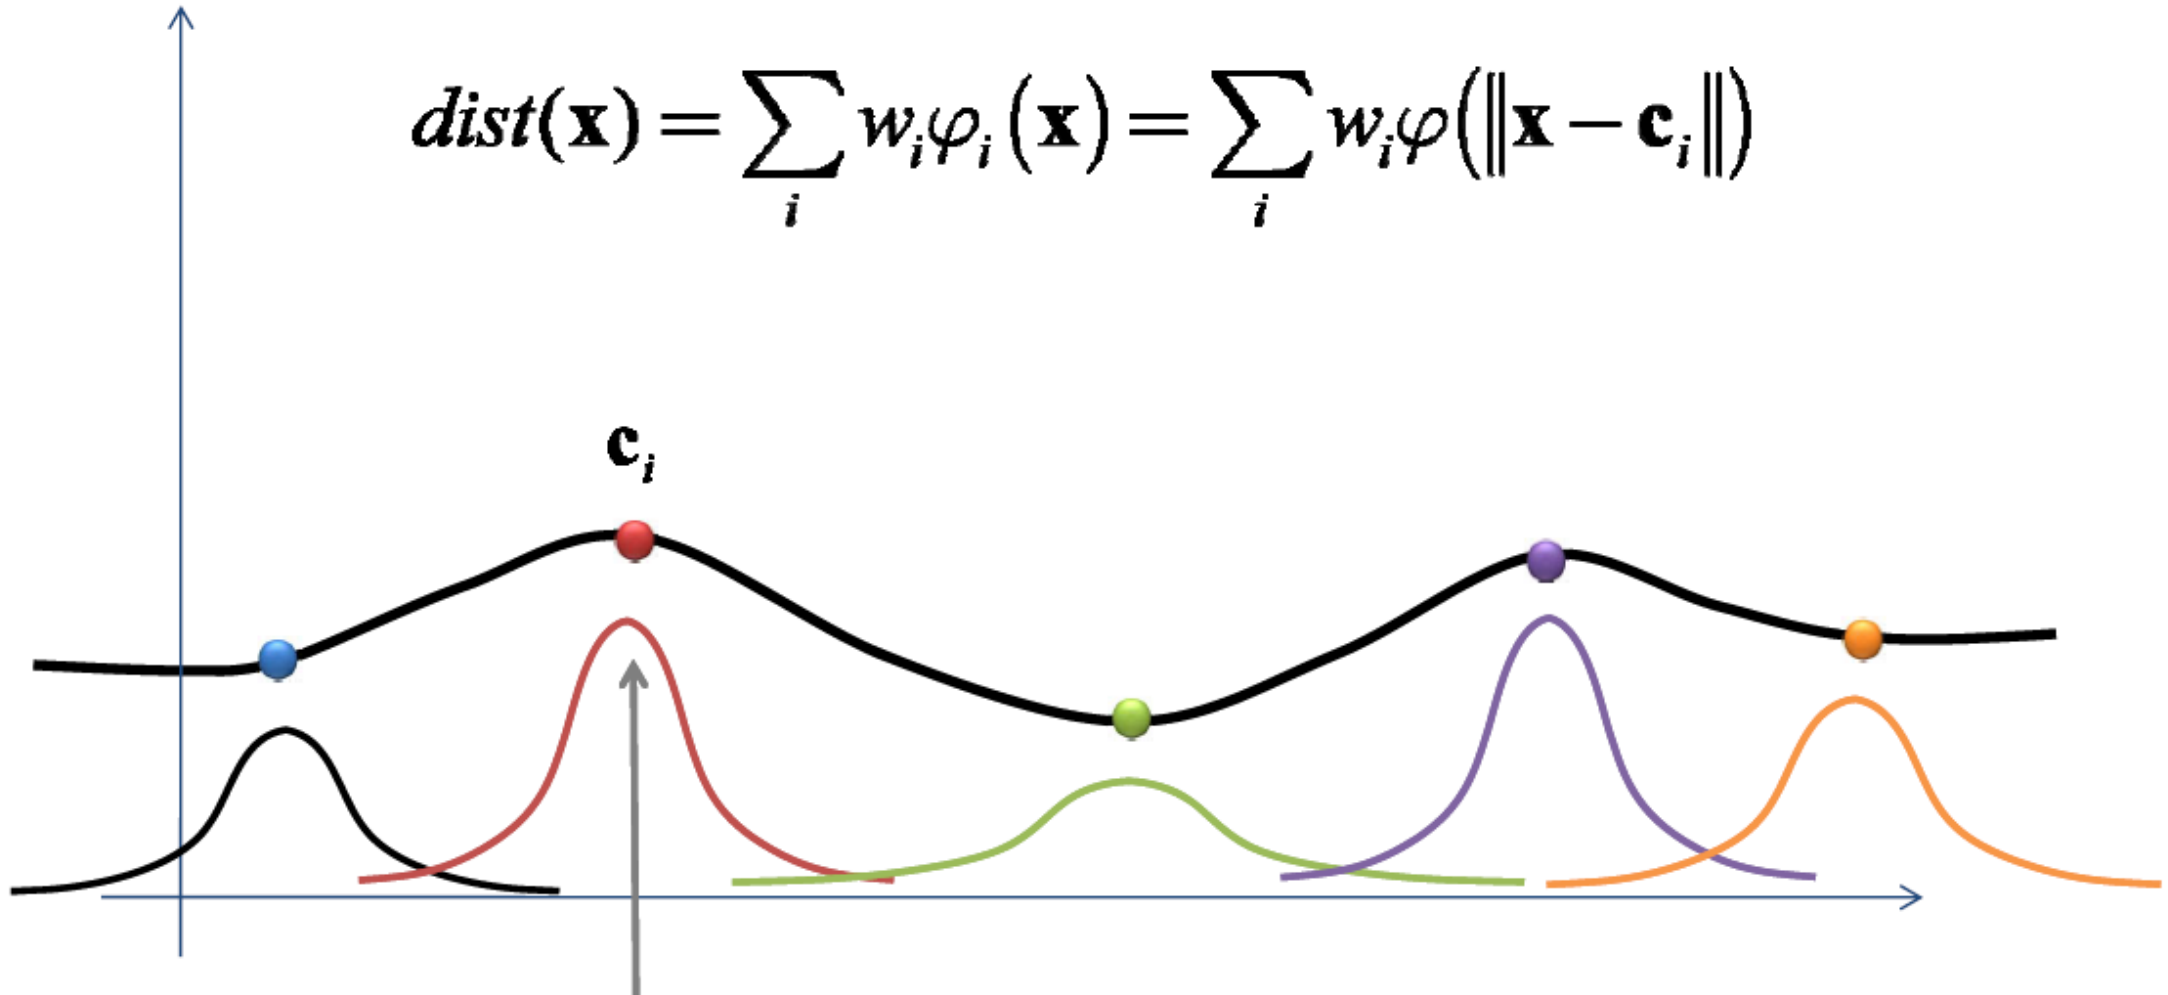

Reconstruction from Point Sets

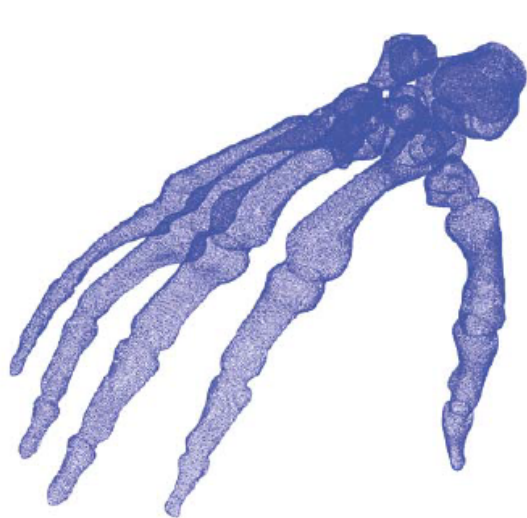


Implicit Surface Representations



- How do we define implicit function?
 - Algebraics
 - Voxels
 - Basis functions
 - Neural Networks

The problem of novel view interpolation



Inputs: sparsely sampled images of scene

Outputs: *new views* of same scene



NeRF (neural radiance fields):

Neural networks as a *volume* representation, using volume rendering to do view synthesis.

$(x, y, z, \theta, \phi) \rightarrow \textit{color, opacity}$


Neural Volumetric Rendering



Neural Volumetric Rendering



What's the radiance/color arriving at this pixel?

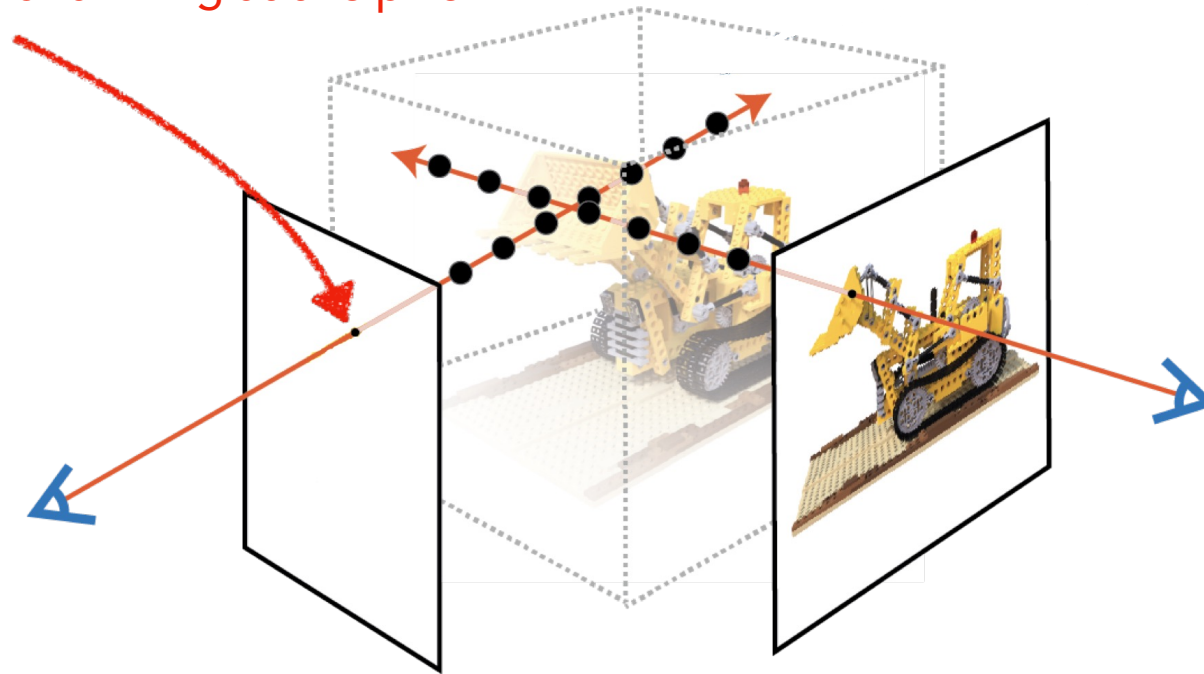

Neural Volumetric Rendering




- ▶ “Soft” volumetric functions better suited for gradient-based optimization



Neural Volumetric Rendering



- ▶ (Coordinate-based) neural network represents scene as continuous function

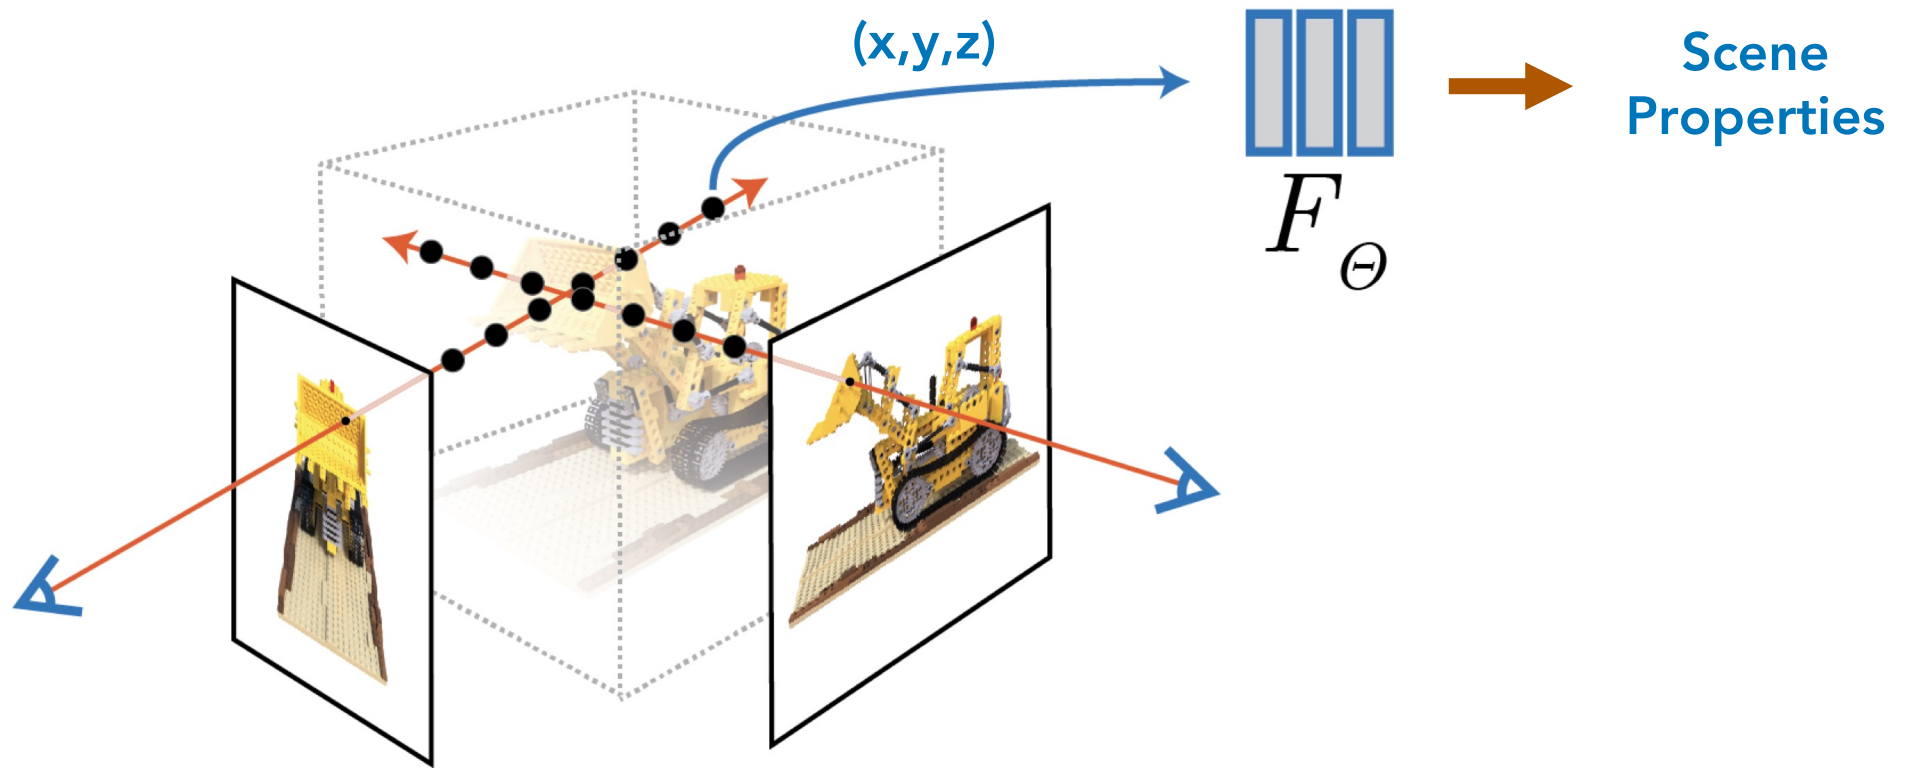



NeRF encodes detailed scene geometry with occlusion effects





NeRF in the Wild, Martin-Brualla et al.



NeRF in the Wild, M



NeRFies, Park et al.



NeRF in the Wild




NeRF




Neural Scene Flow Fields, Li et al.




NeRF in the Wild

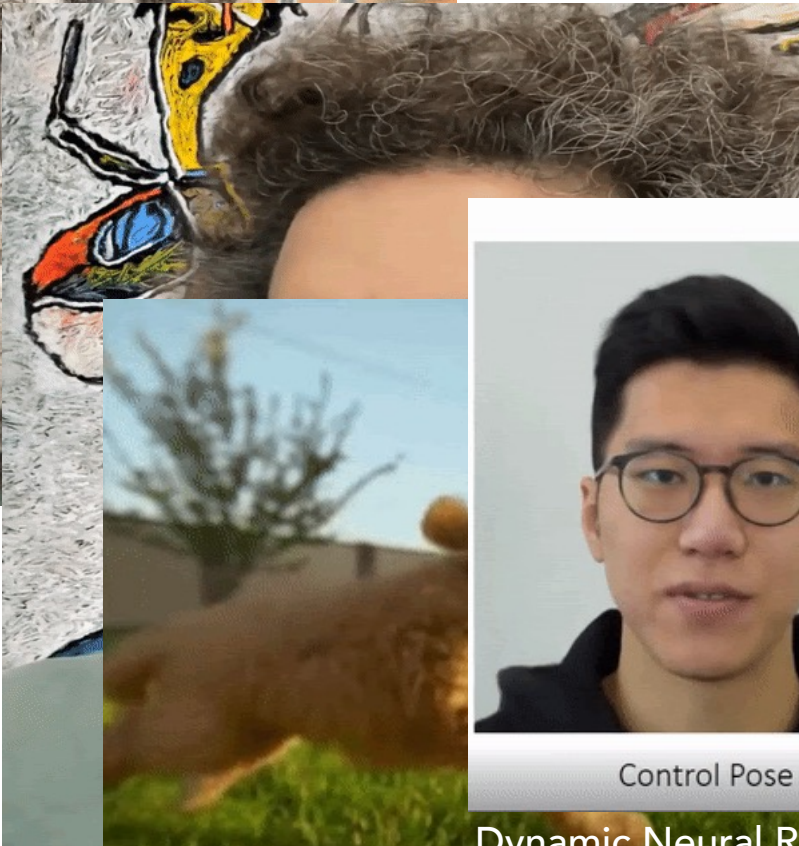

NeRF

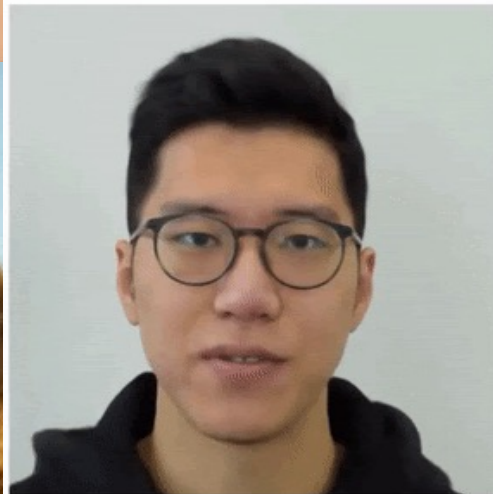

Control Pose

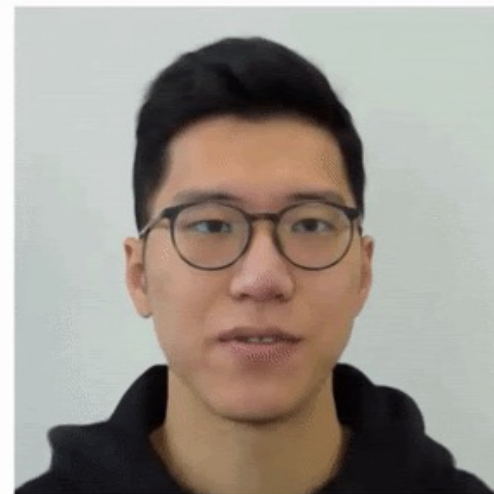

Control Expression

Dynamic Neural Radiance Fields, Gafni et al.



Neural Scene Flow Fields, Li et al.




NeRF in the Wild



NeRF

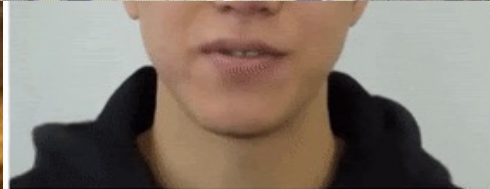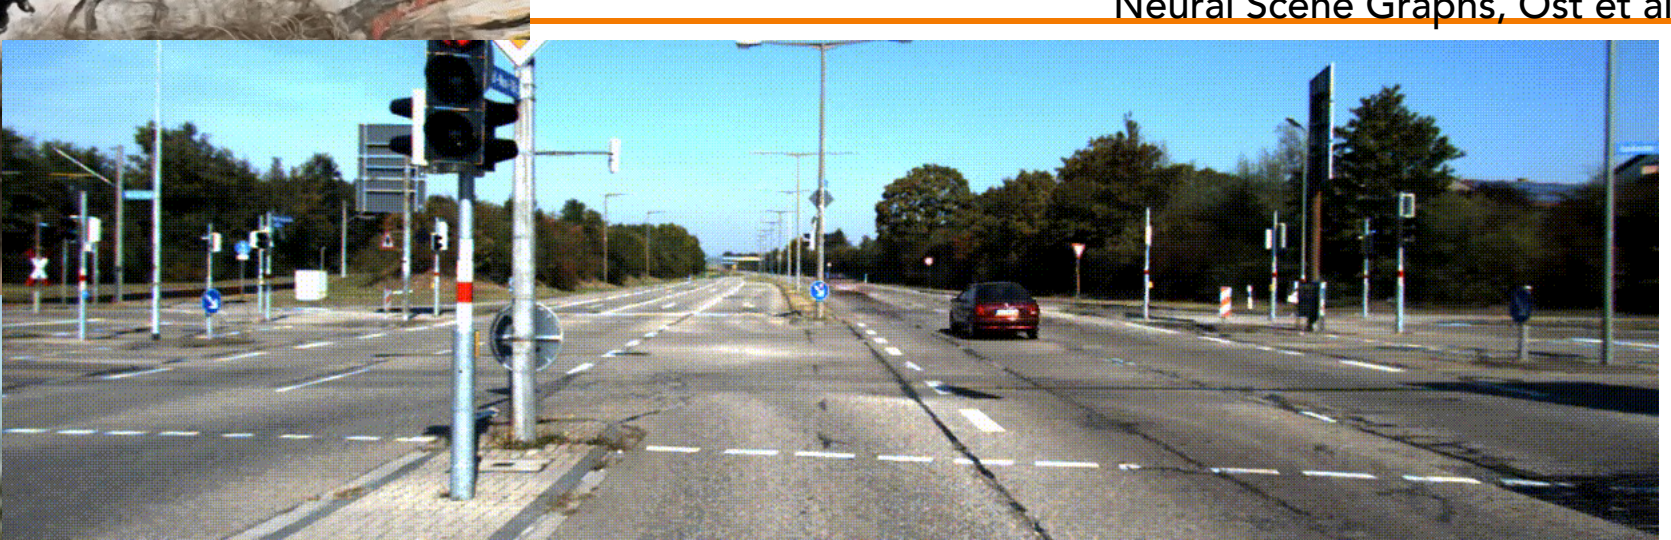

Control Pose

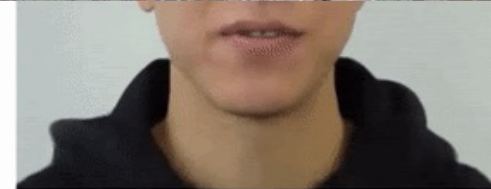

Control Expression

Dynamic Neural Radiance Fields, Gafni et al.



Neural Scene Flow Fields, Li et al.

Implicit Surface Summary



- Advantages:
 - Easy to test if point is on surface
 - Easy to compute intersections/unions/differences
 - Easy to handle topological changes
- Disadvantages:
 - Indirect specification of surface
 - Hard to describe sharp features
 - Hard to enumerate points on surface
 - » Slow rendering

Summary



Feature	Polygonal Mesh	Implicit Surface	Parametric Surface	Subdivision Surface
Accurate	No	Yes	Yes	Yes
Concise	No	Yes	Yes	Yes
Intuitive specification	No	No	Yes	No
Local support	Yes	No	Yes	Yes
Affine invariant	Yes	Yes	Yes	Yes
Arbitrary topology	Yes	No	No	Yes
Guaranteed continuity	No	Yes	Yes	Yes
Natural parameterization	No	No	Yes	No
Efficient display	Yes	No	Yes	Yes
Efficient intersections	No	Yes	No	No

3D Object Representations




- Raw data
 - Range image
 - Point cloud
- Surfaces
 - Polygonal mesh
 - Subdivision
 - Parametric
 - Implicit
- Solids
 - Voxels
 - BSP tree
 - CSG
 - Sweep
- High-level structures
 - Scene graph
 - Application specific

Solid Modeling



- Represent solid interiors of objects

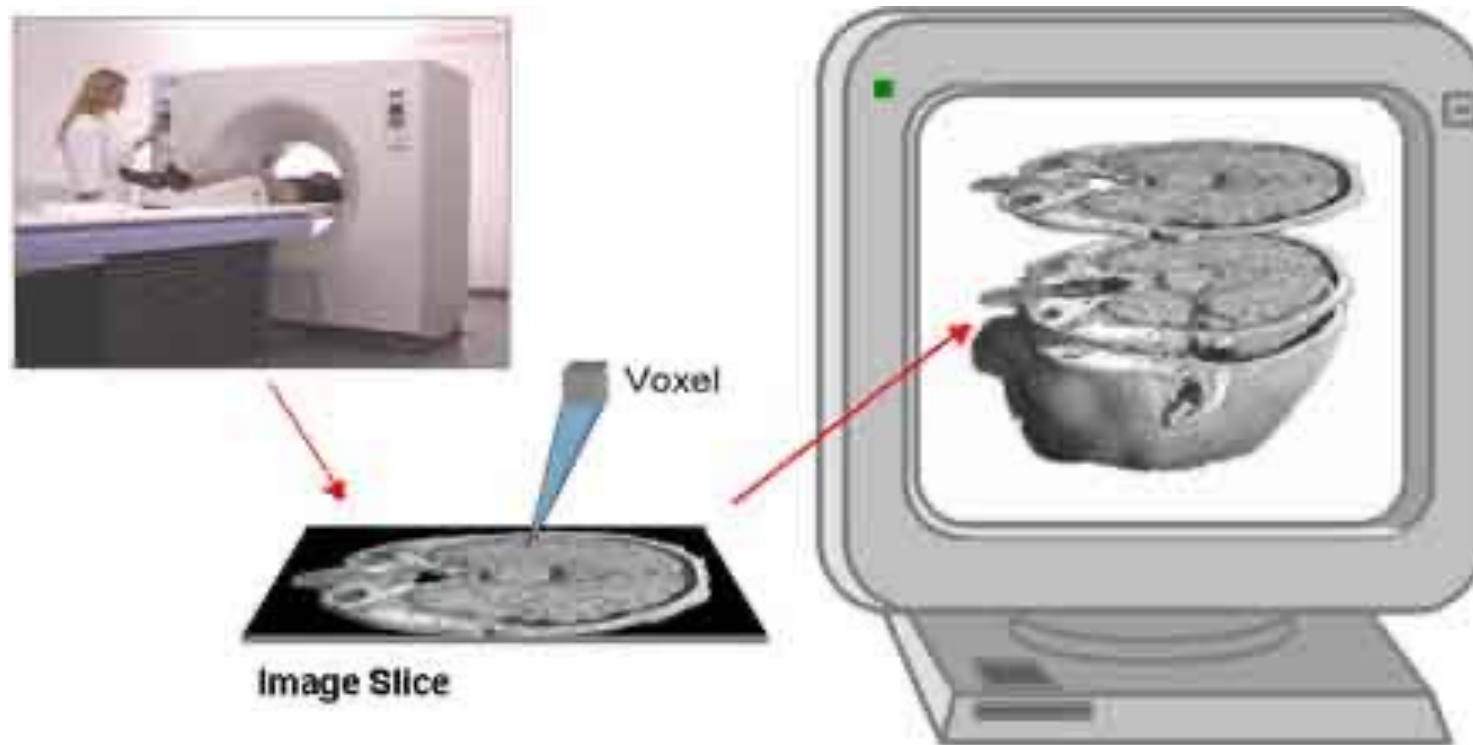


www.volumegraphics.com

Motivation 1




- Some acquisition methods generate solids

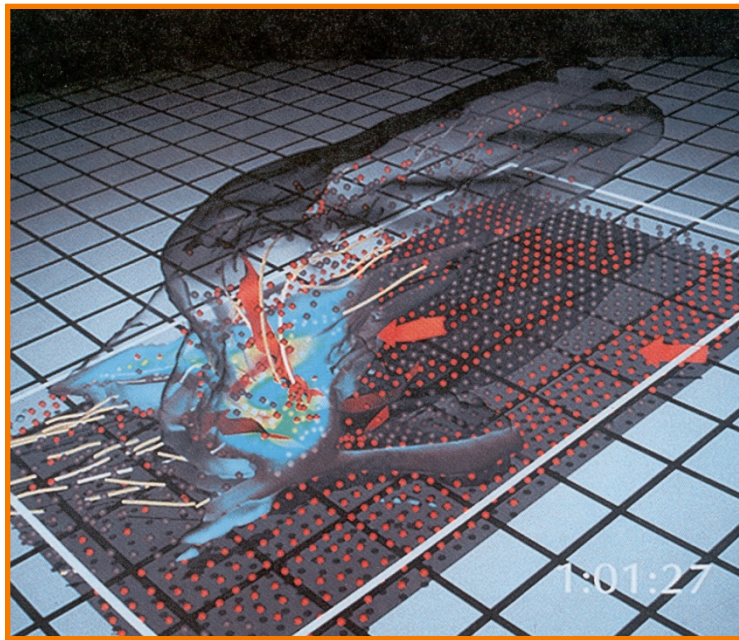

Airflow Inside a Thunderstorm

*(Bob Wilhelmson,
University of Illinois at Urbana-Champaign)*

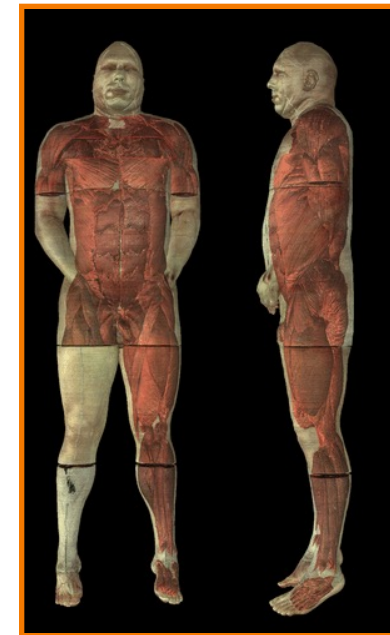

Visible Human

(National Library of Medicine)


Motivation 2



- Some applications require solids
 - Examples: medicine, CAD/CAM



SUNY Stony Brook

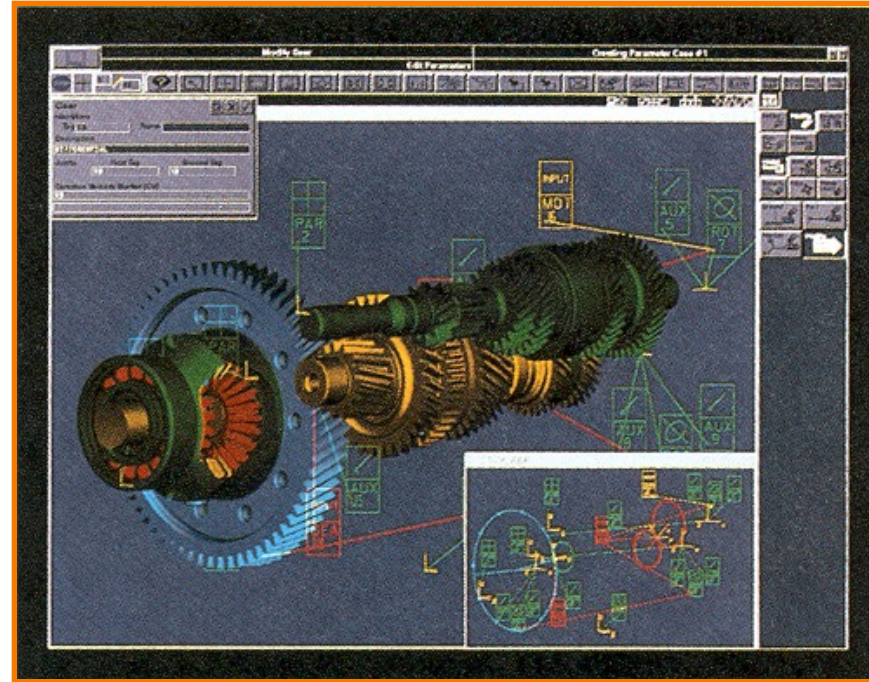


Intergraph Corporation


Motivation 3



- Some operations are easier with solids
 - Example: union, difference, intersection

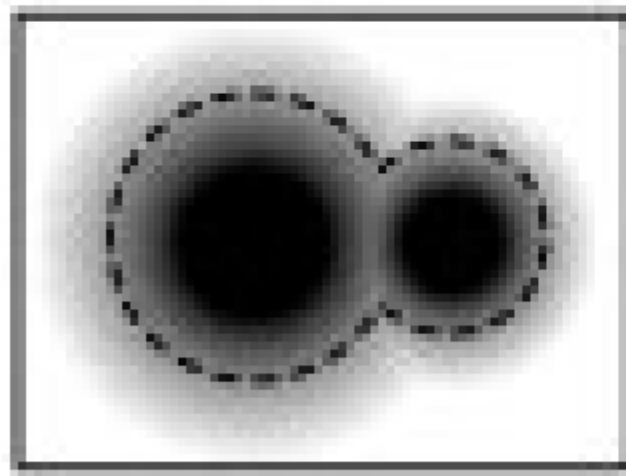

Union

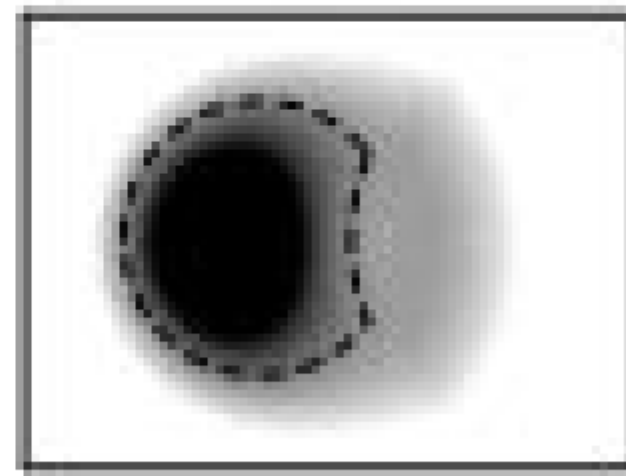

Difference

3D Object Representations




- Raw data
 - Range image
 - Point cloud
- Surfaces
 - Polygonal mesh
 - Subdivision
 - Parametric
 - Implicit
- Solids
 - Voxels
 - BSP tree
 - CSG
 - Sweep
- High-level structures
 - Scene graph
 - Application specific

Return to Voxels




- Regular array of 3D samples (like image)

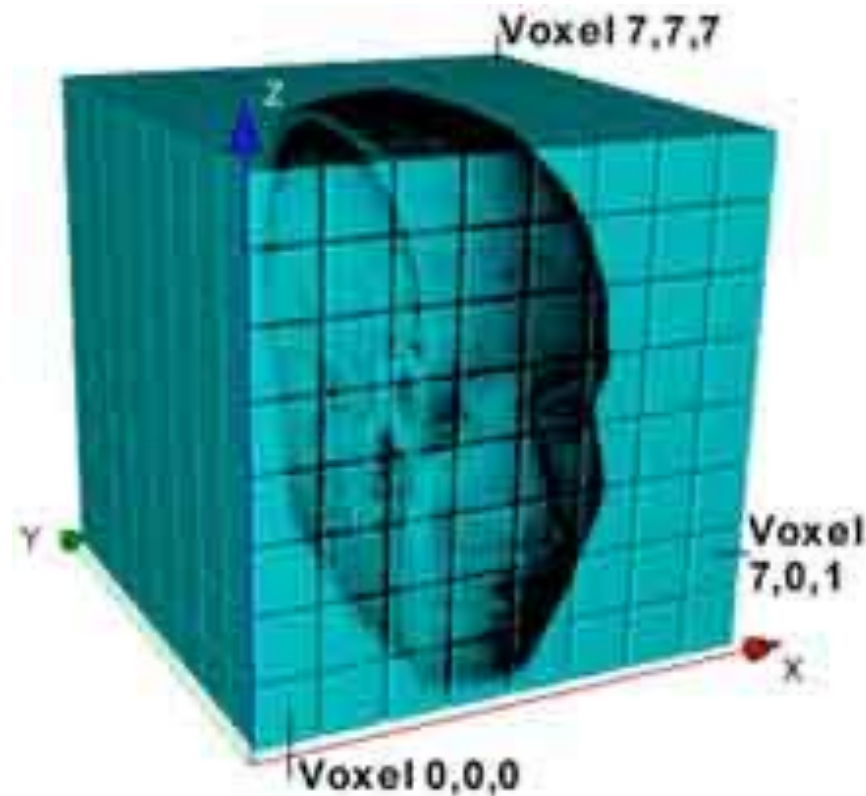


Voxels



- Store properties of solid object with each voxel
 - Occupancy
 - Color
 - Density
 - Temperature
 - etc.

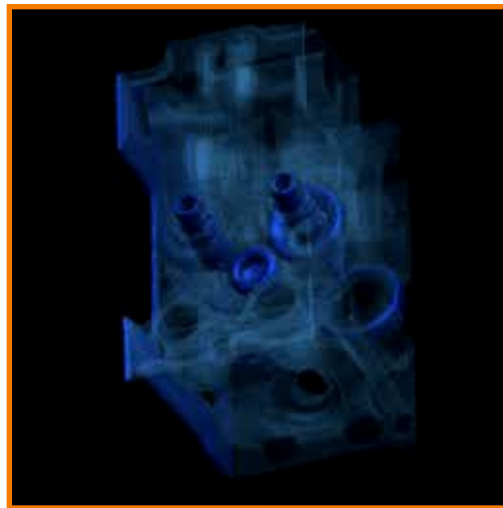

Engine Block
Stanford University

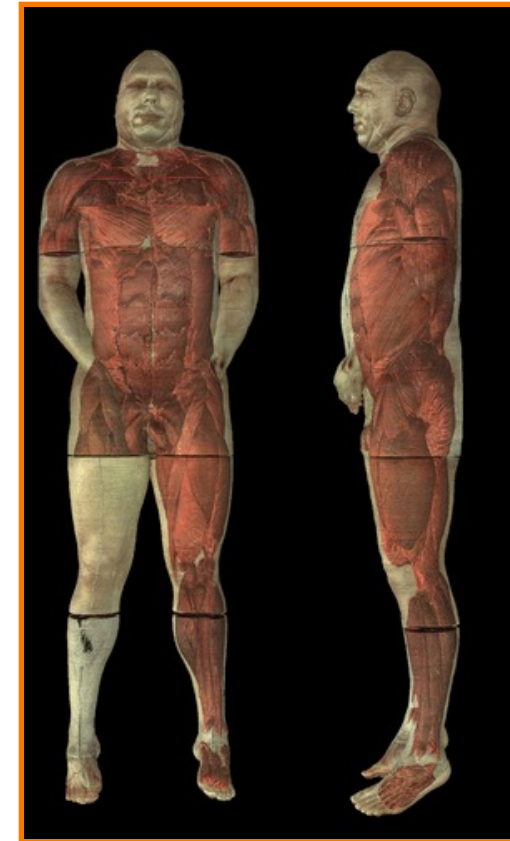


Visible Human
(National Library of Medicine)

Voxel Processing





- Signal processing (just like images)
 - Reconstruction
 - Resampling
- Typical operations
 - Blur
 - Edge detect
 - Warp
 - etc.
- Often fully analogous to image processing

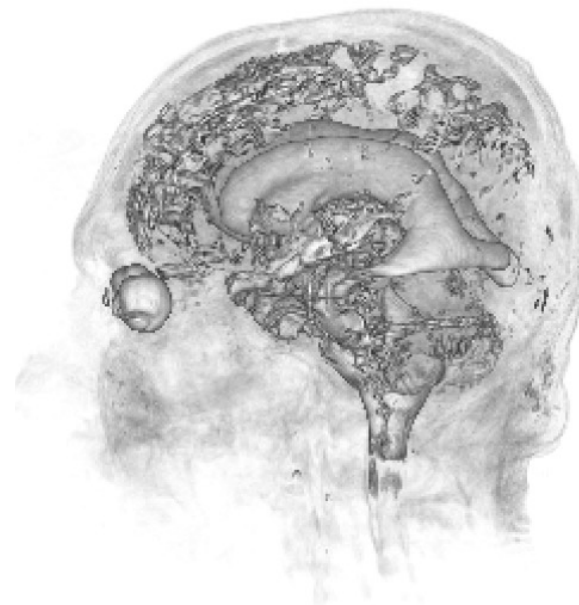

Voxel Boolean Operations




- Compare objects voxel by voxel
 - Trivial

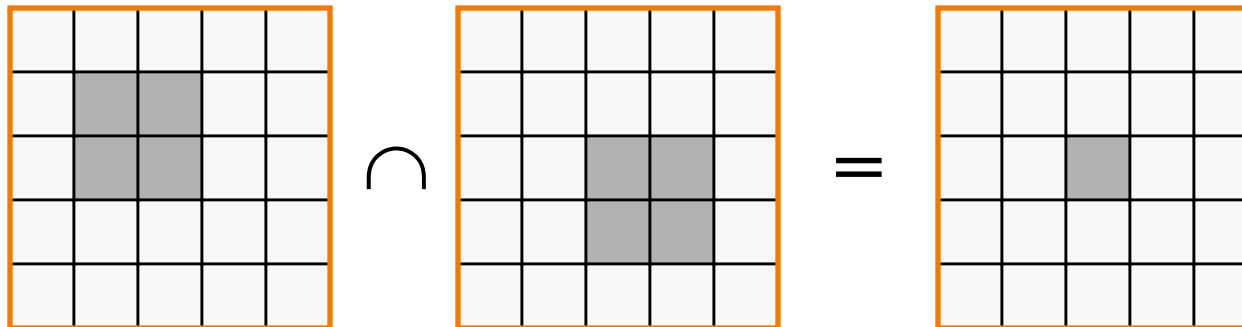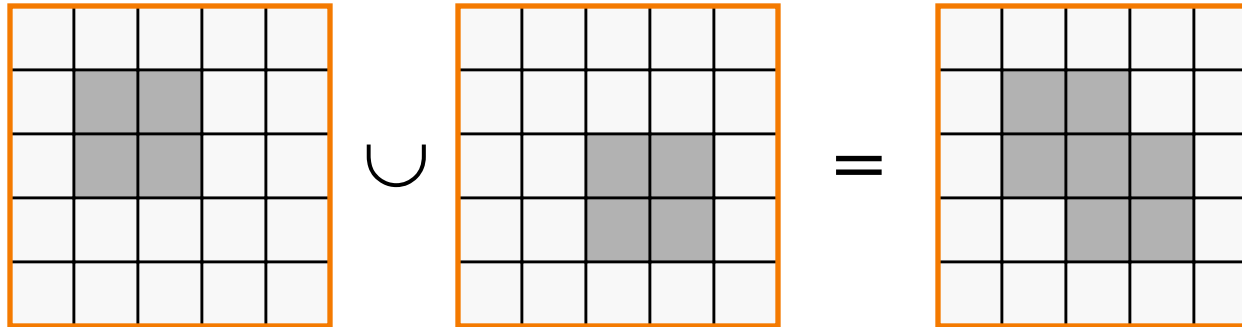

Voxel Display





- Isosurface rendering
 - Interpolate samples stored on regular grid
 - Isosurface at $f(x,y,z) = 0$ defines surface

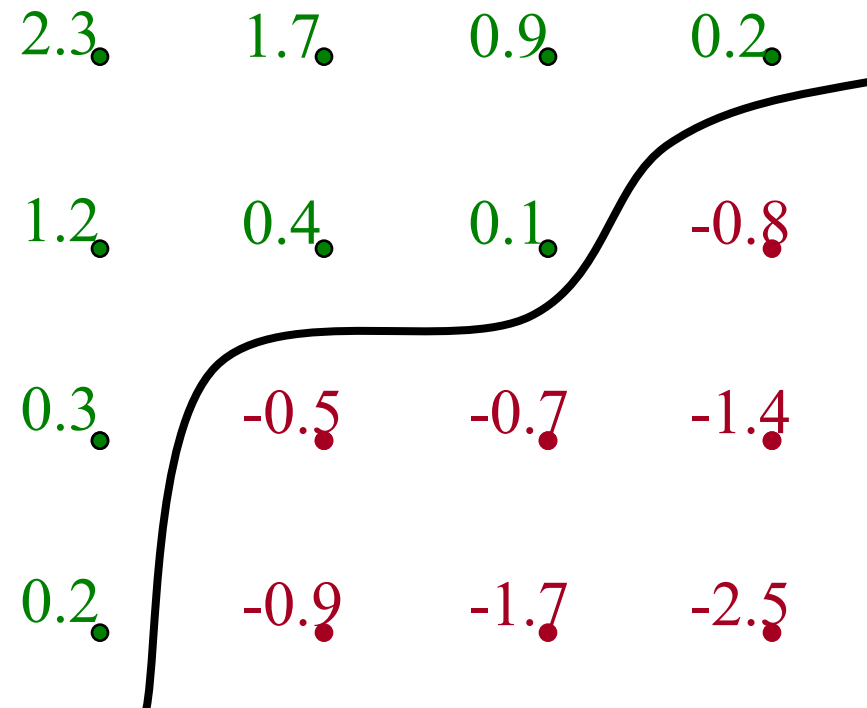

Voxel Display



- Slicing
 - Draw 2D image resulting from intersecting voxels with a plane

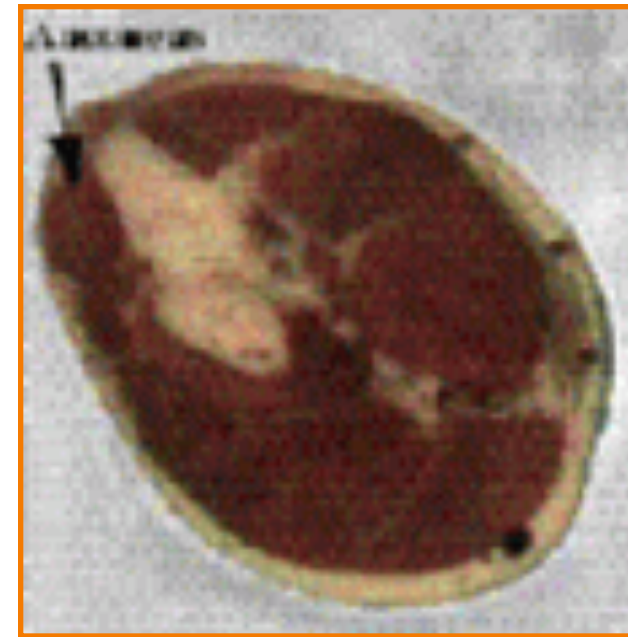
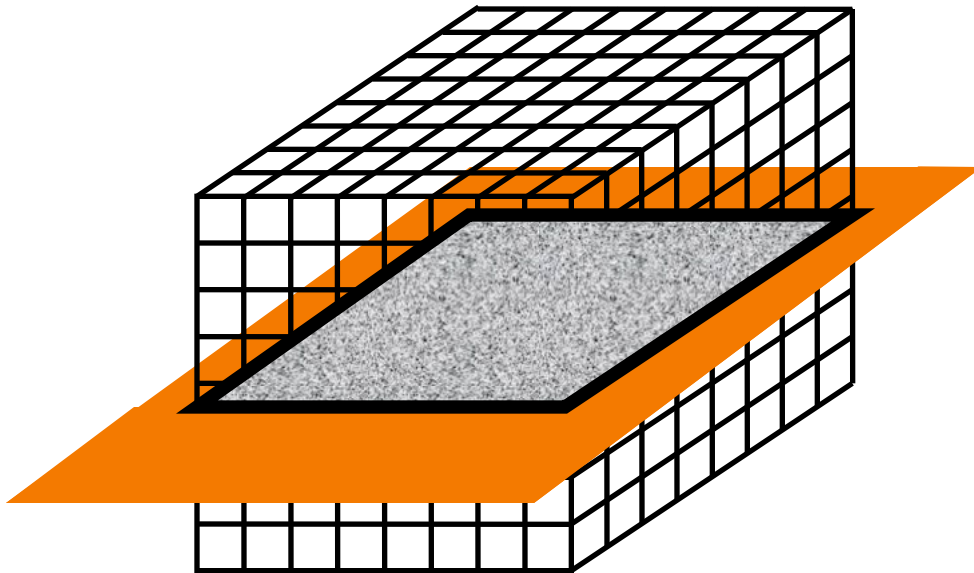


Visible Human
(National Library of Medicine)

Voxel Display



- Ray casting
 - Integrate density along rays: compositing!

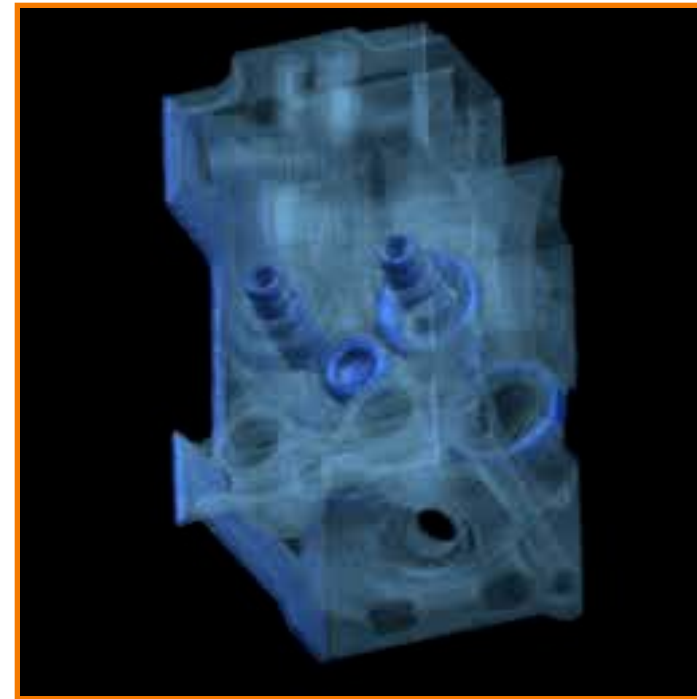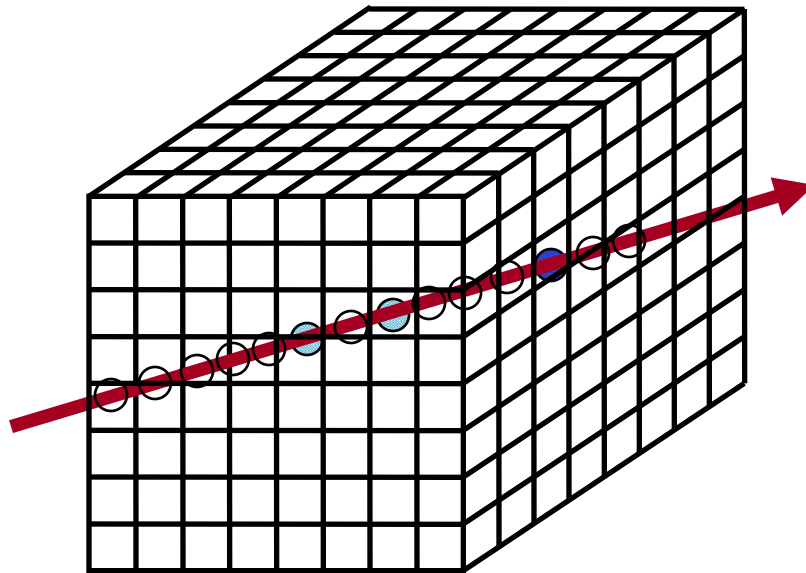


Engine Block
Stanford University

Voxel Display



- Extended ray-casting
 - **Transfer functions:**
Map voxel values to opacity and material
 - Normals (for lighting)
from density gradient

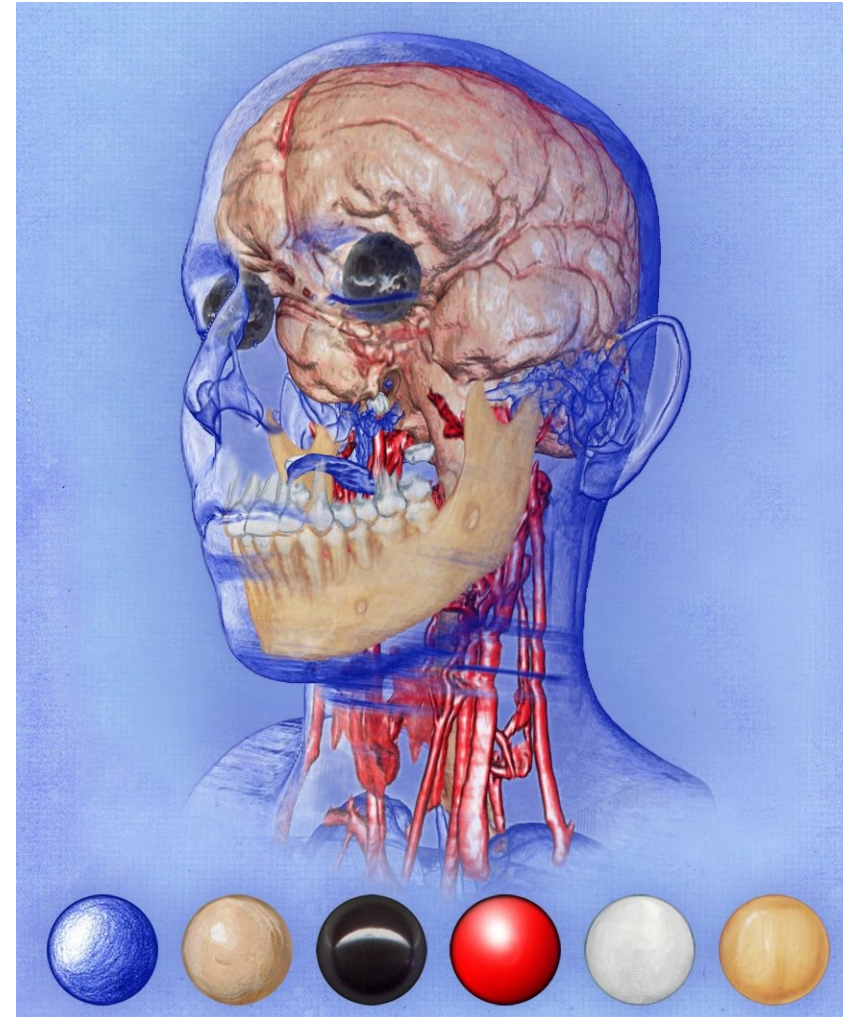

Bruckner et al. 2007

Voxels




- Advantages
 - Simple, intuitive, unambiguous
 - Same complexity for all objects
 - Natural acquisition for some applications
 - Trivial boolean operations
- Disadvantages
 - Approximate
 - Not affine invariant
 - Expensive display
 - Large storage requirements

Voxels



- What resolution should be used?

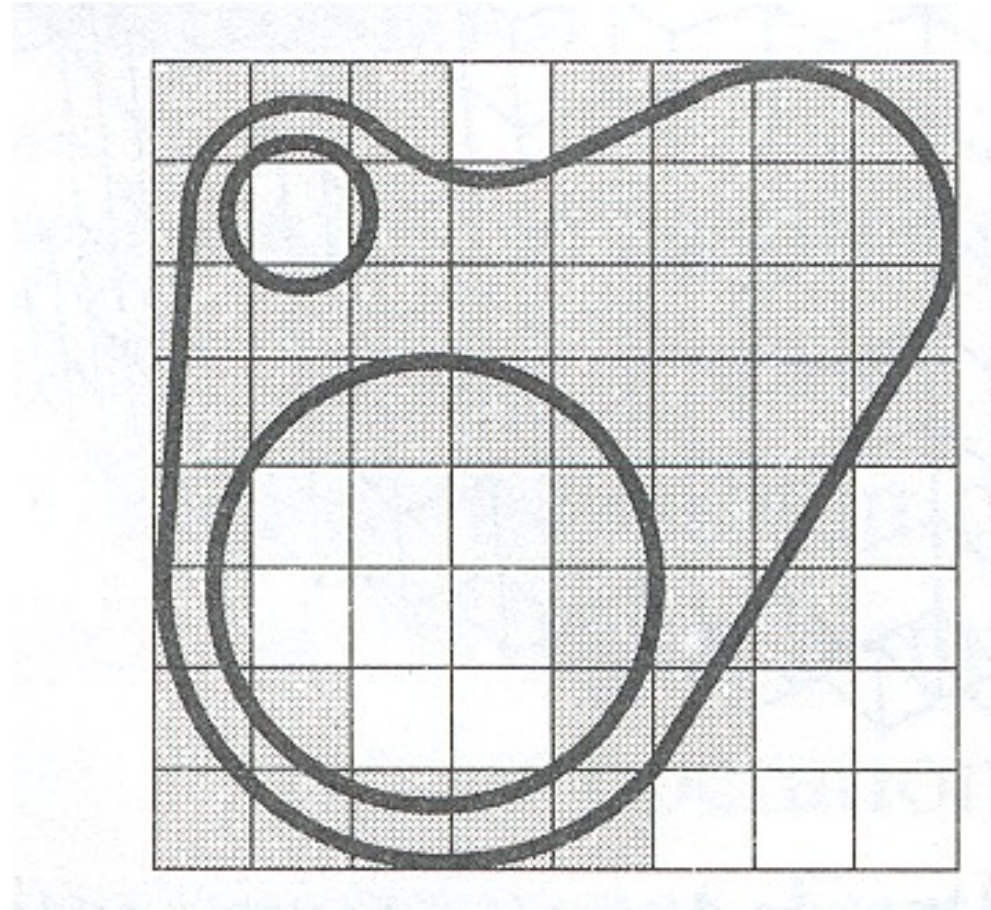


FvDFH Figure 12.21


Quadrees & Octrees



- Refine resolution of voxels hierarchically
 - More concise and efficient for non-uniform objects

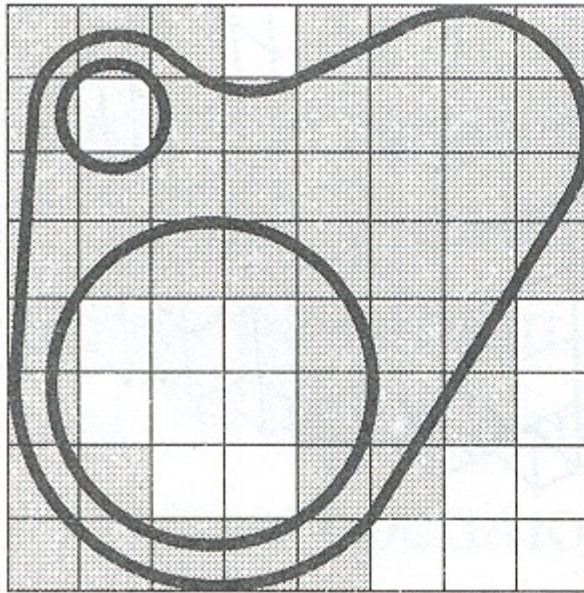

Uniform Voxels


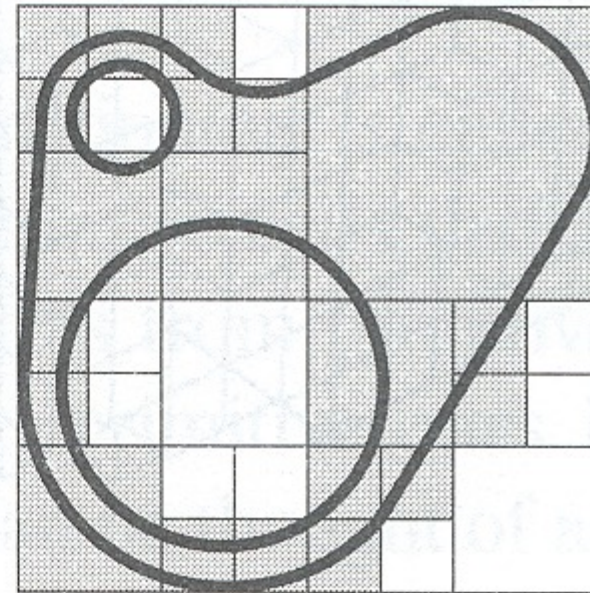


Quadtree (Octree in 3D)

Quadtree Processing




- Hierarchical versions of voxel methods
 - Finding neighbor cell requires traversal of hierarchy: expected/amortized $O(1)$

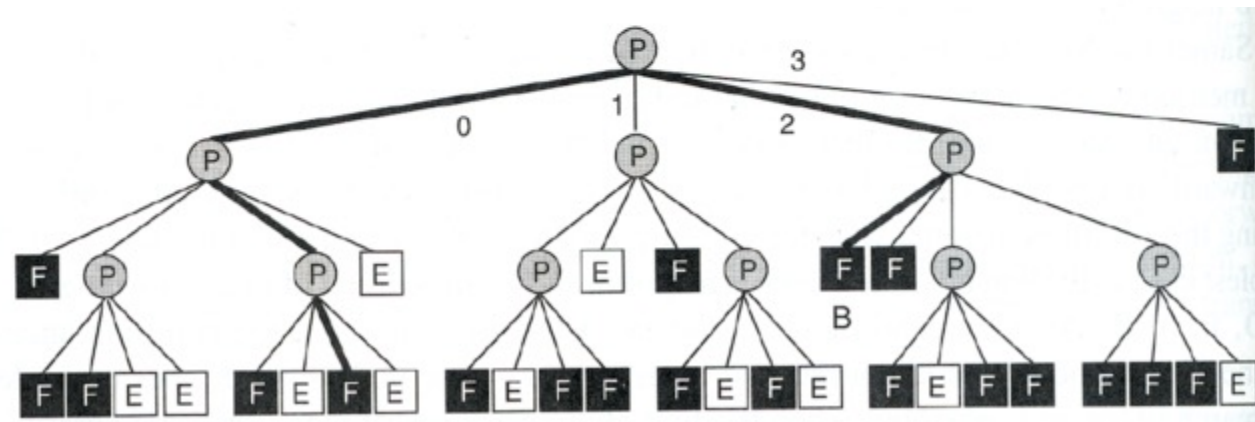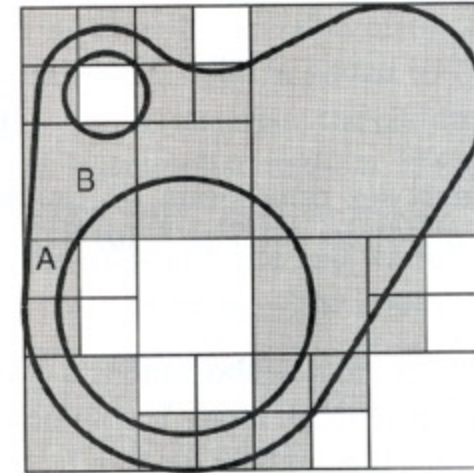

FvDFH Figure 12.25

Quadtree Boolean Operations

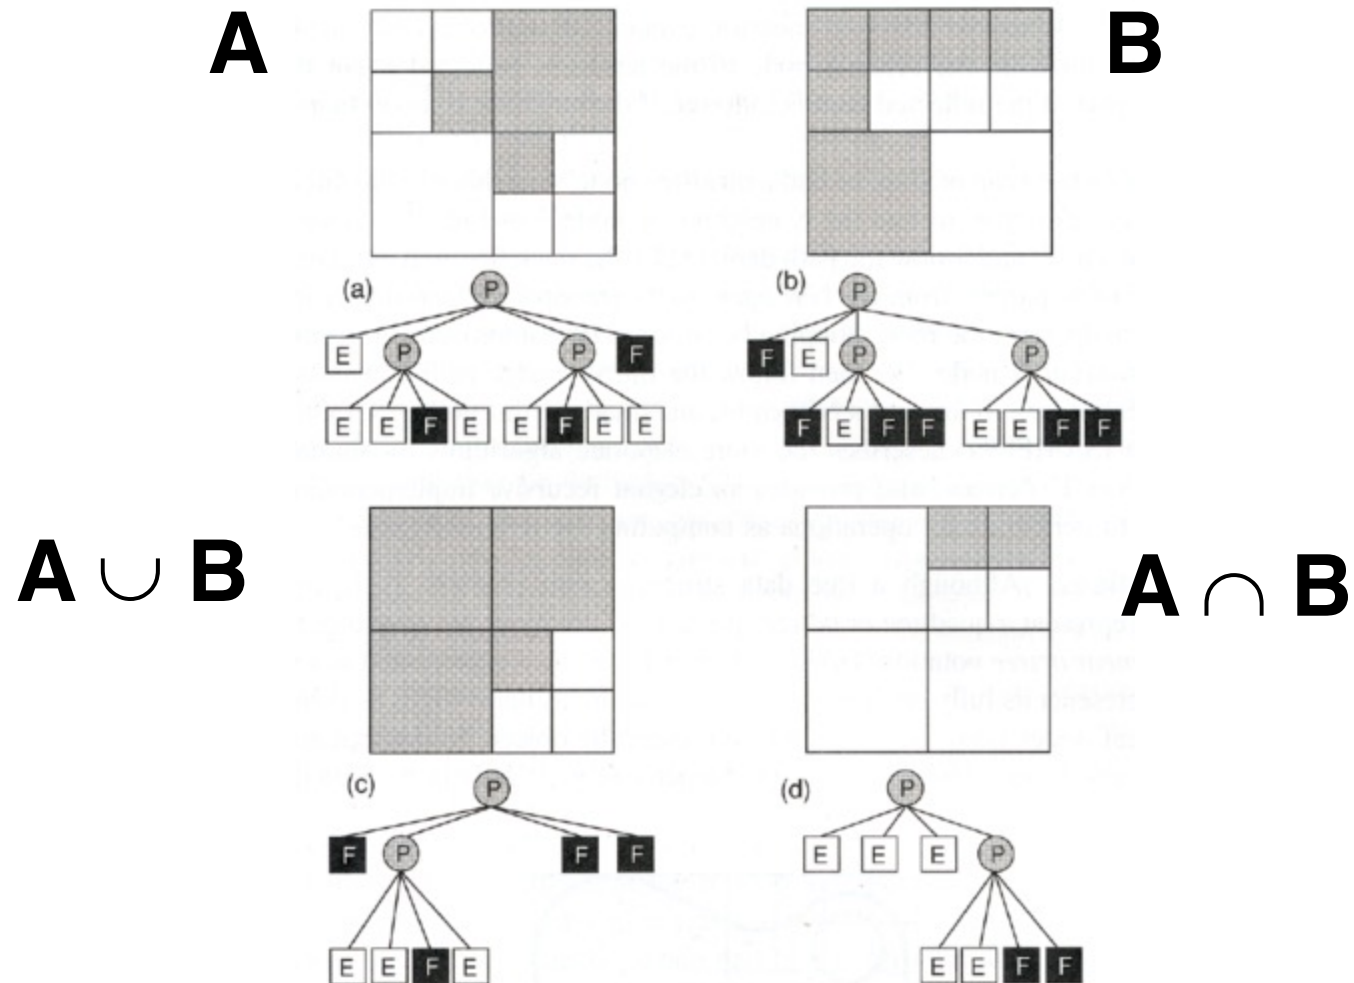


FvDFH Figure 12.24

3D Object Representations




- Raw data
 - Range image
 - Point cloud
- Surfaces
 - Polygonal mesh
 - Subdivision
 - Parametric
 - Implicit
- Solids
 - Voxels
 - **BSP tree**
 - CSG
 - Sweep
- High-level structures
 - Scene graph
 - Application specific


BSP Trees



Object

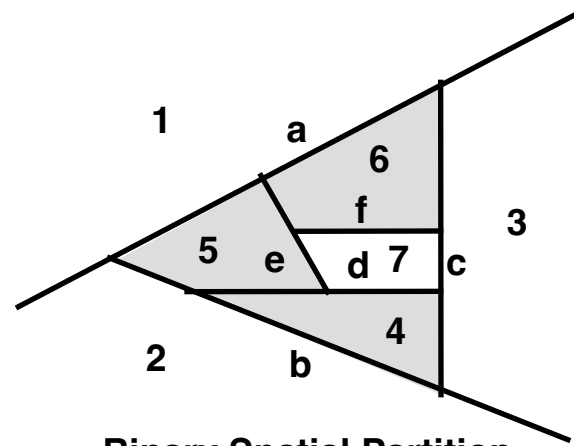

Binary Spatial Partition

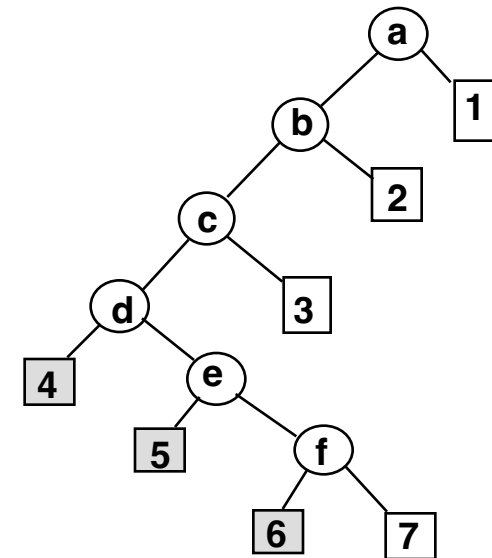


Binary Tree


BSP Trees



- Key properties
 - visibility ordering (later)
 - hierarchy of convex regions (useful for collision)

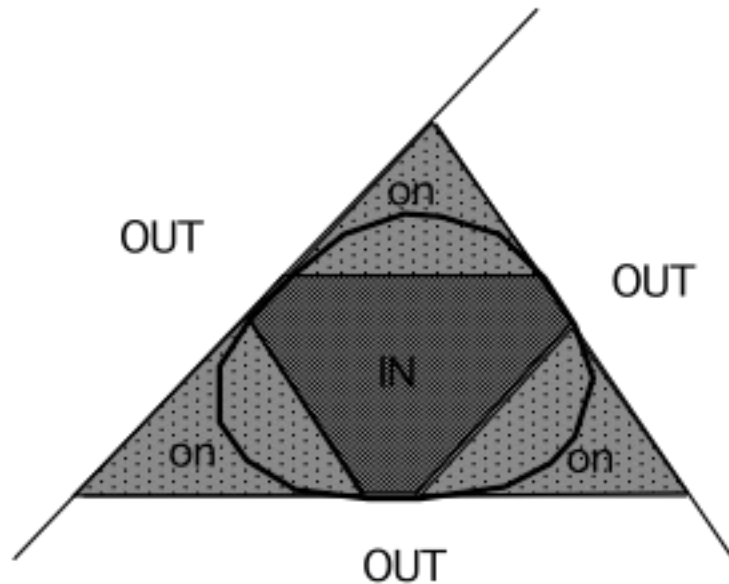

1st level Approximation

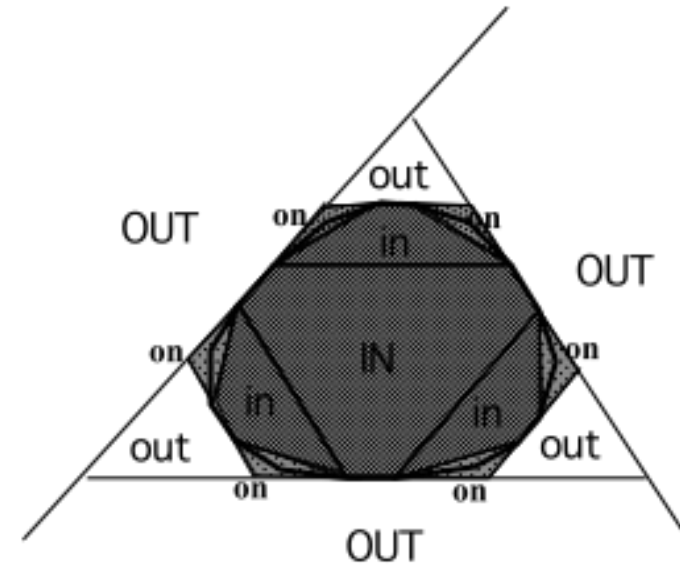

2nd level Approximation

3D Object Representations




- Raw data
 - Range image
 - Point cloud
- Surfaces
 - Polygonal mesh
 - Subdivision
 - Parametric
 - Implicit
- Solids
 - Voxels
 - BSP tree
 - **CSG**
 - Sweep
- High-level structures
 - Scene graph
 - Application specific

Constructive Solid Geometry (CSG)



- Represent solid object as hierarchy of boolean operations
 - Union
 - Intersection
 - Difference

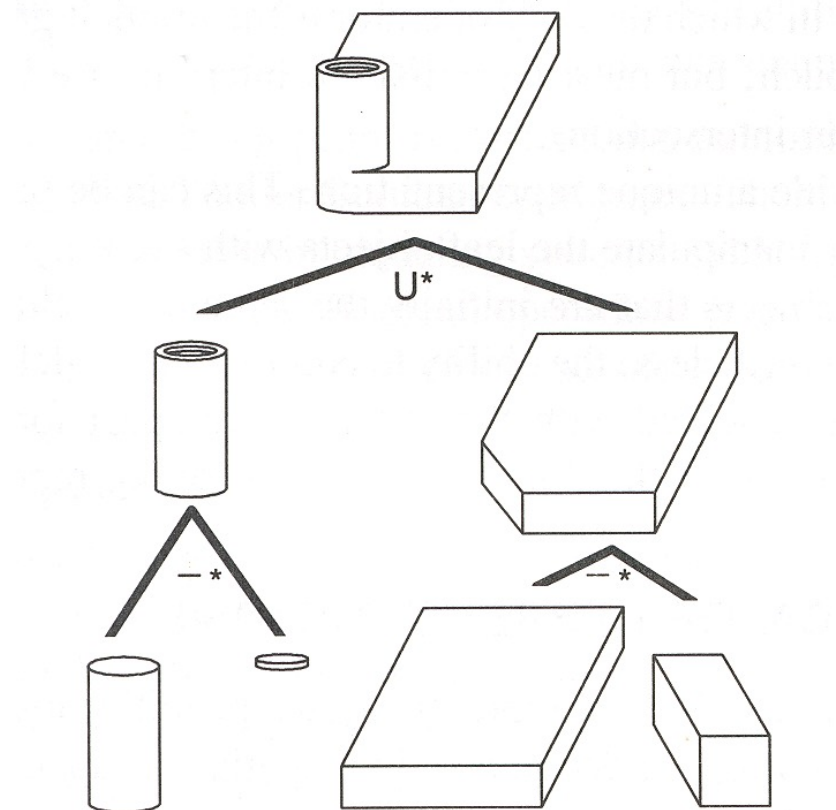


FvDFH Figure 12.27

CSG Acquisition




- Interactive modeling programs
 - Intuitive way to design objects

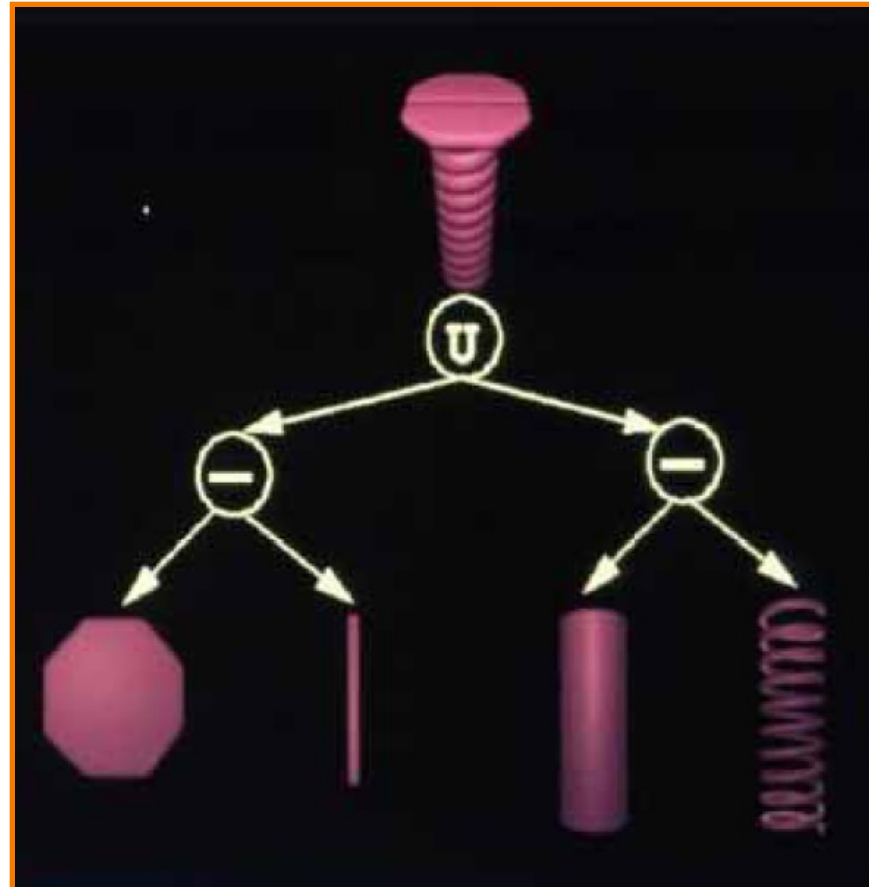

CSG Acquisition



- Interactive modeling programs
 - Intuitive way to design objects

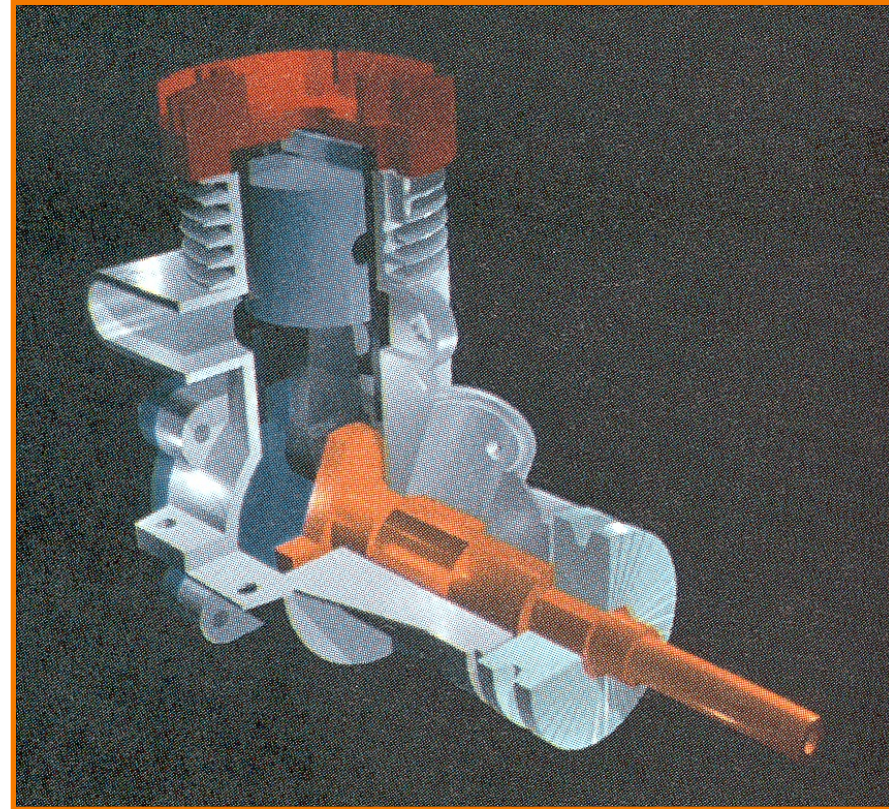


H&B Figure 9.9

CSG Boolean Operations



- Create a new CSG node joining subtrees
 - Union
 - Intersection
 - Difference

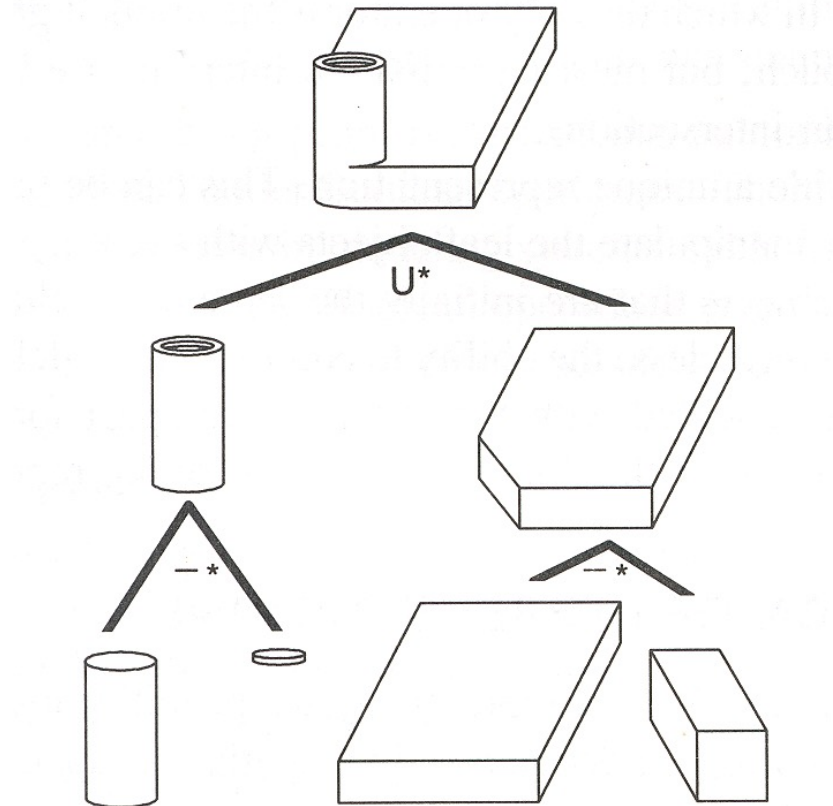


FvDFH Figure 12.27

CSG Acquisition





- Interactive modeling programs
 - Intuitive way to design objects

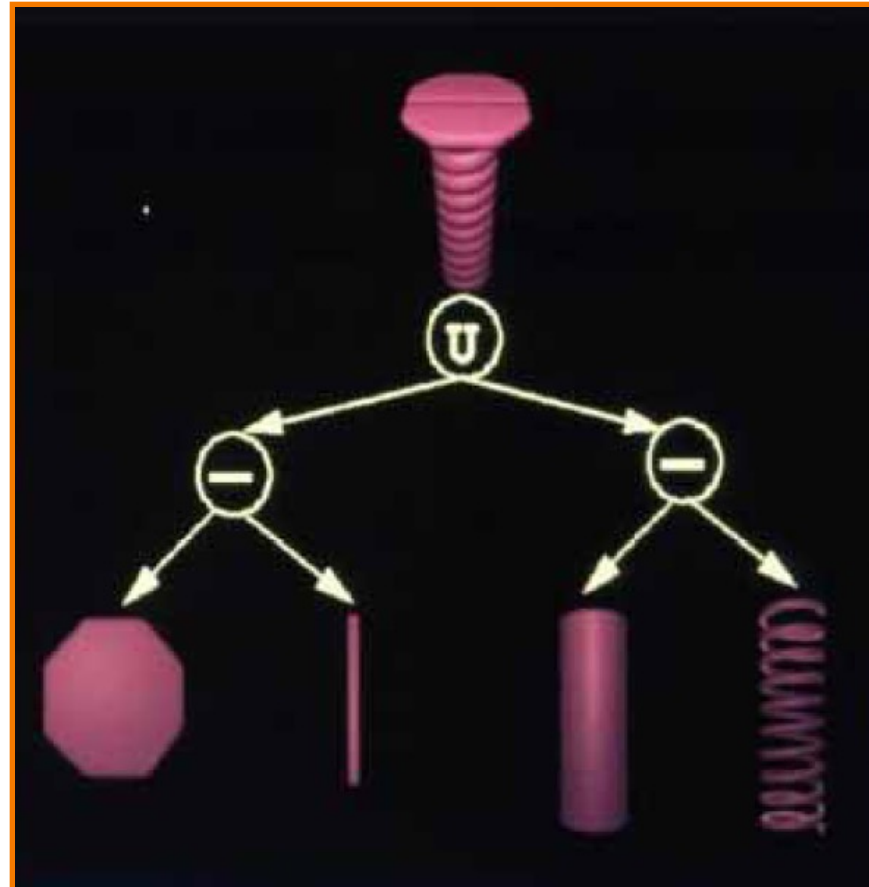

CSG Display & Analysis



- Ray casting

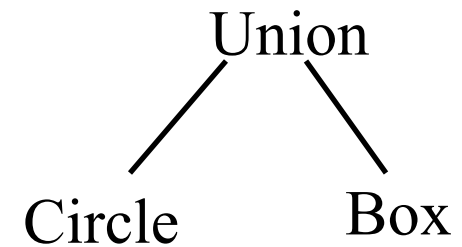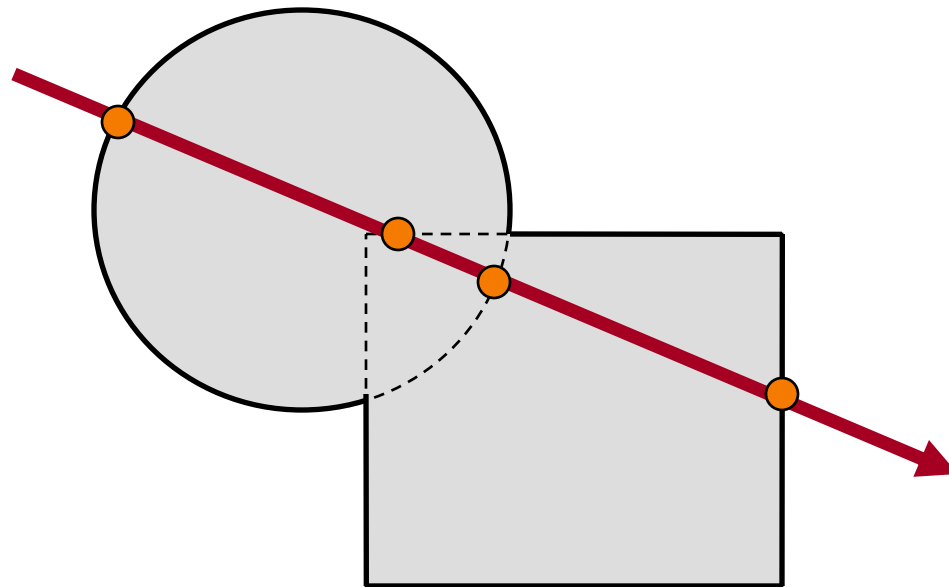

3D Object Representations




- Raw data
 - Range image
 - Point cloud
- Surfaces
 - Polygonal mesh
 - Subdivision
 - Parametric
 - Implicit
- Solids
 - Voxels
 - BSP tree
 - CSG
 - Sweep
- High-level structures
 - Scene graph
 - Application specific

Sweeps



- Swept volume
 - Sweep one curve along path of another curve

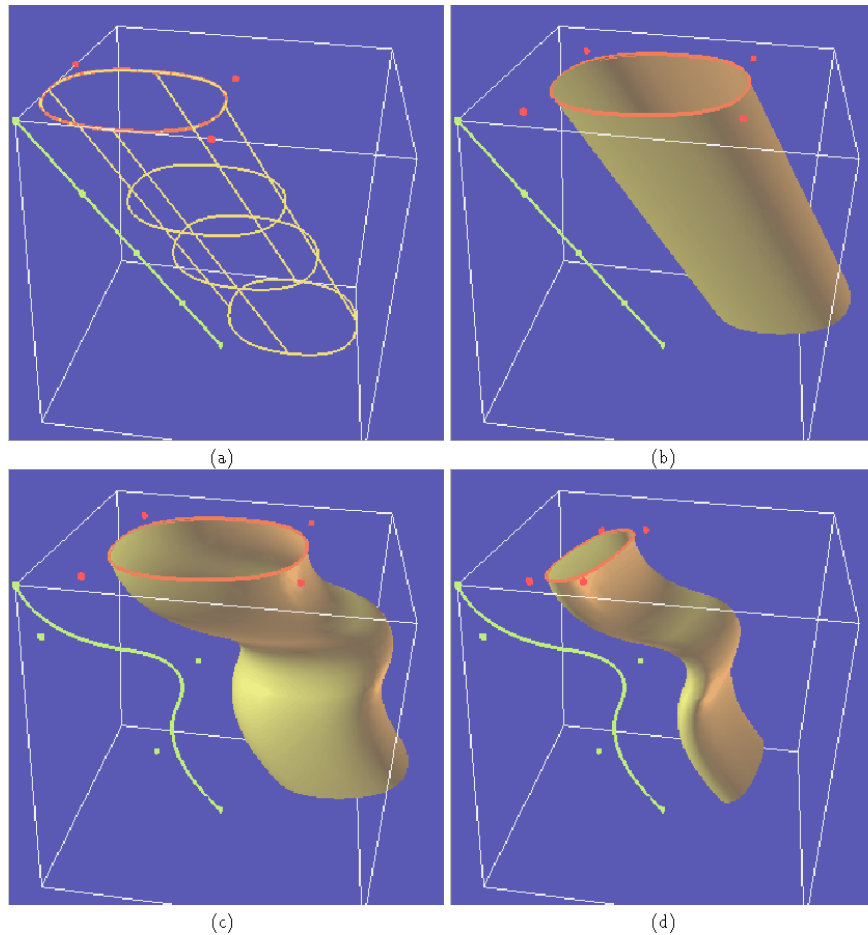


Demetri Terzopoulos

Sweeps



- Surface of revolution
 - Take a curve and rotate it about an axis

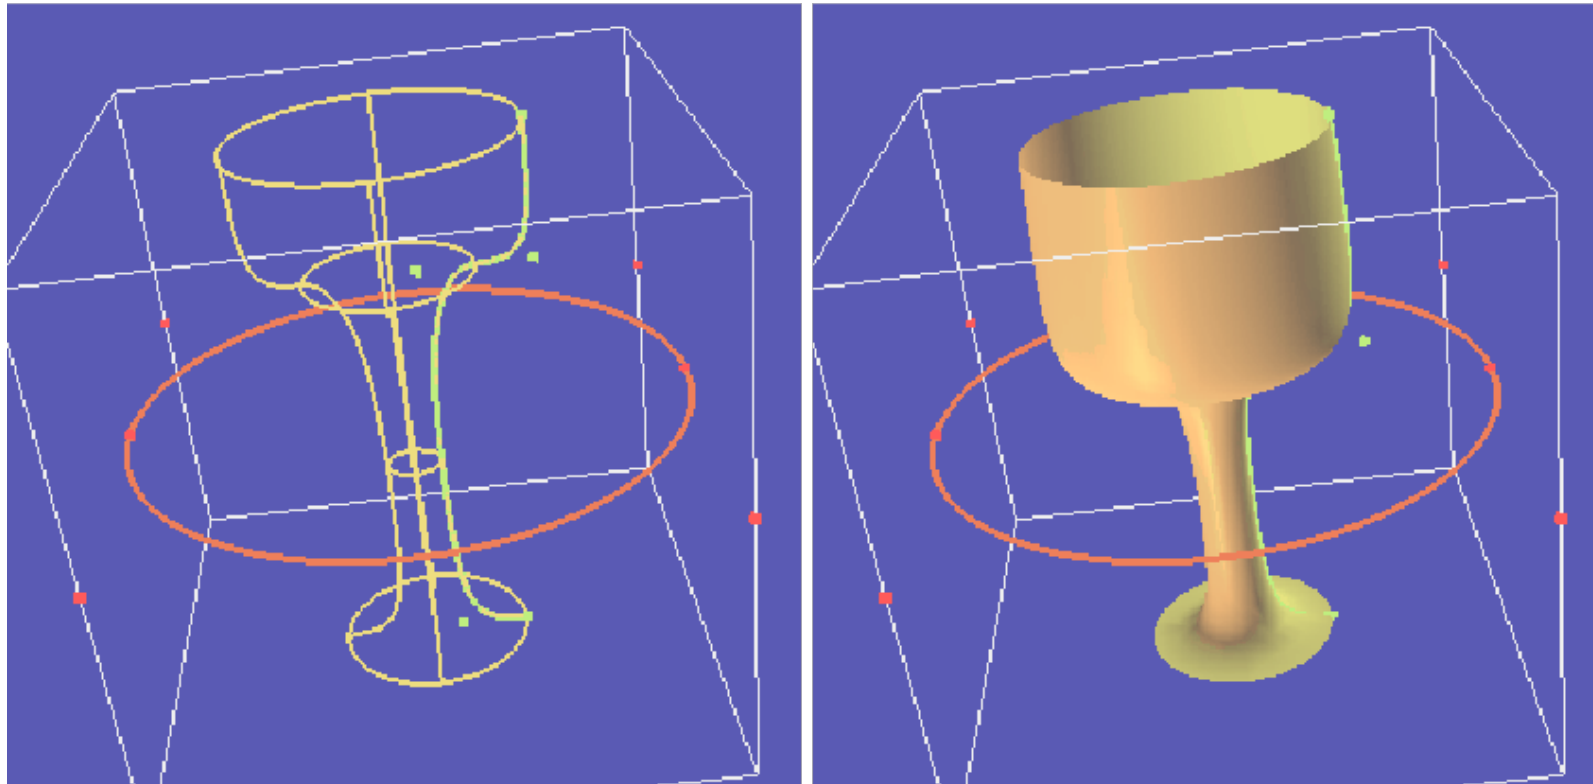


Demetri Terzopoulos

Sweeps



- Surface of revolution
 - Take a curve and rotate it about an axis

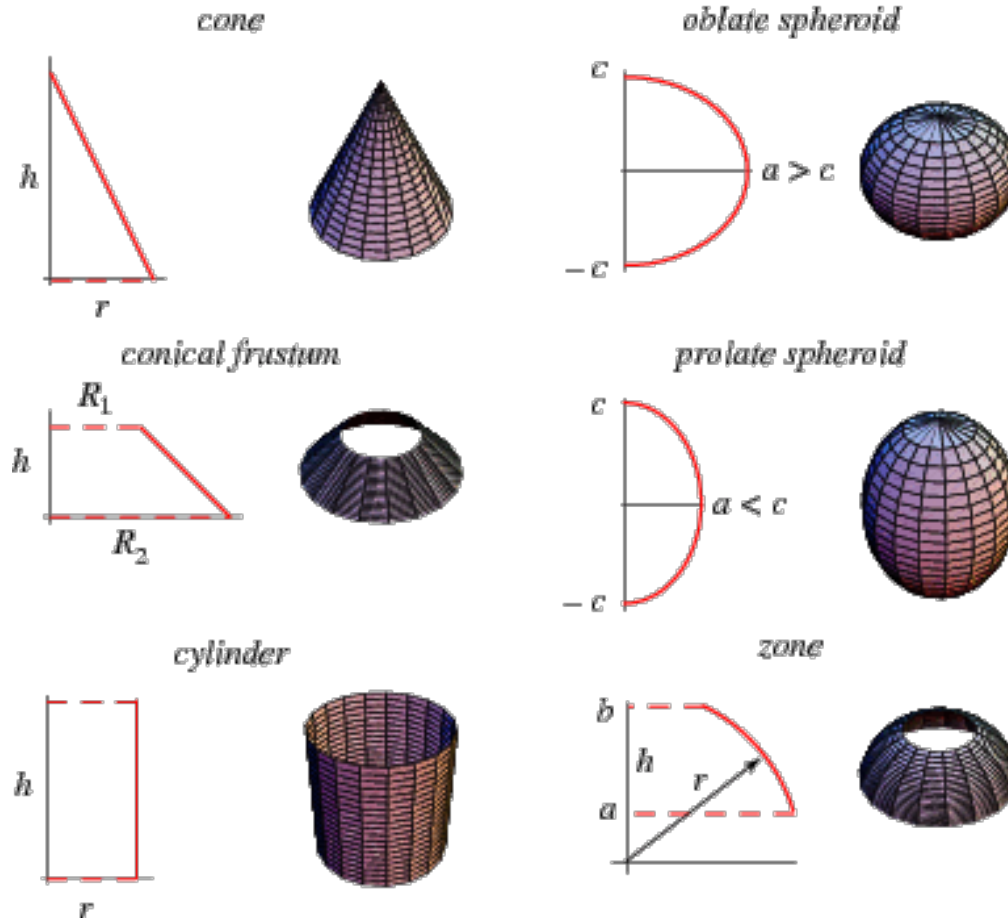

Summary



Feature	Voxels	Octree	BSP	CSG
Accurate	No	No	Some	Some
Concise	No	No	No	Yes
Affine invariant	No	No	Yes	Yes
Easy acquisition	Some	Some	No	Some
Guaranteed validity	Yes	Yes	Yes	No
Efficient boolean ops	Yes	Yes	Yes	Yes
Efficient display	No	No	Yes	No