3D Hidden Surface Removal

Thomas A. Funkhouser

Course Outline

- User interaction
- Signal processing
- 2D rendering
  - Geometry
  - Transforms, clipping
- 3D rendering
  - Geometry
  - Transforms, clipping
  - Viewing, projections
  - **Hidden surface removal**
  - **Lighting**
  - **Texture mapping**
  - **Ray tracing, radiosity**

  and more ....

Rendering Pipeline

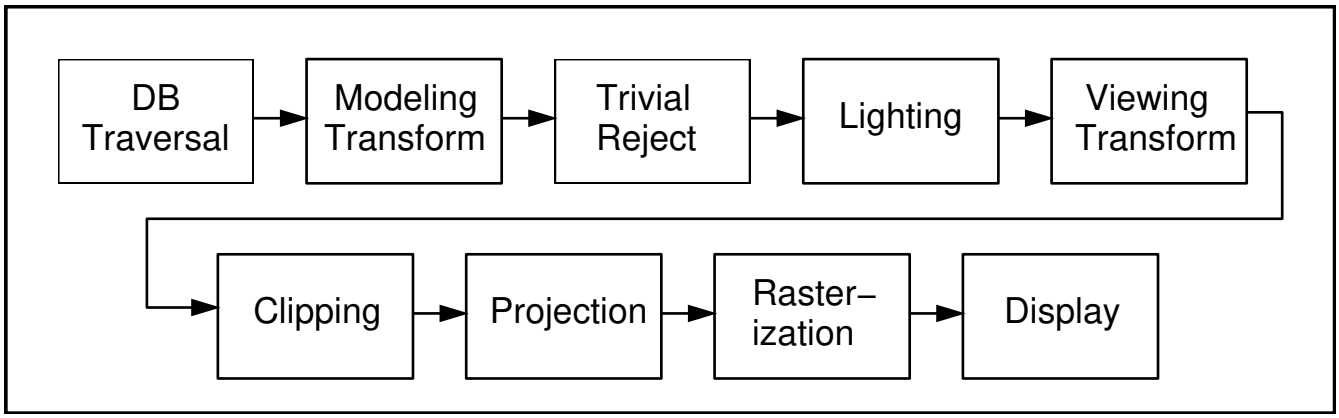

Sample Rendering Pipeline

Hidden Surface Removal (HSR)

- **Motivation**
- **Algorithms for HSR**
  - Back–face detection
  - Painter's algorithm
  - Ray casting
  - Scan–line
  - Z–buffer
  - Area subdivision
- **Tradeoffs**

HSR Motivation

- **Surfaces may be back–facing:**

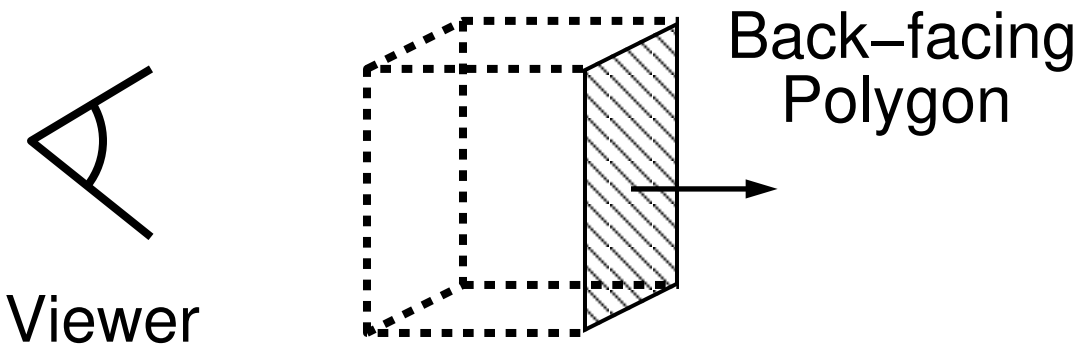

- **Surfaces may be occluding:**

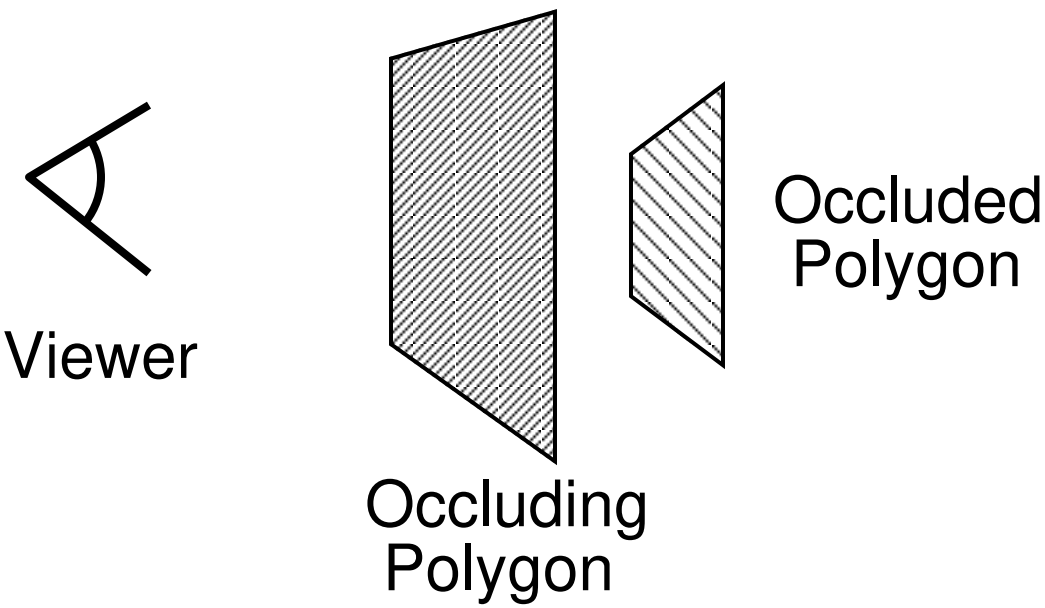

HSR Motivation (cont)

- **Surfaces may be overlapping:**

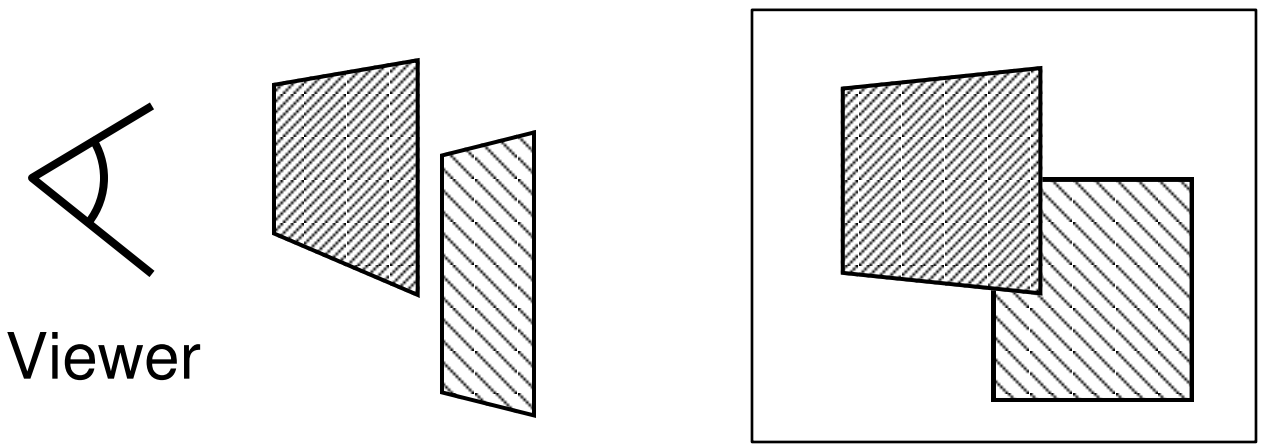

- **Surfaces may be intersecting:**

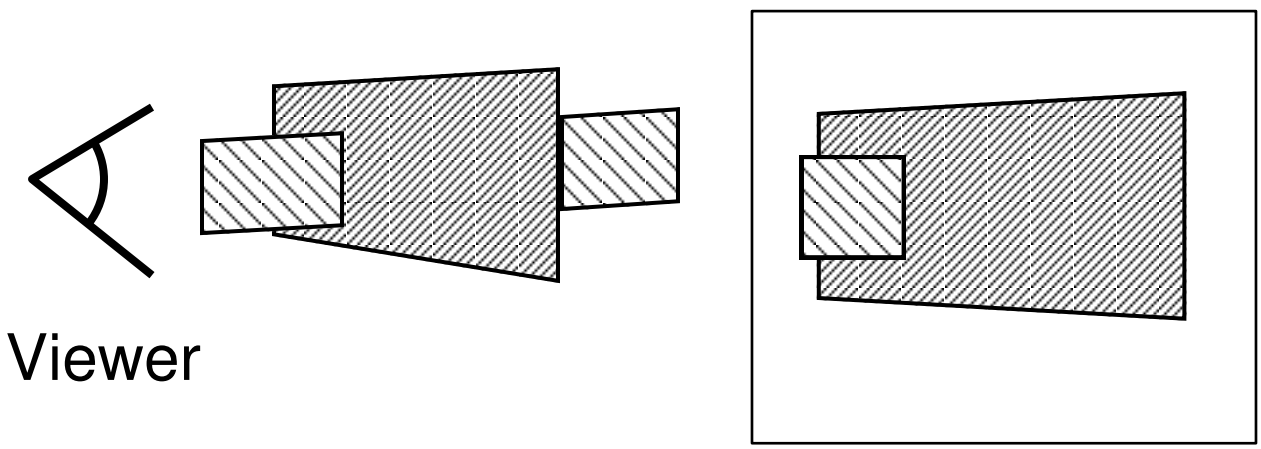

HSR Algorithms

- Back–face detection
- Depth sort
- Ray casting
- Scan–line
- Z–buffer
- Area subdivision

Back–Face Detection

- Do not render any surface oriented away from viewer

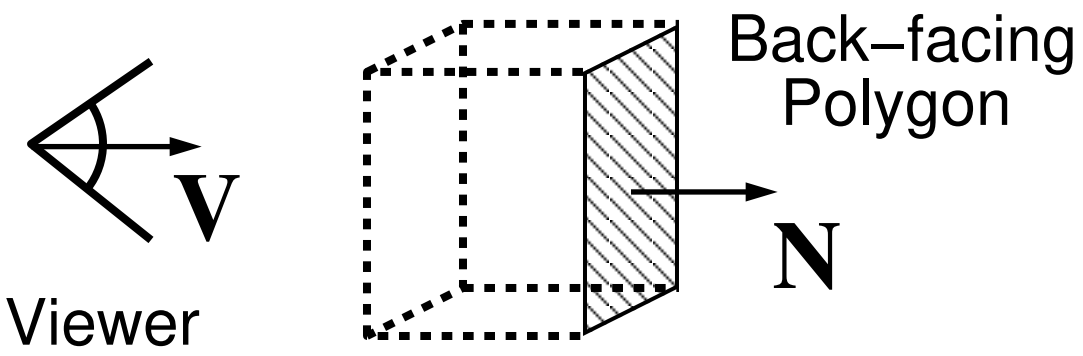

A polygon is backfacing to the viewer if $V \bullet N > 0$

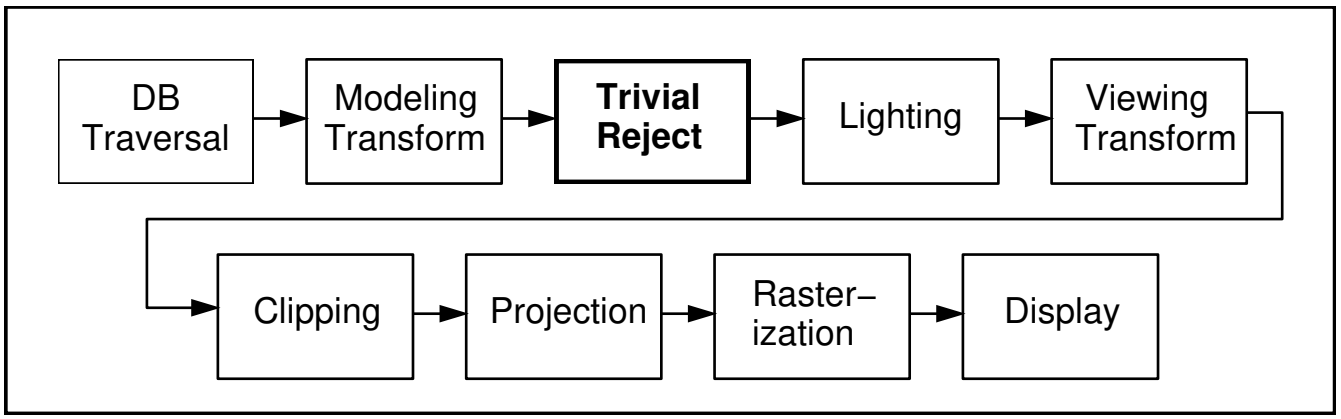

Depth Sort

- **Painter's Algorithm:**
  1) Sort surfaces in order of decreasing maximum depth
  2) Scan convert surfaces in order starting with ones of greatest depth, reordering as necessary based on overlaps.

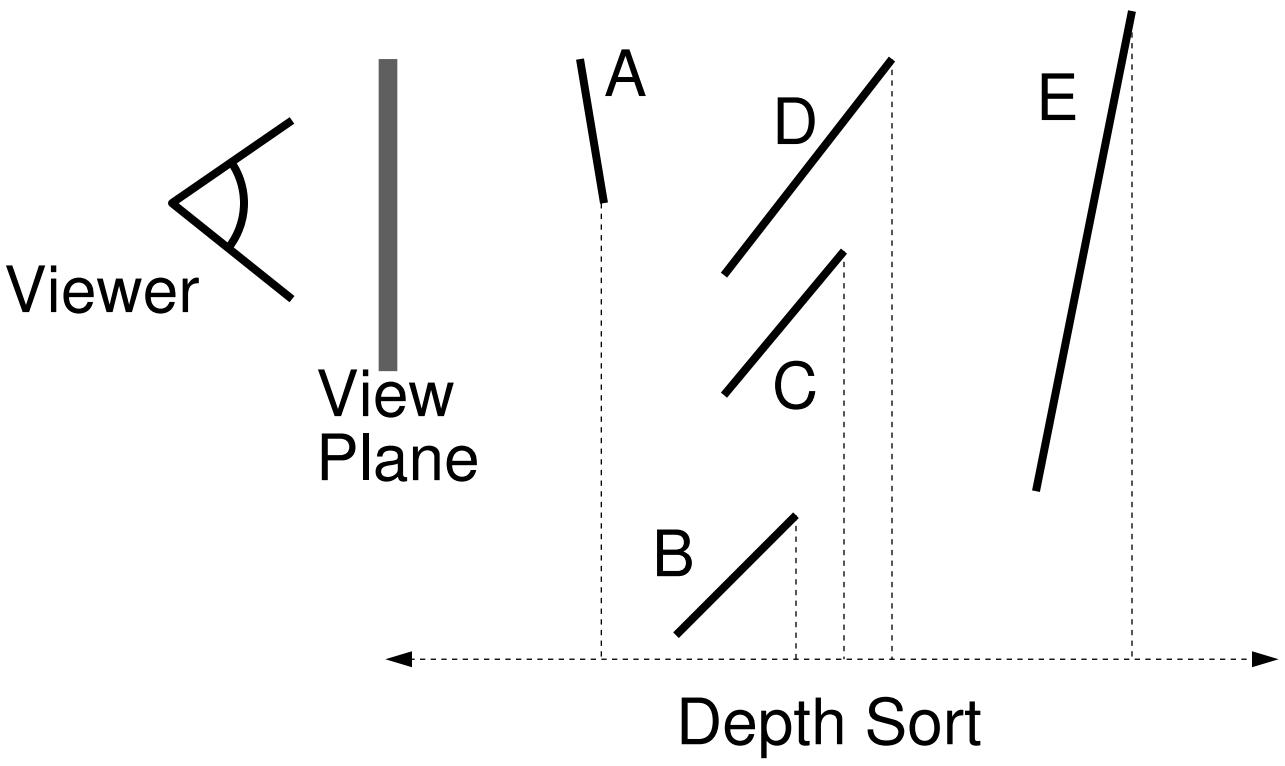

Depth Sort (cont)

- **Comments**
  - O(nlogn)
  - Intersecting polygons must be subdivided
  - Sort order has lots of frame–to–frame coherence during walkthroughs
  - Must fully compute every pixel for every polygon
  - Used most often with BSP or static list–ordering

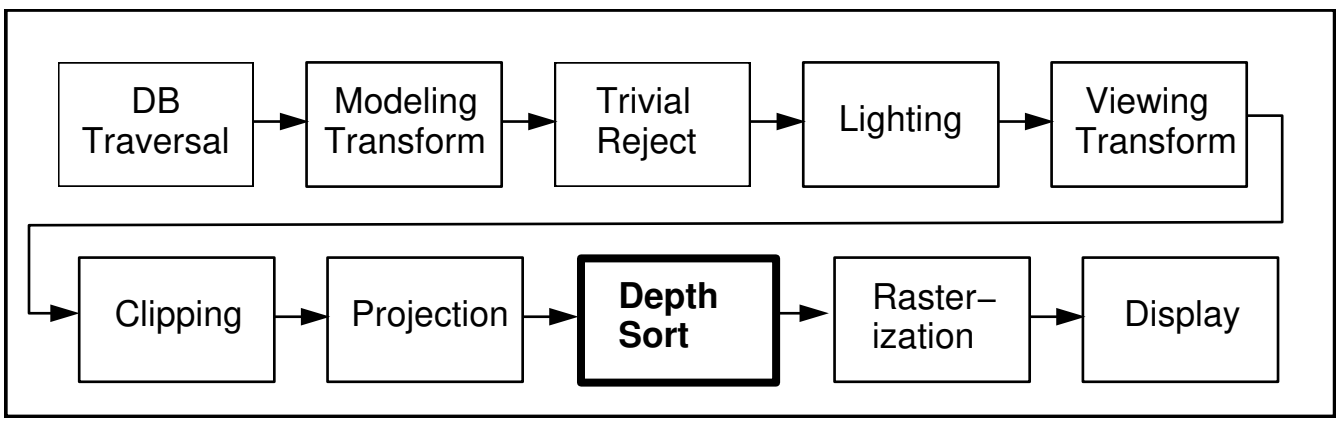

Ray Casting

- **Algorithm:**

  Cast ray from viewpoint through each pixel to find front–most surface

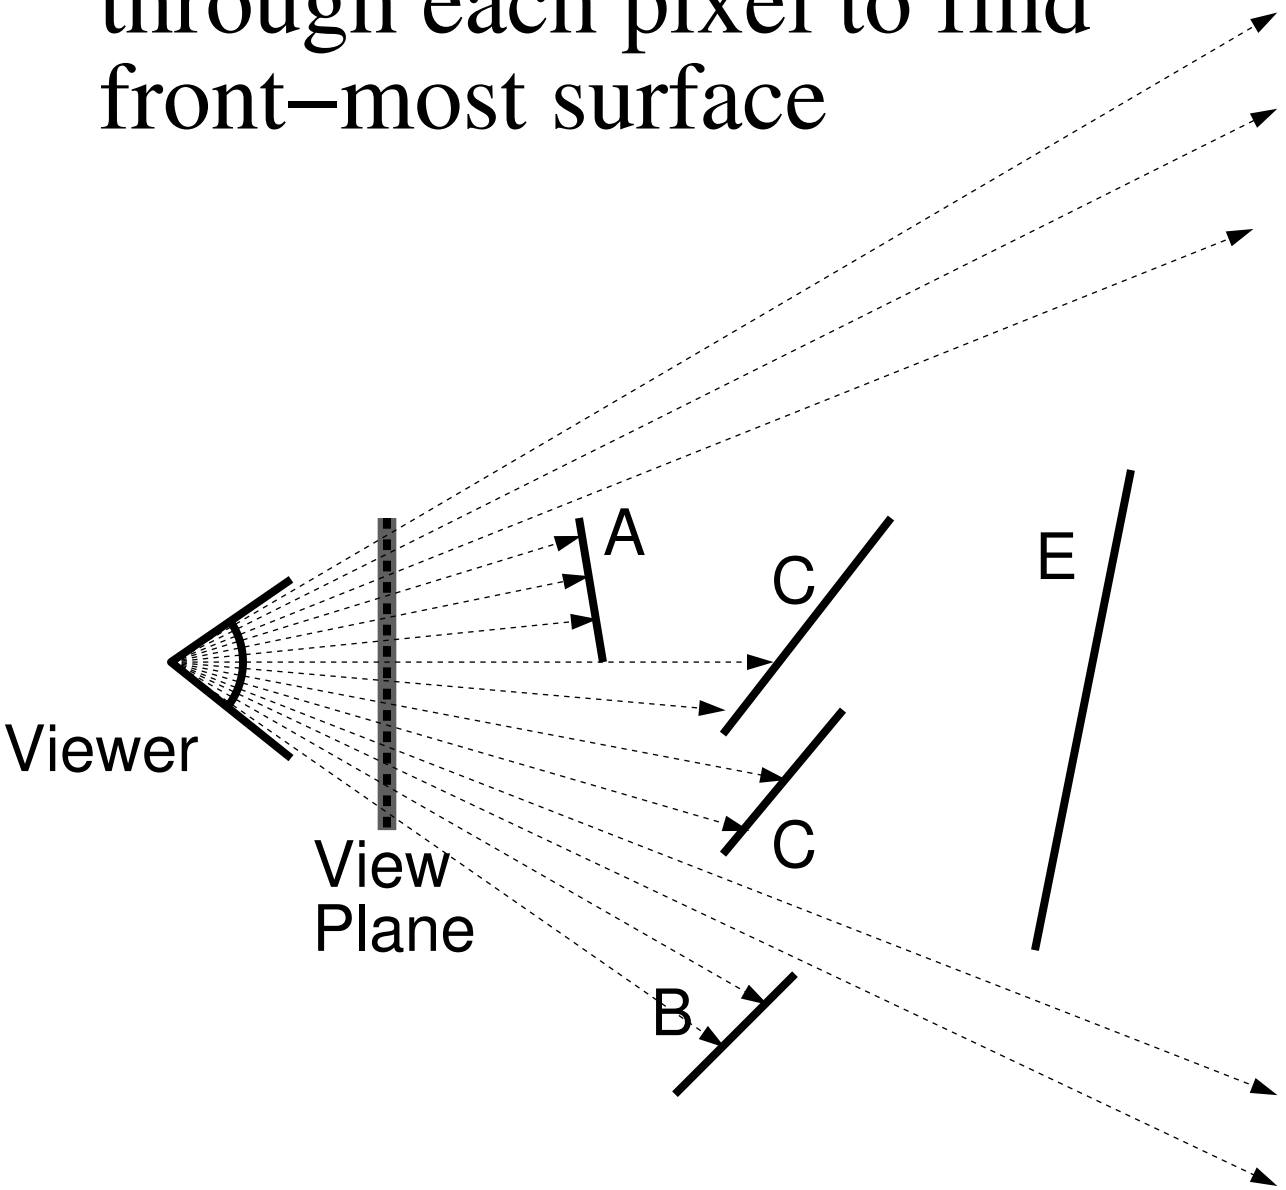

Ray Casting (cont)

- **Comments**
  - O(plogn) for p pixels
  - May (or may not) utilize pixel–to–pixel coherence
  - Conceptually simple, but not generally used

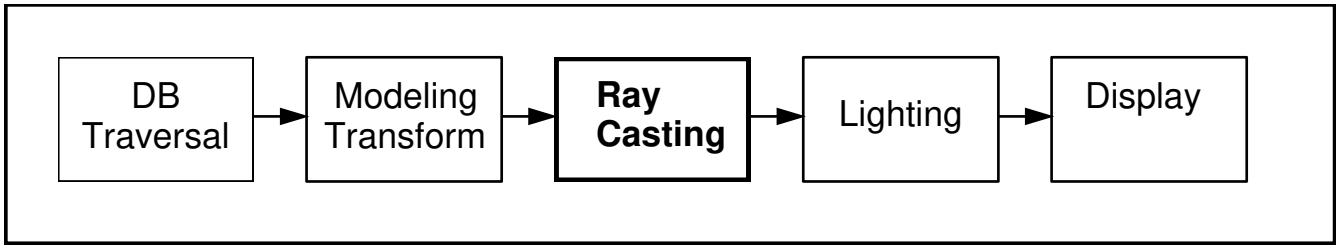

Z–Buffer

- **Algorithm:**
  - Store color ***and depth*** of closest surface for each pixel in frame buffer
  - As scan convert, update only pixels whose (interpolated) depth is closer than the depth stored in the frame buffer

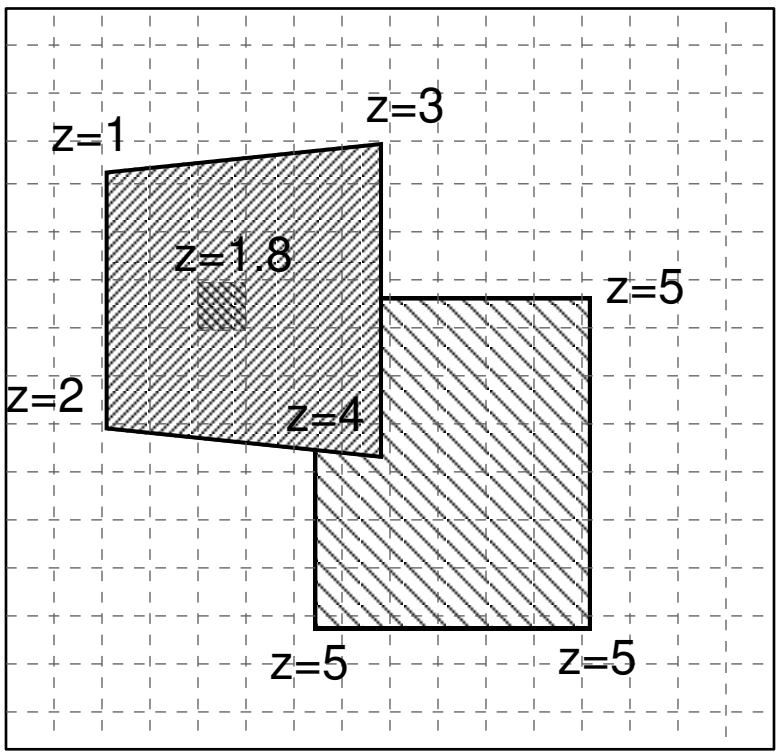

Z Buffer (cont)

- **Comments**
  - Polygons can be rasterized in any order
  - Requires lots of memory (e.g., 1K x 1K x 24 bits)
  - Requires per pixel processing, subject to aliasing (A–buffer)
  - Commonly implemented in hardware

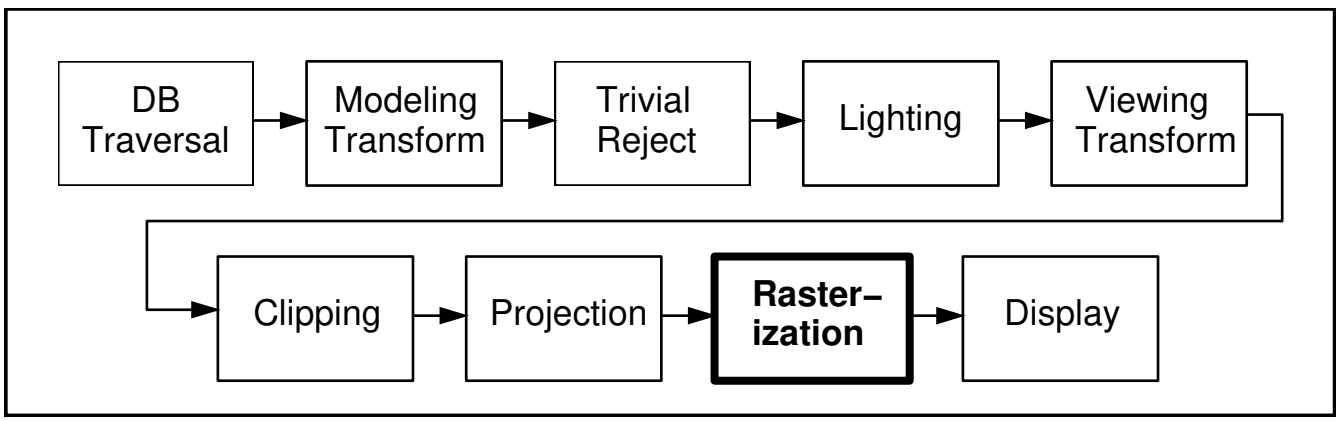

Scan–Line

- **Algorithm:**

  For each scan line, construct ***spans*** and sort by depth

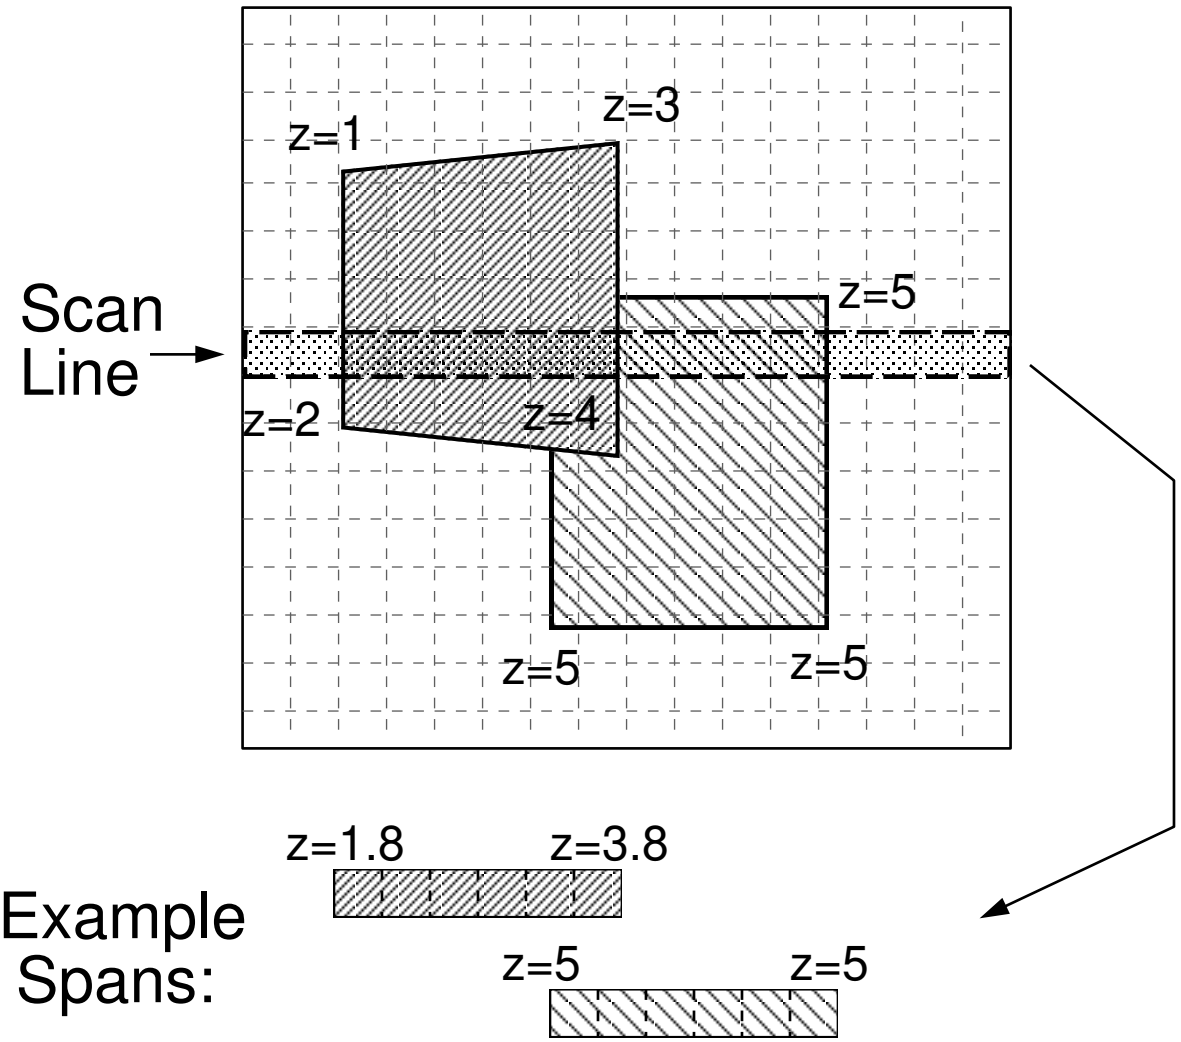

Scan–Line

- **Comments**
  - Fully compute only front–most pixels
  - Coherence along scan lines
  - Commonly implemented in software

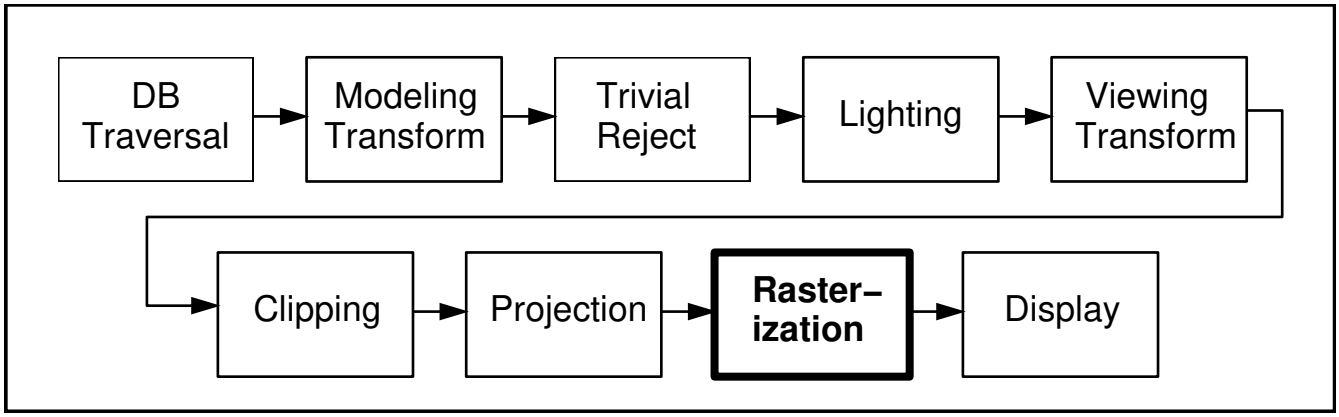

Area Subdivision

- **Warnock Algorithm:**
  - Fill area if:
    - All surfaces are outside
    - Only one surface intersects
    - One surface occludes other surfaces within area.
  - Otherwise, subdivide

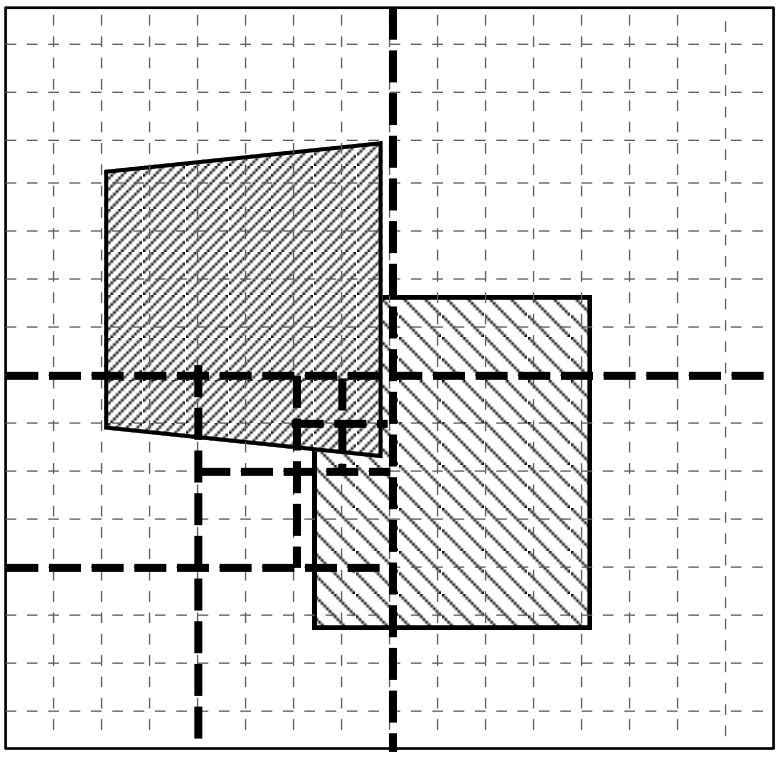

Conclusion

- **Hidden surface algorithms**
  - Back–face detection
  - Depth sort
  - Ray casting
  - Z–buffer
  - Scan–line
  - Area subdivision
- **Hardware**
  - Z–buffer
- **Software**
  - Depth sort
  - Scan–line