

Disjoint Set Union

Maintain a collection of disjoint sets under find and union.

Initially set $i = \{i\}$ for $1 \leq i \leq n$

find (x): Return the name of the set containing element x

union (A, B): Replace set A by the union of sets A and B , destroying the old sets.

Name each set by some (arbitrary) element in it.

Applications:

FORTRAN EQUIVALENCE and Common statement

computing minimum spanning trees

many other graph algorithms


• unification

Tree Data Structure

Represent each set by a tree whose nodes are the elements of the set.

The root is the set name (can store any info at the root)
Each node points to its parent. (M. Fischer and Galler)

$\{a,b,c,d,e,f\}$

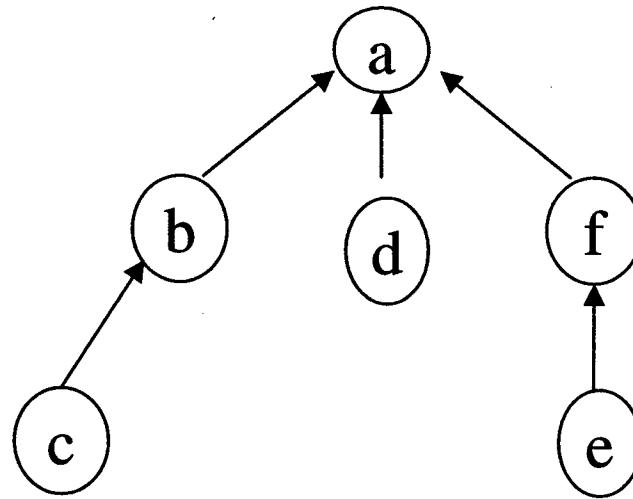

find(x): Follow parent pointers from x to root,
return root.

cost = # nodes on find path


unite(x,y): Make root x the parent of root y (x is the
name of the new set)

cost = 1


Total cost = $\Theta(mn)$



Union

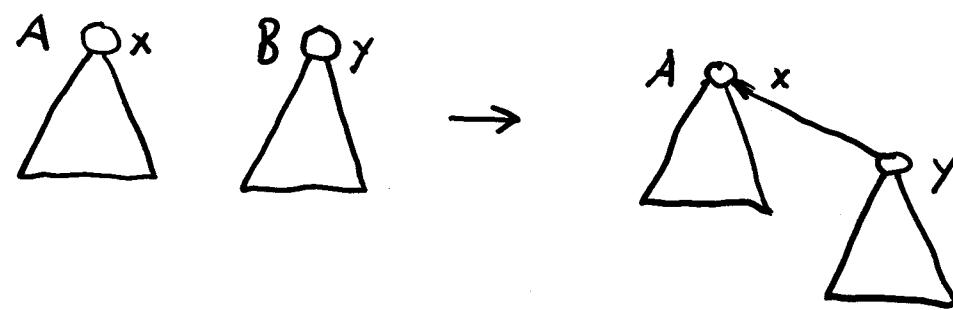

or

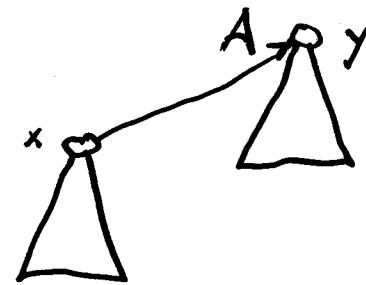

Basis for improvement: the structure of each tree is arbitrary;
only the partition defined by the node sets matters.

Union by size: maintain at each root the tree size (# nodes).

unite (x,y): if size (x) \geq size (y) make x the parent of y
if size (x) \leq size (y) make y the parent of x
(McIlroy)

Union by rank: maintain a rank at each root, initially 0.


unite (x,y): if rank (x) $>$ rank (y) make x the parent of y
if rank (x) $<$ rank (y) make y the parent of x
if rank (x) = rank (y) make x the parent of y and
increase the rank of x by 1

rank = tree height

With either union by size or union by rank, the height of a k -node tree is $\leq \lg k$


\Rightarrow total cost = $\Theta(m \log n)$

Path Compression: after a find, make each node along the find path a child of the root (Tritter)

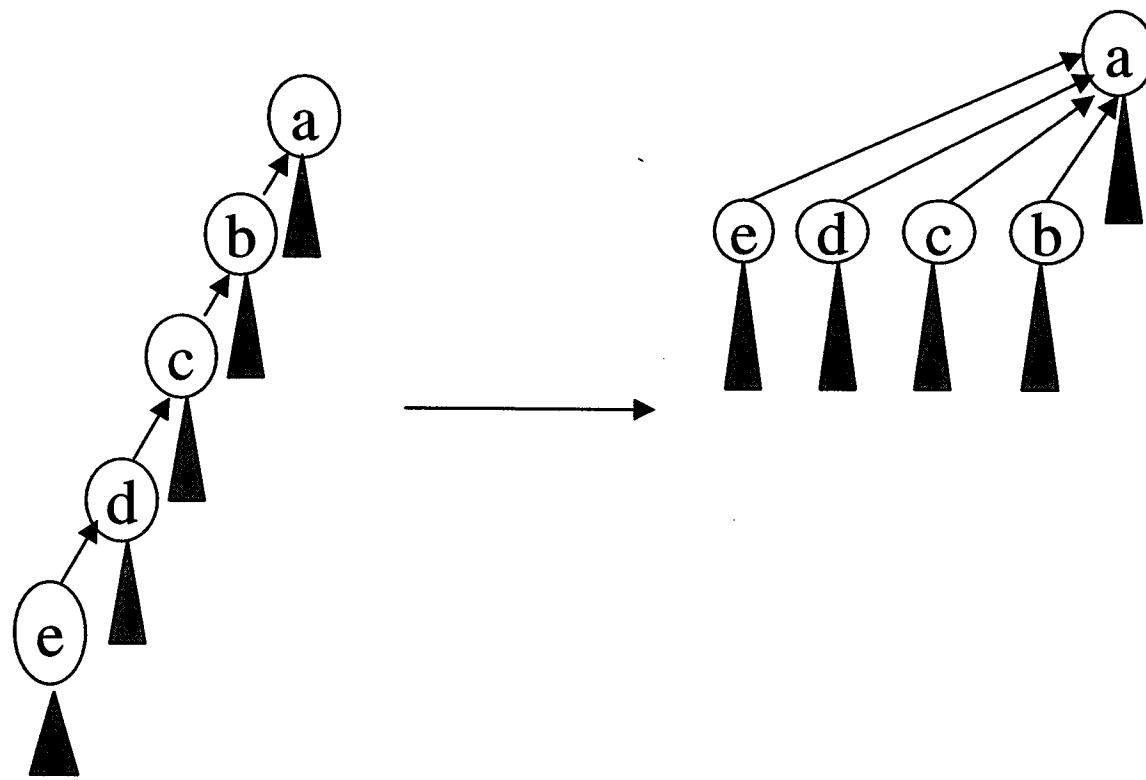

Compressions shorten paths and thus make later finds cheaper (but cost a constant factor)


Find with Compression

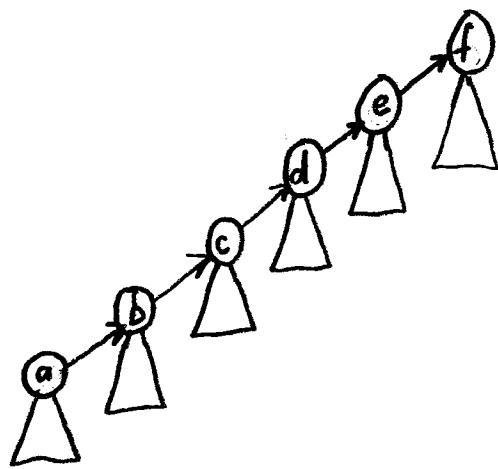


compress

split


halve

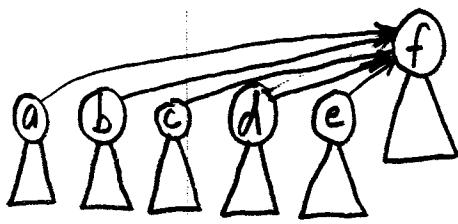

all node point
to root

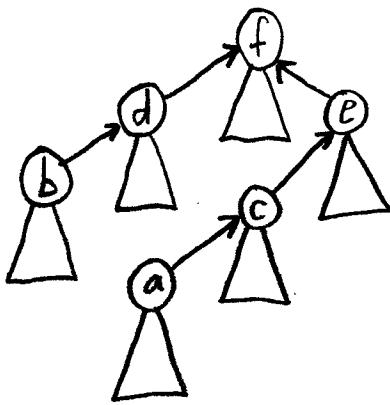

each node points
to grandparent

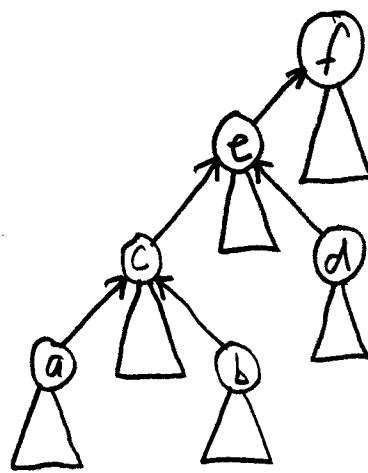

every other node points
to grandparent

How efficient is path compression?

Without union by size or rank, $O(m \log n)$, tight for $m=n$

With union by size or rank, $O(m \alpha(n))$, tight for $m=n$,

where α is an inverse of Ackerman's function:

for $k \geq 0, j \geq 1$

$$A_0(j) = j + 1, A_k(j) = A_{k-1}^{(j+1)}(j) \text{ if } k \geq 1$$

where $f^0(x) = x, f^{(i+1)}(x) = f(f^{(i)}(x))$

$$\alpha(n) = \min \{k : A(1) \geq n\}$$

History of Bounds (early 70's)

$O(m)$ (bogus)

$O(m \log \log n)$ M. Fischer

$O(m \log^* n)$ Hopcroft and Ullman

$\Omega(n \log \log n)$ (bogus)

$\Omega(n \alpha(n))$ Tarjan

$O(m \alpha(n))$ Tarjan

$A_k(x)$ strictly increases in both k and x

$$A_1(x) = 2x + 1$$

$$A_2(x) > 2^x$$

$$A_3(x) > \left\{ \begin{array}{l} 2^{2^x} \\ x+1 \end{array} \right. \begin{array}{l} 2^x \\ 2 \end{array}$$

$\alpha(n)$ grows very slowly

Union by rank

Fix x

$r(x)$ starts at 0, increases while x is a root,

then fixed

$$r(p(x)) > r(x)$$

$r(p(x))$ only increases: $p(x)$ changes by

a compression, or $r(p(x))$ changes

by a link

$$r(x) \leq n-1 \quad (\text{actually } \leq \lg n, \text{ not used})$$

$A_k(x)$ increases in both k and x

$$A_1(x) = 2x + 1$$

$$A_2(x) > 2^x$$

$$A_3(x) > \begin{cases} 2^2 & \text{if } x=1 \\ 2^3 & \text{if } x=2 \end{cases}$$

$\alpha(n)$ grows very slowly

Union by rank

$r(x)$ starts at 0, can only increase while x a root,
constant after

$r(p(x)) > r(x)$ Once x is a nonroot, $r(p(x))$ can
only increase: $p(x)$ changes by a
compression, or $r(p(x))$ changes
by a link

$r(x) \leq n-1$ (actually $\leq \lg n$, not used in analysis)

x a non root with $r(x) \geq 1$

level of $x = k(x) = \max\{k : r(\rho(x)) \geq A_k(r(x))\}$

index of $x = i(x) = \max\{i : r(\rho(x)) \geq A_{k(x)}^{(i)}(r(x))\}$

$0 \leq k(x) < \alpha(n)$:

$$A_0(r(x)) = r(x) + 1 \leq r(\rho(x))$$

$$A_{\alpha(n)}(r(x)) \geq A_{\alpha(n)}(1) \geq n > n - 1 > r(\rho(x))$$

$1 \leq i(x) \leq r(x)$:

$$A_{k(x)}^1(r(x)) = A_{k(x)}(r(x)) < r(\rho(x)) \quad \text{dfn } k(x)$$

$$A_{k(x)}^{r(x)+1}(r(x)) = A_{k(x)+1}(r(x)) \quad \text{dfn } A$$

$$> r(\rho(x)) \quad \text{dfn } k(x)$$

$k(x)$ increases since $r(\rho(x))$ increases

$i(x)$ increases while $k(x)$ is fixed,

can decrease when $k(x)$ increases

$$\phi(x) = \begin{cases} \alpha(n)r(x) & \text{if } x \text{ a root or } r(x)=0 \\ (\alpha(n)-k(x))r(x)-i(x) & \text{otherwise} \end{cases}$$

$$\Phi = \sum_x \phi(x)$$

$0 \leq \phi(x) \leq \alpha(n)r(x)$ for all x :

true if x a root or $r(x)=0$

otherwise:

$$k(x) \leq \alpha(n)-1 \text{ and } i(x) \leq r(x)$$

$$\Rightarrow \phi(x) \geq r(x) - i(x) \geq 0$$

$$k(x) \geq 0 \text{ and } i(x) \geq 1$$

$$\Rightarrow \phi(x) \leq \alpha(n)r(x) - 1$$

Amortized time per operation is $O(\alpha(n))$:

link (x, y) with y the new root:

$$\text{actual time} = O(1)$$

$$\Delta \phi(z) = 0 \text{ if } z \neq x, z \neq y$$

$$\Delta \phi(x) \leq 0$$

$\Delta \phi(y) \leq \alpha(n)$: $r(y)$ increases by at most 1

$$\Rightarrow \text{amortized time} \leq \alpha(n) + O(1)$$

find with compression:

actual cost: #nodes on find path = l

x on find path $\Rightarrow \Delta\phi(x) \leq 0$

At least $l - (\alpha(n) + 2)$ nodes x on path

have $\Delta\phi(x) \leq -1$

\Rightarrow amortized find cost $\leq \alpha(n) + 2$

$$(= l - (l - (\alpha(n) + 2)))$$

Let x be on path with $r(x) > 0$ and some

y after x on path has $k(y) = k(x)$

(all but $\alpha(n)+2$ nodes on path:

first, last (root), last in each level)

Let $k = k(x) = k(y)$

before compress:

$$r(y) \geq r(p(x)) \geq A_k^{(i(x))}(r(x))$$

$$r(p(y)) \geq A_k(r(y)) \geq A_k(r(p(x)))$$

$$\geq A_k(A_k^{(i(x))}(r(x))) = A_k^{i(x)+1}(r(x))$$

$\Rightarrow i(x)$ or $k(x)$ increases due to compress

$\Rightarrow \phi(x)$ decreases

find with compression

actual cost: #nodes on find path = ℓ

x on path $\Rightarrow \Delta \phi(x) \leq 0$

At least $\ell - \alpha(n) + 2$ nodes x on path

have $\Delta \phi(x) \leq -1$

\Rightarrow amortized find cost $\leq \alpha(n) + 2$

Let x be on path, $r(x) > 0$, and y follows x on path

with $r(y) = r(x)$. (all but $\alpha(n) + 2$:

first, last, last in each rank)

Let $k = k(x) = k(y)$


Before compress: $r(y) \geq r(p(x)) \geq A_k^{i(x)}(r(x))$

$r(p(y)) \geq A_k^{i(x)}(r(y)) \geq A_k^{i(x)}(r(p(x)))$

$\geq A_k^{i(x)}(A_k^{i(x)}(r(x))) = A_k^{i(x)+1}(r(x))$

$\Rightarrow i(x)$ or $k(x)$ increases by compression

$\Rightarrow \phi(x)$ decreases

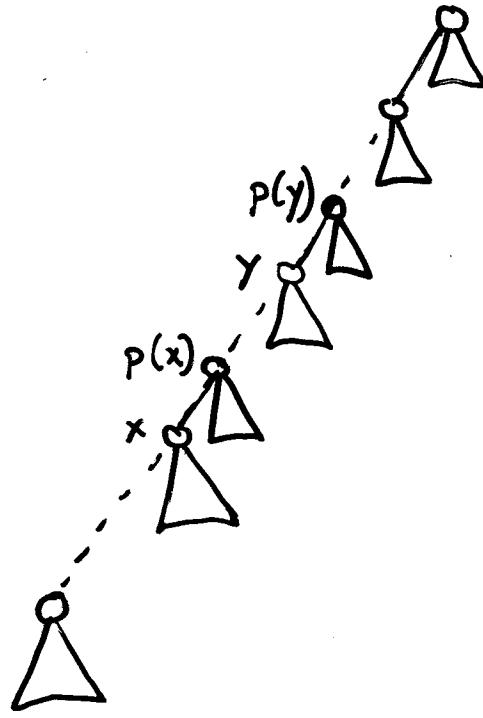

After compression, the new parent of x

(root) has rank at least $r(p(y))$