



Assemblers and Linkers

Professor Jennifer Rexford

<http://www.cs.princeton.edu/~jrex>

1


Goals for this Lecture



- Help you to learn about:
 - IA-32 machine language
 - The assembly and linking processes
- Why?
 - Machine language is the last stop on the “language levels” tour
 - A power programmer knows about the relationship between assembly language and machine language
 - A systems programmer knows how an assembler translates assembly language to machine language

2

The Build/Execute Process

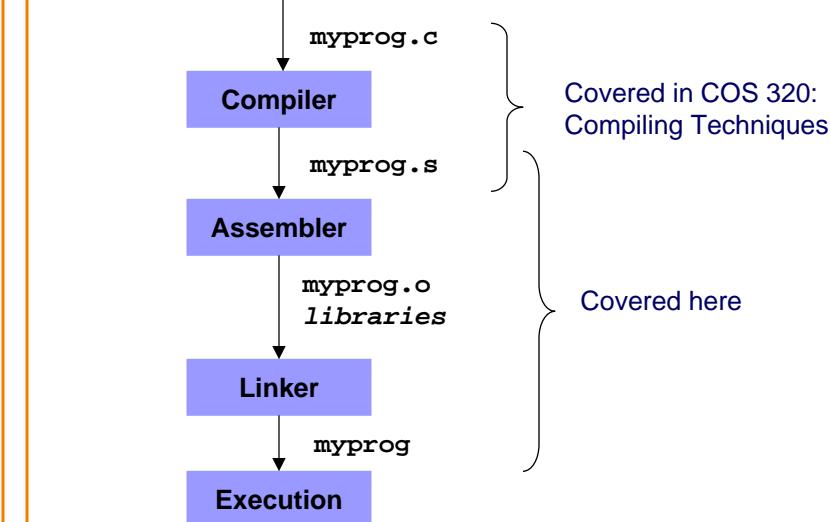

3

Two Aspects of the Assembler/Linker



- Translating each instruction
 - Mapping an assembly-language instruction
 - ... into the corresponding machine-language instruction
- Dealing with references across instructions
 - Jumps to other locations in same chunk of code
 - Accesses a global variable by the name of its memory location
 - Calling to and returning from functions defined in other code

```
main:  
    pushl  %ebp  
    movl  %esp, %ebp  
    call  getchar  
    cmpl  $'A', %eax  
    jne   skip  
    pushl  $msg  
    call  printf  
    addl  $4, %esp  
  
skip:  
    movl  $0, %eax  
    movl  %ebp, %esp  
    popl  %ebp  
    ret
```

4


Translating Each Instruction



- IA-32 machine language
 - Difficult to generalize about IA-32 instruction format
 - Many (most!) instructions are exceptions to the rules
 - Generally, instructions use the following format...
 - We'll go over
 - The format of instructions
 - Two example instructions
 - Just to give a sense of how it works...

5

IA-32 Instruction Format

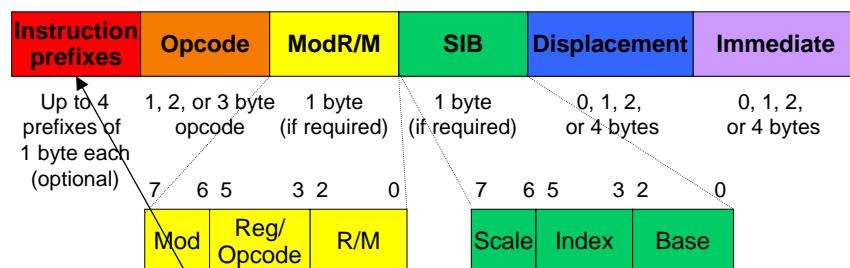


Instruction prefix

- Sometimes a repeat count
- Rarely used; don't be concerned

6

IA-32 Instruction Format (cont.)

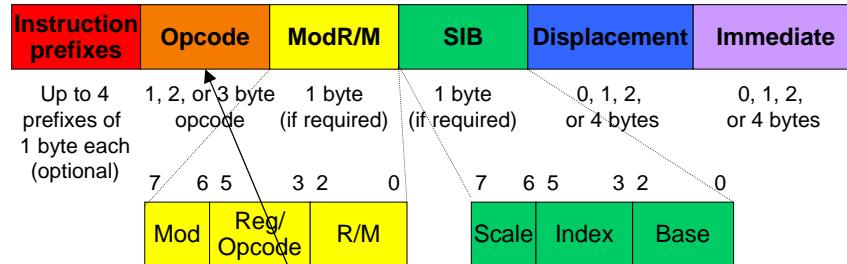


Opcode

- Specifies which operation should be performed
- Add, move, call, etc.

7

IA-32 Instruction Format (cont.)

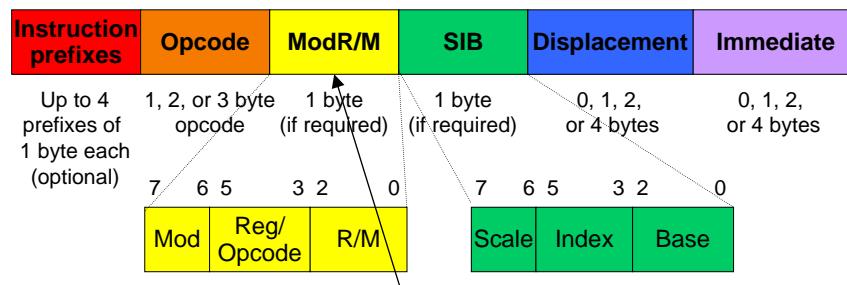


ModR/M

- Specifies types of operands (immediate, register, memory)
- Specifies sizes of operands (byte, word, long)
- Sometimes denotes a register:
 000 = EAX/AL; 011 = EBX/BL; 001 = ECX/CL; 010 = EDX/DL;
 110 = ESI/DH; 111 = EDI/BH; 101 = EBP/CH; 110 = ESP/AH
- Sometimes contains an extension of the opcode

8

IA-32 Instruction Format (cont.)

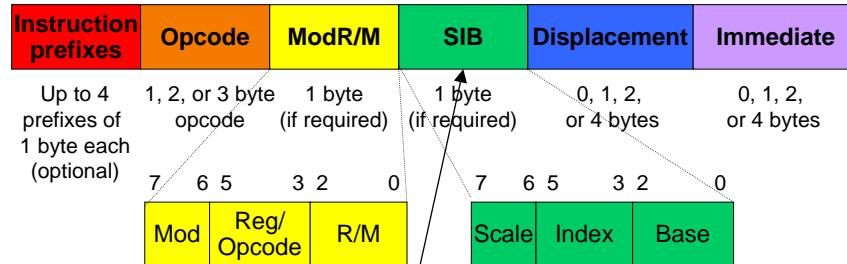


SIB

- Used when one of the operands is a memory operand that uses a **scale**, an **index register**, and/or a **base register**

9

IA-32 Instruction Format (cont.)

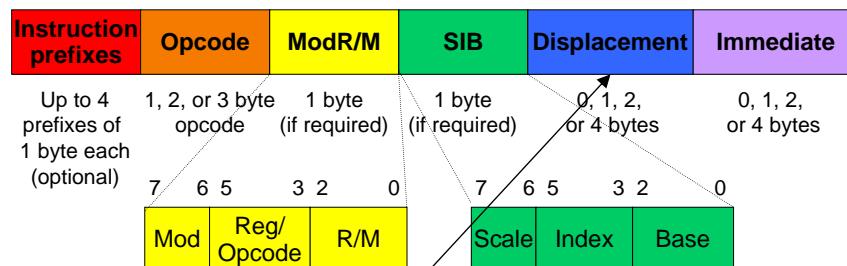


Displacement

- Used in jump and call instructions
- Indicates the displacement between the destination instruction and the jump/call instruction
- More precisely, indicates:
[addr of destination instr] – [addr of instr following the jump/call]
- Uses little-endian byte order

10

IA-32 Instruction Format (cont.)

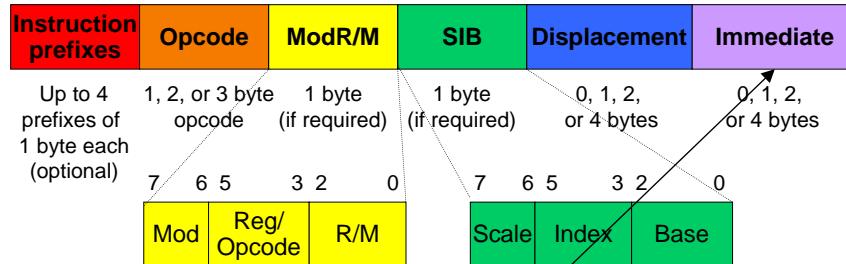

Immediate

- Specifies an immediate operand
- Uses little-endian byte order

11

Example: Push on to Stack



- Assembly language:

`pushl %edx`

- Machine code:

- IA32 has a separate opcode for push for each register operand
 - 50: `pushl %eax`
 - 51: `pushl %ecx`
 - 52: `pushl %edx` → 0101 0010
 - ...

- Results in a *one-byte* instruction

- Observe: sometimes one assembly language instruction can map to a *group* of different opcodes

12

Example: Load Effective Address



- Assembly language:

```
leal (%eax,%eax,4), %eax
```

- Machine code:

- Byte 1: 8D (opcode for “load effective address”)
- Byte 2: 04 (dest %eax, with scale-index-base)
- Byte 3: 80 (scale=4, index=%eax, base=%eax)

1000 1101
0000 0100
1000 0000

Load the address %eax + 4 * %eax into register %eax

13

References Across Instructions



- Many instructions can be assembled independently
 - pushl %edx
 - leal (%eax, %eax, 4), %eax
 - movl \$0, %eax
 - addl %ebx, %ecx
- But, some make references to other data or code
 - jne skip
 - pushl \$msg
 - call printf
- Need to fill in those references
 - To generate a final executable binary

14

The Forward Reference Problem



- Problem

```
...  
jmp mylabel  
...  
mylabel:  
...
```

Any assembler must
deal with the
forward reference
problem

- Assembler must generate machine language code for “jmp mylabel”
- But assembler hasn’t yet *seen* the definition of mylabel
 - I.e., the jmp instruction contains a **forward reference** to mylabel

15

The Forward Reference Solution



- Solution

- Assembler performs **2 passes** over assembly language program

- Different assemblers perform different tasks in each pass

- One straightforward design...

16

Assembler Passes



- **Pass 1**

- Assembler traverses assembly program to create...
- **Symbol table**
 - Key: label
 - Value: information about label
 - Label name, which section, what offset within that section, ...

- **Pass 2**

- Assembler traverses assembly program again to create...
- **RODATA section**
- **DATA section**
- **BSS section**
- **TEXT section**
- **Relocation record section**
 - Each relocation record indicates an area that the linker must patch

17

An Example Program



- A simple (nonsensical) program:

```
#include <stdio.h>
int main(void) {
    if (getchar() == 'A')
        printf("Hi\n");
    return 0;
}
```

- Let's consider how the assembler handles that program...

```
.section ".rodata"
msg: .asciz "Hi\n"
.section ".text"
.globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp

skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

18

Assembler Data Structures (1)



- Symbol Table

Label	Section	Offset	Local?	Seq#

- Relocation Records

Section	Offset	Rel Type	Seq#

- RODATA Section (location counter: 0)

Offset	Contents	Explanation

- No DATA or BSS section in this program
- Initially all sections are empty

- TEXT Section (location counter: 0)

Offset	Contents	Explanation

19

Assembler Pass 1



```
msg:    .section ".rodata"
        .asciz "Hi\n"
        .section ".text"
        .globl main

main:
        pushl %ebp
        movl %esp, %ebp
        call getchar
        cmpl $'A', %eax
        jne skip
        pushl $msg
        call printf
        addl $4, %esp

skip:
        movl $0, %eax
        movl %ebp, %esp
        popl %ebp
        ret
```

Assembler notes that the current section is RODATA

Assembler adds binding to Symbol Table...

20

Assembler Data Structures (2)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0

- msg marks a spot in the RODATA section at offset 0
- msg is a local label
- Assign msg sequence number 0

- Relocation Records
 - (Same)
- RODATA Section (location counter: 0)
 - (Same)
- TEXT Section (location counter: 0)
 - (Same)

21

Assembler Pass 1 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
    .section ".text"
    .globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp

skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler increments
RODATA section
location counter by
byte count of the
string (4)...

22

Assembler Data Structures (3)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0

- Relocation Records
 - (Same)

- RODATA Section (location counter: 4)

- (Same)

- TEXT Section (location counter: 0)

- (Same)

- RODATA location counter now is 4
- If another label were defined in at this point, it would mark a spot in RODATA at offset 4

23

Assembler Pass 1 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main
main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp
skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler notes that current section is TEXT

Assembler does nothing

Assembler adds binding to Symbol Table...

24

Assembler Data Structures (4)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0
main	TEXT	0	local	1

- main marks a spot in the TEXT section at offset 0
- main is a local label (assembler will discover otherwise in Pass 2)
- Assign main sequence number 1

- Relocation Records

- (Same)

- RODATA Section (location counter: 4)

- (Same)

- TEXT Section (location counter: 0)

- (Same)

25

Assembler Pass 1 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp

skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler increments
TEXT section location
counter by the length
of each instruction...

26

Assembler Data Structures (5)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0
main	TEXT	0	local	1

- Relocation Records
 - (Same)

- RODATA Section (location counter: 4)
 - (Same)

- TEXT Section (location counter: 26)
 - (Same)

- TEXT location counter now is 26
- If another label were defined at this point, it would mark a spot in TEXT at offset 26

27

Assembler Pass 1 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp

skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler adds binding to Symbol Table...

28

Assembler Data Structures (6)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0
main	TEXT	0	local	1
skip	TEXT	26	local	2

- skip marks a spot in the TEXT section at offset 26
- skip is a local label
- Assign skip sequence number 2

- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 26)
 - (Same)

29

Assembler Pass 1 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp

skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler increments
TEXT section location
counter by the length
of each instruction...

30

Assembler Data Structures (7)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0
main	TEXT	0	local	1
skip	TEXT	26	local	2

- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 35)
 - (Same)

- TEXT location counter now is 35
- If another label were defined at this point, it would mark a spot in TEXT at offset 35

31

From Assembler Pass 1 to Pass 2



- End of Pass 1
 - Assembler has (partially) created Symbol Table
 - So assembler now knows which location each label marks
- Beginning of Pass 2
 - Assembler resets all section location counters...

32

Assembler Data Structures (8)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0
main	TEXT	0	local	1
skip	TEXT	26	local	2

- Relocation Records
 - (Same)

- RODATA Section (location counter 0)
 - (Same)

- TEXT Section (location counter 0)
 - (Same)

• Location counters
reset to 0

33

Assembler Pass 2



```
msg:    .section ".rodata"
        .asciz "Hi\n"
        .section ".text"
        .globl main

main:
        pushl %ebp
        movl %esp, %ebp
        call getchar
        cmpl $'A', %eax
        jne skip
        pushl $msg
        call printf
        addl $4, %esp

skip:
        movl $0, %eax
        movl %ebp, %esp
        popl %ebp
        ret
```

Assembler notes that
the current section is
RODATA

Assembler does nothing

Assembler places
bytes in RODATA
section, and increments
location counter...

34

Assembler Data Structures (9)



- Symbol Table
 - (Same)
- Relocation Records
 - (Same)
- RODATA Section (location counter 4)
 - Location counter incremented to 4

Offset	Contents (hex)	Explanation
0	48	ASCII code for 'H'
1	69	ASCII code for 'i'
2	0A	ASCII code for '\n'
3	00	ASCII code for null char

- TEXT Section (location counter: 0)
 - (Same)

- RODATA section contains the bytes comprising the string

35

Assembler Pass 2 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
    .section ".text"
    .globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp

skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler notes that the current section is TEXT

Assembler updates Symbol Table...

36

Assembler Data Structures (10)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0
main	TEXT	0	global	1
skip	TEXT	26	local	2

• main is a global label

- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 0)
 - (Same)

37

Assembler Pass 2 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main
main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp
skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler does nothing

Assembler generates machine language code in current (TEXT) section...

38

Assembler Data Structures (11)



- Symbol Table
 - (Same)
- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 1)

Offset	Contents	Explanation
0	55	pushl %ebp 01010101 This is a "pushl %ebp" instruction

39

Assembler Pass 2 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp

skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler generates machine language code in current (TEXT) section...

40

Assembler Data Structures (12)



- Symbol Table
 - (Same)
- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 3)

Offset	Contents	Explanation
...
1-2	89 E5	<pre>movl %esp,%ebp 10001001 11 100 101</pre> <p>This is a "movl" instruction whose source operand is a register</p> <p>The M field designates a register The source register is ESP The destination register is EBP</p>

41

Assembler Pass 2 (cont.)



```
.section ".rodata"  
msg:  
.asciz "Hi\n"  
.section ".text"  
.globl main  
  
main:  
    pushl %ebp  
    movl %esp, %ebp  
    call getchar  
    cmpl $'A', %eax  
    jne skip  
    pushl $msg  
    call printf  
    addl $4, %esp  
  
skip:  
    movl $0, %eax  
    movl %ebp, %esp  
    popl %ebp  
    ret
```

Assembler generates machine language code in current (TEXT) section...

42

Assembler Data Structures (12)



- Symbol Table
 - (Same)
- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 8)

- Assembler looks in Symbol Table to find offset of getchar
- getchar is not in Symbol Table
- Assembler cannot compute displacement that belongs at offset 4
- So...

Offset	Contents	Explanation
...
3-7	E8 ????????	<p>call getchar 11101000 ??????????????????????????????????????</p> <p>This is a "call" instruction with a 4-byte immediate operand</p> <p style="text-align: right;">This is the displacement</p>

43

Assembler Data Structures (13)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0
main	TEXT	0	global	1
skip	TEXT	26	local	2
getchar	?	?	global	3

- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 8)
 - (Same)

- Assembler adds getchar to Symbol Table
- Then...

44

Assembler Data Structures (14)



- Symbol Table
 - (Same)
- Relocation Records

Section	Offset	Rel Type	Seq#
TEXT	4	displacement	3

- Assembler generates a relocation record, thus asking linker to patch code

- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 8)
 - (Same)

*Dear Linker,
Please patch the TEXT section at offset 4. Do a "displacement" type of patch. The patch is with respect to the label whose seq number is 3 (i.e. getchar).
Sincerely,
Assembler*

45

Assembler Pass 2 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp

skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler generates machine language code in current (TEXT) section...

46

Assembler Data Structures (15)



- Symbol Table
 - (Same)
- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 11)

Offset	Contents	Explanation
...
8-10	83 F8 41	<code>cmpl %'A',%eax</code> 10000011 11 111 000 01000001 This is some "l" instruction that has a 1 byte immediate operand The M field designates a register This is a "cmp" instruction The destination register is EAX The immediate operand is 'A' 47

Assembler Pass 2 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main
main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp
skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler generates machine language code in current (TEXT) section...

48

Assembler Data Structures (16)



- Symbol Table
 - (Same)
- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 13)

- Assembler looks in Symbol Table to find offset of skip (26)
- Assembler subtracts offset of next instruction (13)
- Resulting displacement is 13

Offset	Contents	Explanation
...
11-12	75 0D	jne skip 01110101 00001101 This is a jne instruction that has a 1 byte immediate operand The displacement between the destination instr. and the next instr. is 13

49

Assembler Pass 2 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main
main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl$msg
    call printf
    addl $4, %esp
skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler generates machine language code in current (TEXT) section...

50

Assembler Data Structures (16)



- Symbol Table
 - (Same)
- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 18)

- Assembler knows offset of msg (0) within RODATA section
- But assembler does not know location RODATA section
- So assembler does not know location of msg
- So...

Offset	Contents	Explanation
...
13-17	68 ????????	<p>pushl \$msg 001101000 ??</p> <p>This is a pushl instruction with a 4 byte immediate operand</p> <p>This is the data to be pushed</p>

51

Assembler Data Structures (17)



- Symbol Table
 - (Same)
- Relocation Records

Section	Offset	Rel Type	Seq#
...
TEXT	14	absolute	0

- Assembler generates a relocation record, thus asking linker to patch code

- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 18)
 - (Same)

Dear Linker,
Please patch the TEXT section at offset 14. Do an "absolute" type of patch. The patch is with respect to the label whose seq number is 0 (i.e. msg).
Sincerely,
Assembler

52

Assembler Pass 2 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
    .section ".text"
    .globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp

skip:
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

Assembler generates machine language code in current (TEXT) section...

53

Assembler Data Structures (18)



- Symbol Table
 - (Same)
- Relocation Records
 - (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 23)

- Assembler looks in Symbol Table to find offset of printf
- printf is not in Symbol Table
- Assembler cannot compute displacement that belongs at offset 19
- So...

Offset	Contents	Explanation
...
18-22	E8 ????????	call printf 11101000 ?????????????????????????????? This is a "call" instruction with a 4-byte immediate operand This is the displacement

54

Assembler Data Structures (19)



- Symbol Table

Label	Section	Offset	Local?	Seq#
msg	RODATA	0	local	0
main	TEXT	0	global	1
skip	TEXT	26	local	2
getchar	?	?	global	3
printf	?	?	global	4

- Relocation Records

- (Same)
- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 23)
 - (Same)

- Assembler adds printf to Symbol Table
- Then...

55

Assembler Data Structures (20)



- Symbol Table

- (Same)

- Relocation Records

Section	Offset	Rel Type	Seq#
...
TEXT	19	displacement	4

- Assembler generates a relocation record, thus asking linker to patch code

- RODATA Section (location counter: 4)
 - (Same)
- TEXT Section (location counter: 8)
 - (Same)

Dear Linker,
 Please patch the TEXT section at offset 19. Do a "displacement" type of patch. The patch is with respect to the label whose seq number is 4 (i.e. printf).
 Sincerely,
 Assembler

56

Assembler Pass 2 (cont.)



```
.section ".rodata"
msg:
    .asciz "Hi\n"
.section ".text"
.globl main

main:
    pushl %ebp
    movl %esp, %ebp
    call getchar
    cmpl $'A', %eax
    jne skip
    pushl $msg
    call printf
    addl $4, %esp
    movl $0, %eax
    movl %ebp, %esp
    popl %ebp
    ret
```

skip:

Assembler ignores

Assembler generates
machine language
code in current
(TEXT) section...

57

Assembler Data Structures (21)



- Symbol Table, Relocation Records, RODATA Section
 - (Same)
- TEXT Section (location counter: 31)

Offset	Contents	Explanation
...
23-25	83 C4 04	addl \$4,%esp 10000011 11 000 100 00000100 This is some "l" instruction that has a 1 byte immediate operand The M field designates a register This is an "add" instruction The destination register is ESP The immediate operand is 4
26-30	B8 00000000	movl \$0,%eax 10111000 00000000000000000000000000000000 This is an instruction of the form "movl 4-byte- immediate, %eax" The immediate operand is 0

58

Assembler Data Structures (22)



- Symbol Table, Relocation Records, RODATA Section
 - (Same)
- TEXT Section (location counter: 35)

Offset	Contents	Explanation
...
31-32	89 EC	<code>movl %ebp,%esp</code> 10001001 11 101 100 This is a "movl" instruction whose source operand is a register The M field designates a register The source register is EBP The destination register is ESP
33	5D	<code>popl %ebp</code> 01011101 This is a "popl %ebp" instruction
34	C3	<code>ret</code> 11000011 This is a "ret" instruction

59

From Assembler to Linker



- Assembler writes its data structures to .o file
- Linker:
 - Reads .o file
 - Works in two phases: **resolution** and **relocation**

60



Linker Resolution

- Resolution
 - Linker resolves references
- For this program, linker:
 - Notes that Symbol Table contains undefined labels
 - getchar and printf
 - Fetches, from libc.a, machine language code defining getchar and printf
 - Adds that code to TEXT section
 - (May add code to other sections too)
 - Updates Symbol Table to note offsets of getchar and printf
 - Adds column to Symbol Table to note addresses of all labels

61



Linker Relocation

- Relocation
 - Linker patches (“relocates”) code
 - Linker traverses relocation records, patching code as specified
- For this program

Section	Offset	Rel Type	Seq#
TEXT	4	displacement	3
TEXT	14	absolute	0
TEXT	19	displacement	4

- Linker looks up offset of getchar
- Linker computes:
[offset of getchar] – 8
- Linker places difference in TEXT section at offset 4

62

Linker Relocation (cont.)



- For this program

Section	Offset	Rel Type	Seq#
TEXT	4	displacement	3
TEXT	14	absolute	0
TEXT	19	displacement	4

- Linker looks up addr of msg
- Linker places addr in TEXT section at offset 14

63

Linker Relocation (cont.)



- For this program

Section	Offset	Rel Type	Seq#
TEXT	4	displacement	3
TEXT	14	absolute	0
TEXT	19	displacement	4

- Linker looks up offset of printf
- Linker computes:
[offset of printf] – 23
- Linker places difference in TEXT section at offset 19

64

Linker Finishes




- Linker writes resulting TEXT, RODATA, DATA, BSS sections to executable binary file

65

ELF: Executable and Linking Format



- Unix format of object and executable files
 - Output by the assembler
 - Input and output of linker

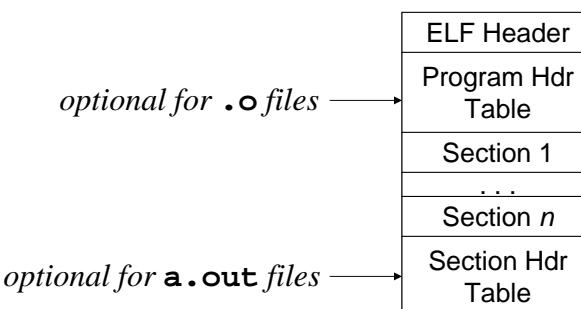

66

Conclusions



- **Assembler:** reads assembly language file
 - Pass 1: Generates Symbol Table
 - Contains info about labels
 - Pass 2: Uses Symbol Table to generate code
 - TEXT, RODATA, DATA, BSS sections
 - Relocation Records
 - Writes object file (ELF)
- **Linker:** reads object files
 - **Resolution:** Resolves references to make Symbol Table complete
 - **Relocation:** Uses Symbol Table and Relocation Records to patch code
 - Writes executable binary file (ELF)

67

Appendix: Generating Machine Lang



- Hint for Buffer Overrun assignment...
- Given an assembly language instruction, how can you find the machine language equivalent?
- **Option 1: Consult IA-32 reference manuals**
 - See course Web pages for links to the manuals

68

Appendix: Generating Machine Lang



- Option 2:

- Compose an assembly language program that contains the given assembly language instruction
- Then use gdb...

69

Appendix: Generating Machine Lang



- Using gdb

```
$ gcc217 detecta.s -o detecta
$ gdb detecta
(gdb) x/12i main
0x80483b4 <main>:    push  %ebp
0x80483b5 <main+1>:   mov   %esp,%ebp
0x80483b7 <main+3>:   call  0x8048298 <getchar@plt>
0x80483bc <main+8>:   cmp   $0x41,%eax
0x80483bf <main+11>:  jne   0x80483ce <skip>
0x80483c1 <main+13>:  push  $0x80484b0
0x80483c6 <main+18>:  call  0x80482c8 <printf@plt>
0x80483cb <main+23>:  add   $0x4,%esp
0x80483ce <skip>:     mov   $0x0,%eax
0x80483d3 <skip+5>:   mov   %ebp,%esp
0x80483d5 <skip+7>:   pop   %ebp
0x80483d6 <skip+8>:   ret
(gdb) x/35b main
0x0 <main>: 0x55 0x89 0xe5 0xe8 0xfc 0xff 0xff 0xff
0x8 <main+8>: 0x83 0xf8 0x41 0x75 0xd 0x68 0x00 0x00
0x10 <main+16>: 0x00 0x00 0xe8 0xfc 0xff 0xff 0x83 0x83
0x18 <main+24>: 0xc4 0x04 0xb8 0x00 0x00 0x00 0x00 0x89
0x20 <skip+6>: 0xec 0x5d 0xc3
(gdb) quit
```

Build program; run gdb from shell

Issue x/i command to examine memory as instructions

Issue x/b command to examine memory as raw bytes

Match instructions to bytes

Appendix: Generating Machine Lang



- Option 3:

- Compose an assembly language program that contains the given assembly language instruction
- Then use objdump – a special purpose tool...

71

Appendix: Generating Machine Lang



- Using objdump

```
$ gcc217 detecta.s -o detecta
$ objdump -d detecta
detecta:   file format elf32-i386
...
Disassembly of section .text:
...
080483b4 <main>:
080483b4: 55
080483b5: 89 e5
080483b7: e8 dc fe ff ff
080483bc: 83 f8 41
080483bf: 75 0d
080483c1: 68 b0 84 04 08
080483c6: e8 fd fe ff ff
080483cb: 83 c4 04

080483ce <skip>:
080483ce: b8 00 00 00 00
080483d3: 89 ec
080483d5: 5d
080483d6: c3
...
```

Build program; run objdump

Machine language

Assembly language