

Network Programming (Part 2)

Copyright © 2026 by
Robert M. Dondero, Ph.D.
Princeton University

Objectives

- We will cover:
 - Communication using char sequences
 - Communication using JSON docs
 - Communication using pickled Python objects

Agenda

- **Running example**
- Communication using char sequences
- JSON
- Communication using JSON
- Improper communication using JSON
- Communication using pickled Python objects


Running Example

Example: Courses and Books

```
book0 = {'title': 'C Programming', 'price': 88.55}
book1 = {'title': 'The Practice of Programming', 'price': 35.14}
course0 = {'name': 'COS 217', 'book': book0}
course1 = {'name': 'COS 333', 'book': book1}
courses = [course0, course1]
```

Running Example


Example (cont.):

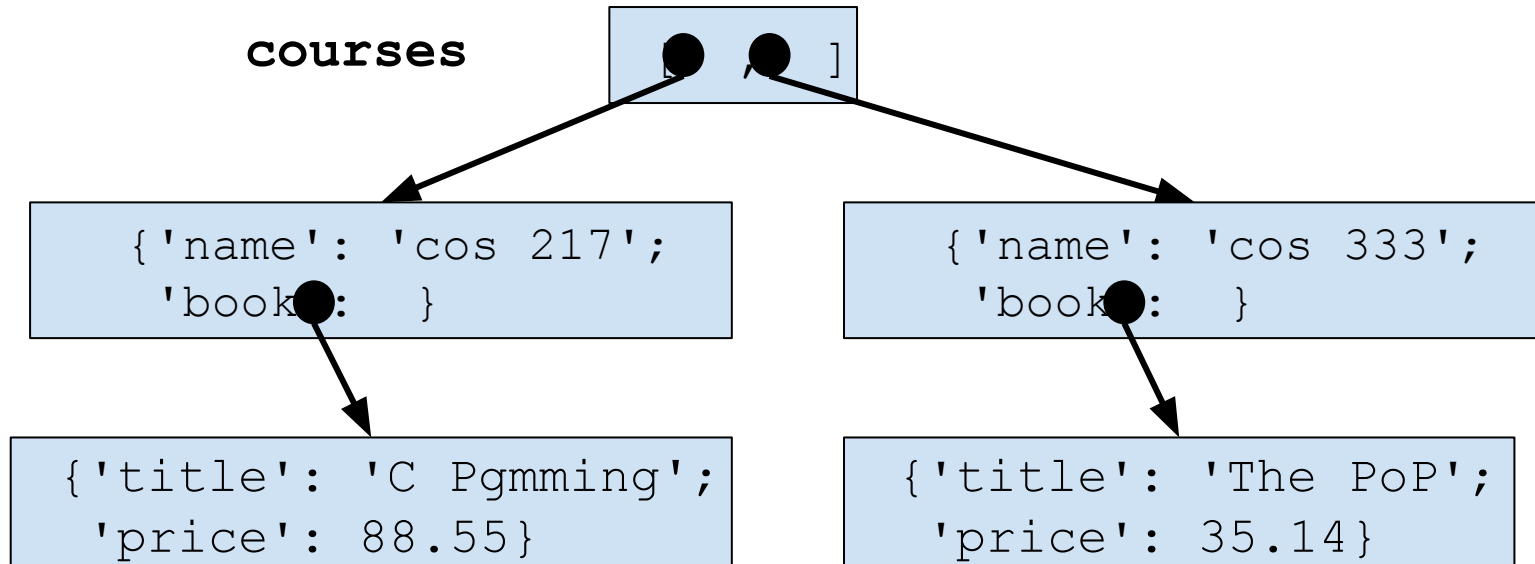


Running Example

Example (cont.):

Client

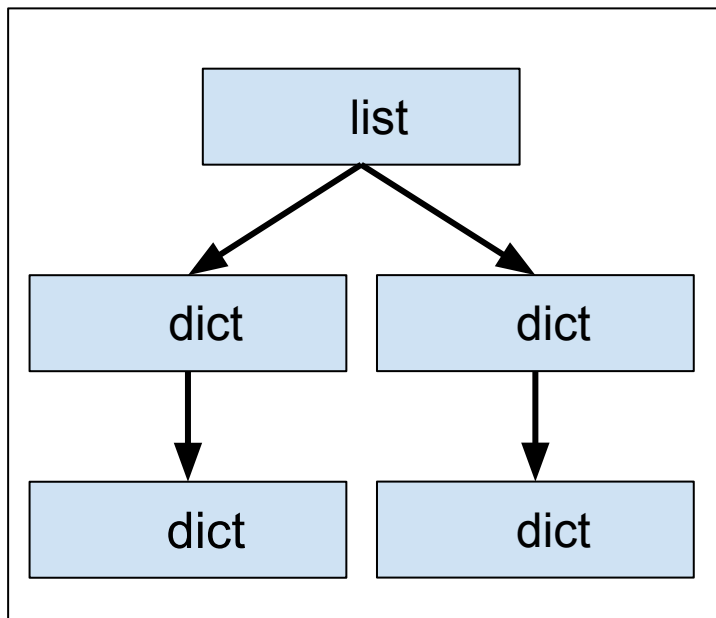

Server

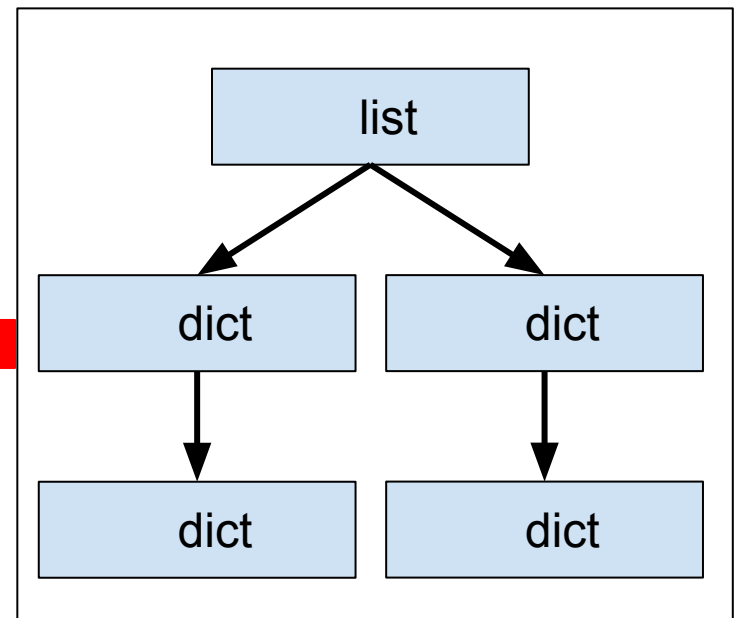

Agenda

- Running example
- **Communication using char sequences**
- JSON
- Communication using JSON
- Improper communication using JSON
- Communication using pickled Python objects

Comm Using Char Sequences

- See **commchars** app

Server: On host 192.168.1.8

```
$ python server.py 55555 (1)
Opened server socket      (1)
Accepted connection      (3)
Wrote to client          (3)
```

Client

```
$ python client.py 192.168.1.8 55555 (2)
COS 217                               (4)
C Programming, 88.55                  (4)
                                     (4)
COS 333                               (4)
The Practice of Programming, 35.14    (4)
                                     (4)
$
```

Comm Using Char Sequences

- See **commchars** app (cont.)
 - **client.py**
 - **server.py**

Agenda

- Running example
- Communication using char sequences
- **JSON**
- Communication using JSON
- Improper communication using JSON
- Communication using pickled Python objects

JSON

- ***JavaScript Object Notation (JSON)***
 - A ***JSON document*** is a char sequence representation of a **JavaScript** data structure
 - JavaScript data structure can consist of:
 - Strings, Numbers, Booleans, or null
 - Objects or arrays having properties that are Strings, Numbers, Booleans, objects, arrays, or null

Unavoidable forward
reference to JavaScript

JSON

- **Observation**

- A char sequence rep of a **JavaScript** data structure is similar to a char sequence rep of a **Python** data structure
- So...

JSON

- ***JavaScript Object Notation (JSON)***
 - A ***JSON document*** is (more or less) a char sequence representation of a **Python** data structure
 - Python data structure can consist of:
 - `str`, `int`, `float`, or `bool` objects, or `None`
 - `list` objects having elements that are `str`, `int`, `float`, `bool`, `list`, or `dict` objects, or `None`
 - `dict` objects having keys and values that are `str`, `int`, `float`, `bool`, `list`, or `dict` objects, or `None`

JSON

- `json_doc = json.dumps(obj)`
 - Converts Python object to JSON doc
- `obj = json.loads(json_doc)`
 - Converts JSON doc to Python object

JSON

```
$ python
Python 3.12.4 (main, Jun 8 2024, 18:29:57) [GCC 9.4.0] on linux
Type "help", "copyright", "credits" or "license" for more
information.
>>> import json
>>> somelist1 = ['Ruth', 'Gehrig']
>>> somelist1
['Ruth', 'Gehrig']
>>> jsondoc = json.dumps(somelist1)
>>> jsondoc
'["Ruth", "Gehrig"]'
>>> somelist2 = json.loads(jsondoc)
>>> somelist2
['Ruth', 'Gehrig']
>>>
```

Python
object of
class list

Python
object of
class str

Python
object of
class list

JSON

```
$ python
Python 3.12.4 (main, Jun 8 2024, 18:29:57) [GCC 9.4.0] on linux
Type "help", "copyright", "credits" or "license" for more
information.
>>> import json
>>> somedict1 = {'Ruth': 3, 'Gehrig': 4}
>>> somedict1
{'Ruth': 3, 'Gehrig': 4}
>>> jsondoc = json.dumps(somedict1)
>>> jsondoc
'{"Ruth": 3, "Gehrig": 4}'
>>> somedict2 = json.loads(jsondoc)
>>> somedict2
{'Ruth': 3, 'Gehrig': 4}
>>>
```

Python
object of
class dict

Python
object of
class str

Python
object of
class dict

JSON

```
$ python
Python 3.12.3 (main, Sep 11 2024, 14:17:37) [GCC 13.2.0] on linux
Type "help", "copyright", "credits" or "license" for more information.
>>> book0 = {'title': 'C Programming', 'price': 88.55}
>>> book1 = {'title': 'The Practice of Programming', 'price': 35.14}
>>> course0 = {'name': 'COS 217', 'book': book0}
>>> course1 = {'name': 'COS 333', 'book': book1}
>>> courses = [course0, course1]
>>> courses
[{'name': 'COS 217', 'book': {'title': 'C Programming', 'price': 88.55}},
{'name': 'COS 333', 'book': {'title': 'The Practice of Programming', 'price':
35.14}}]
>>> import json
>>> jsondoc = json.dumps(courses)
>>> jsondoc
'[{"name": "COS 217", "book": {"title": "C Programming", "price": 88.55}},
{"name": "COS 333", "book": {"title": "The Practice of Programming", "price":
35.14}}]'
>>> courses2 = json.loads(jsondoc)
>>> courses2
[{'name': 'COS 217', 'book': {'title': 'C Programming', 'price': 88.55}},
{'name': 'COS 333', 'book': {'title': 'The Practice of Programming', 'price':
35.14}}]
>>>
```

Python
object of
class list

Python
object of
class str

Python
object of
class list

Agenda

- Running example
- Communication using char sequences
- JSON
- **Communication using JSON**
- Improper communication using JSON
- Communication using pickled Python objects

Comm Using JSON

- See **commjson** app

Server: On host 192.168.1.8

```
$ python server.py 55555 (1)
Opened server socket      (1)
Accepted connection      (3)
Wrote to client          (3)
```

Client

```
$ python client.py 192.168.1.8 55555 (2)
COS 217                               (4)
C Programming, 88.55                  (4)
                                       (4)
COS 333                               (4)
The Practice of Programming, 35.14    (4)
                                       (4)
$
```

Comm Using JSON

- See **commjson** app (cont.)
 - **client.py**
 - **server.py**

Comm Using JSON

Client (given)

```
...  
json_str = flo.readline()  
json_str = json_str.rstrip()  
...
```

Client (alternative)

```
...  
json_str = flo.read()  
...
```

Server (given)

```
...  
flo.write(json_str + '\n')  
...
```

Server (alternative)

```
...  
flo.write(json_str)  
...
```

The alternative won't work for the echo app

Agenda

- Running example
- Communication using char sequences
- JSON
- Communication using JSON
- **Improper communication using JSON**
- Communication using pickled Python objects


Communicating JSON

Previously:

```
book0 = {'title': 'C Programming', 'price': 88.55}
book1 = {'title': 'The Practice of Programming', 'price': 35.14}
course0 = {'name': 'COS 217', 'book': book0}
course1 = {'name': 'COS 333', 'book': book1}
courses = [course0, course1]
```

Improper Comm Using JSON


Previously:

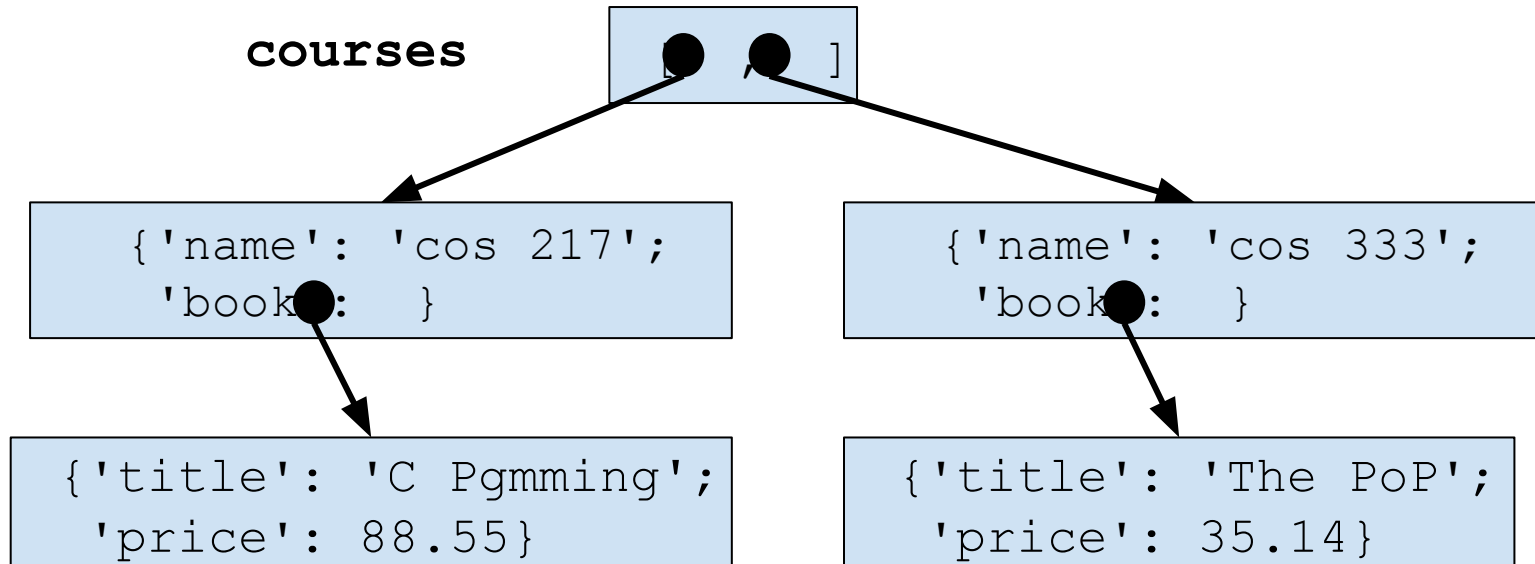


Improper Comm Using JSON

Previously:

Client

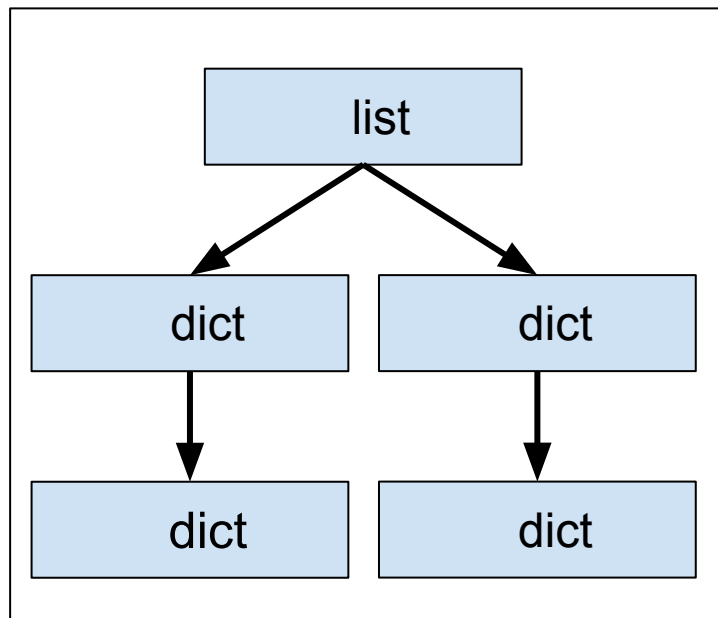

Server

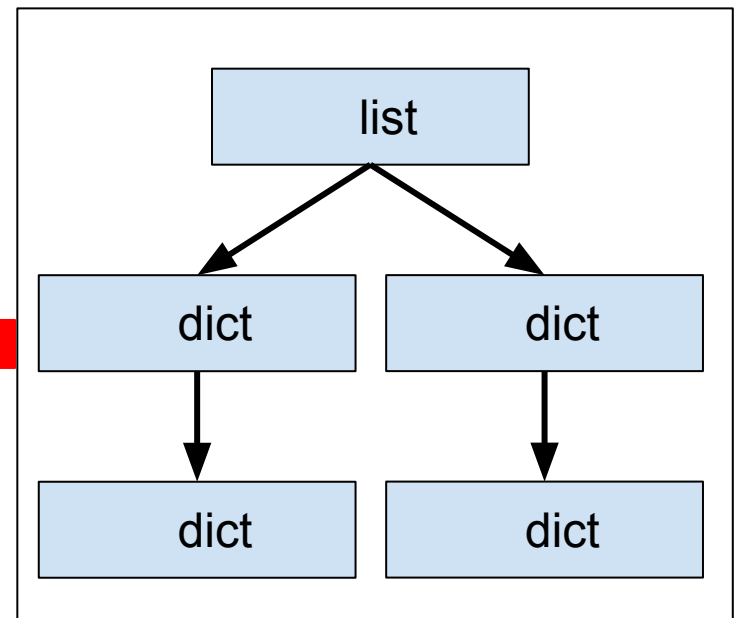


Improper Comm Using JSON

Now:

```
book0 = {'title': 'C Programming', 'price': 88.55}  
book1 = {'title': 'The Practice of Programming', 'price': 35.14}  
course0 = {'name': 'COS 217', 'book': book1}  
course1 = {'name': 'COS 333', 'book': book1}  
courses = [course0, course1]
```

Improper Comm Using JSON


Now:

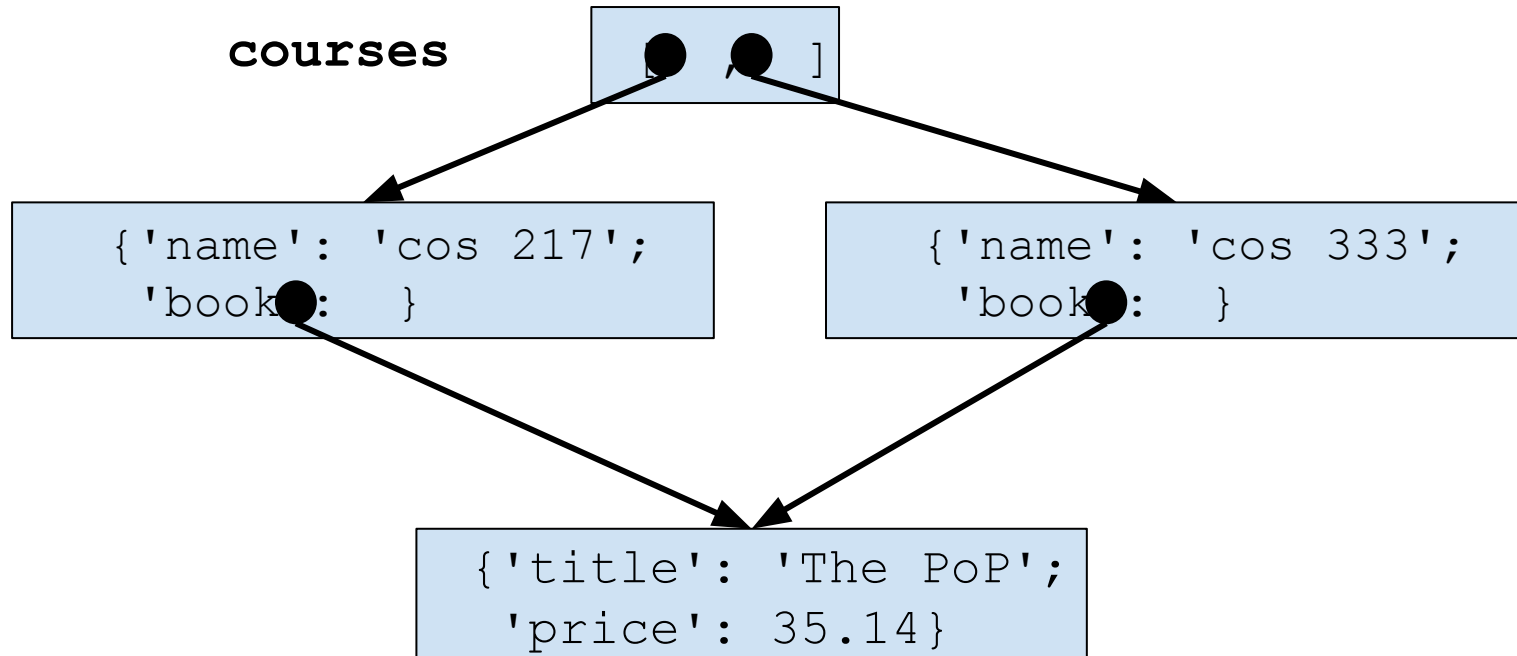


Improper Comm Using JSON

Example (cont.):

Client

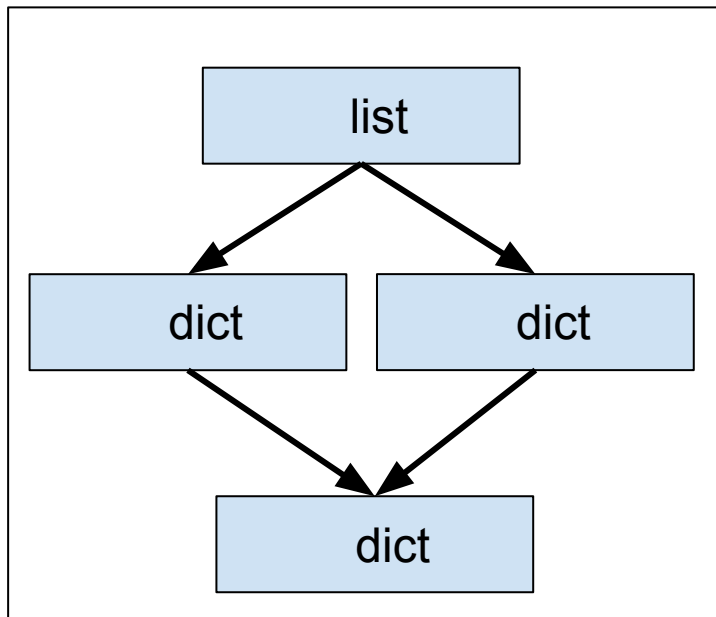

Server

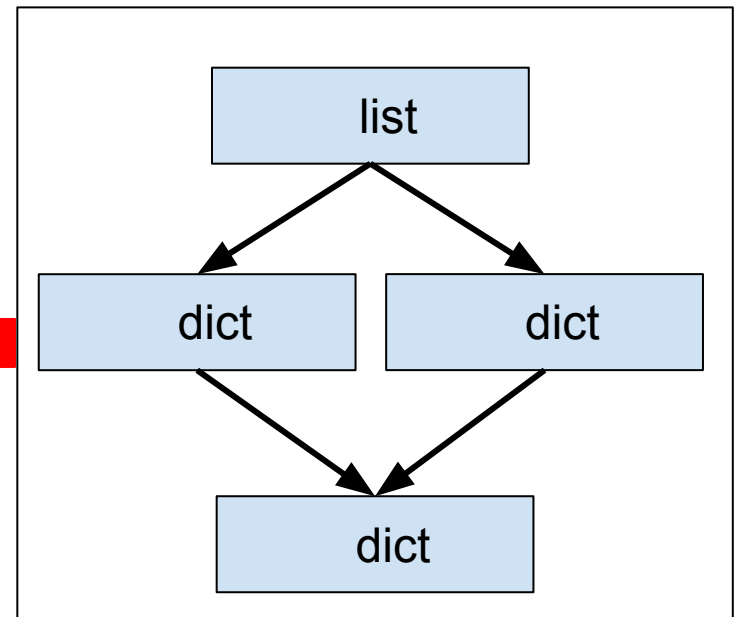

Improper Comm Using JSON

- See **commjsonbad** app
 - **client.py**
 - **server.py**

Improper Comm Using JSON

JSON document that the server sends to the client:

```
[
  {
    "name": "COS 217",
    "book":
      {
        "title": "The Practice of Programming",
        "price": 35.14
      }
  },
  {
    "name": "COS 333",
    "book":
      {
        "title": "The Practice of Programming",
        "price": 35.14
      }
  }
]
```

Agenda

- Running example
- Communication using char sequences
- JSON
- Communication using JSON
- Improper communication using JSON
- **Communication using pickled Python objects**

Comm Using Pickles


- `pickle.dump(obj, flo)`
 - Serializes `obj` to byte sequence
 - Writes byte sequence to `flo`
- `obj = pickle.load(flo)`
 - Reads byte sequence from `flo`
 - Deserializes byte sequence to form `obj`

Comm Using Pickles

- See **commpickle** app (cont.)
 - **client.py**
 - **server.py**


Comm Using Pickles

In server:

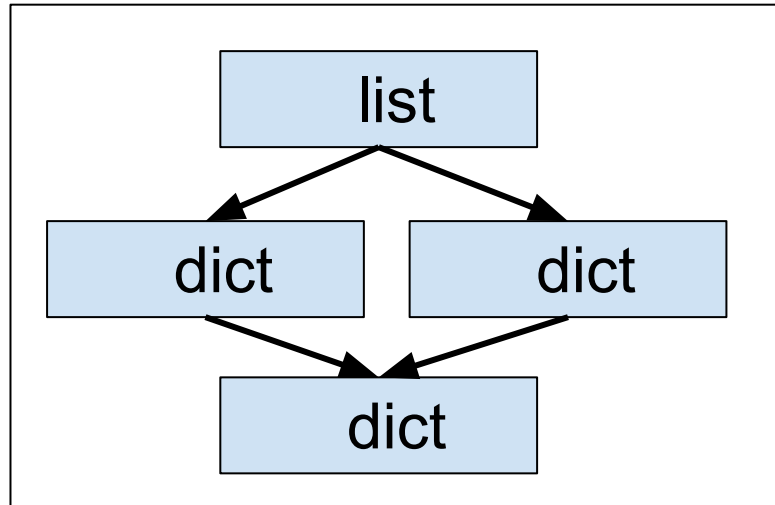

See
commpickle
app

In client:

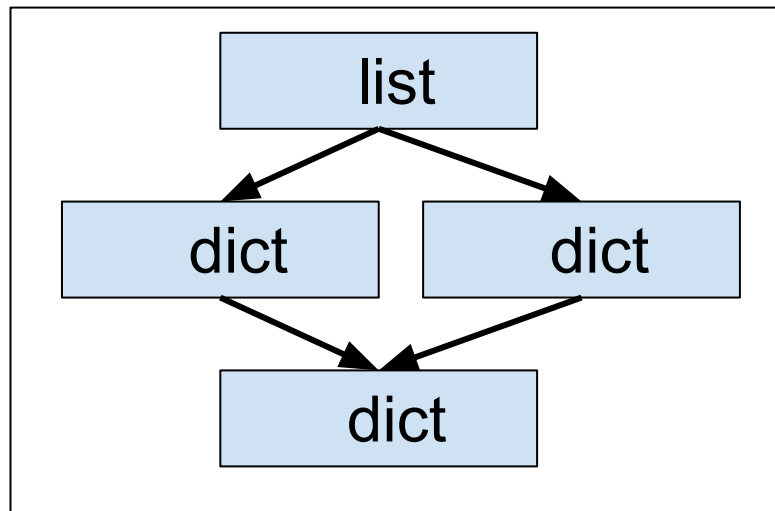

It works!

Lecture Summary

	Comm Using Chars	Comm Using JSON	Comm Using Pickles *
Convenience	-	+	+
Programming language independence	+	+	-
Handling of object graphs	-	-	+

* Java has a similar mechanism: `Serializable` interface

Lecture Series Summary

- In this lecture series we covered:
 - Network programming concepts
 - Network programming in Python
 - How to compose a client
 - How to compose a server
 - Communication using char sequences
 - Communication using JSON docs
 - Communication using pickled Python objects
- See also...
 - **Appendix 1: Pickle Dangers**
 - **Appendix 2: Network Basics**
 - **Appendix 3: The Internet**

More Information

- The COS 333 *Lectures* web page provides references to supplementary information

Appendix 1: Pickle Dangers

Pickle Dangers

- **Question:** How does pickling work?
- **Answer (partial):**
 - `pickle.dump(obj, flo)`
 - Creates Python bytecode
 - The Python bytecode, when executed, creates `obj`
 - Writes the Python bytecode to `flo`
 - `obj = pickle.load(flo)`
 - Reads the Python bytecode from `flo`
 - Executes it to create `obj`

Pickle Dangers

- See commmalicious app

Server: On host 192.168.1.8

```
$ python server.py 55555 (1)
Opened server socket      (1)
Accepted connection      (4)
Wrote to client          (4)
```

Client

```
$ cat badfile.txt (2)
cat: badfile.txt: No such file or directory (2)
$ python client.py 192.168.1.8 55555 (3)
client.py: 'int' object is not iterable (5)
$ cat badfile.txt (6)
hello there (6)
$
```

Pickle Dangers

- See **commmalicious** app
 - **server.py**
 - **client.py**


When using the Python pickle module to communicate sensitive data, you must use secure communication (covered in the 2nd half of the course)

Appendix 2: Network Basics

Network Basics

- Networking
 - Huge topic
 - Can only scratch the surface
- Goal
 - Convey workable mental model
 - ... From programmer's point of view
- Approach
 - Bottom-up...

Network Basics

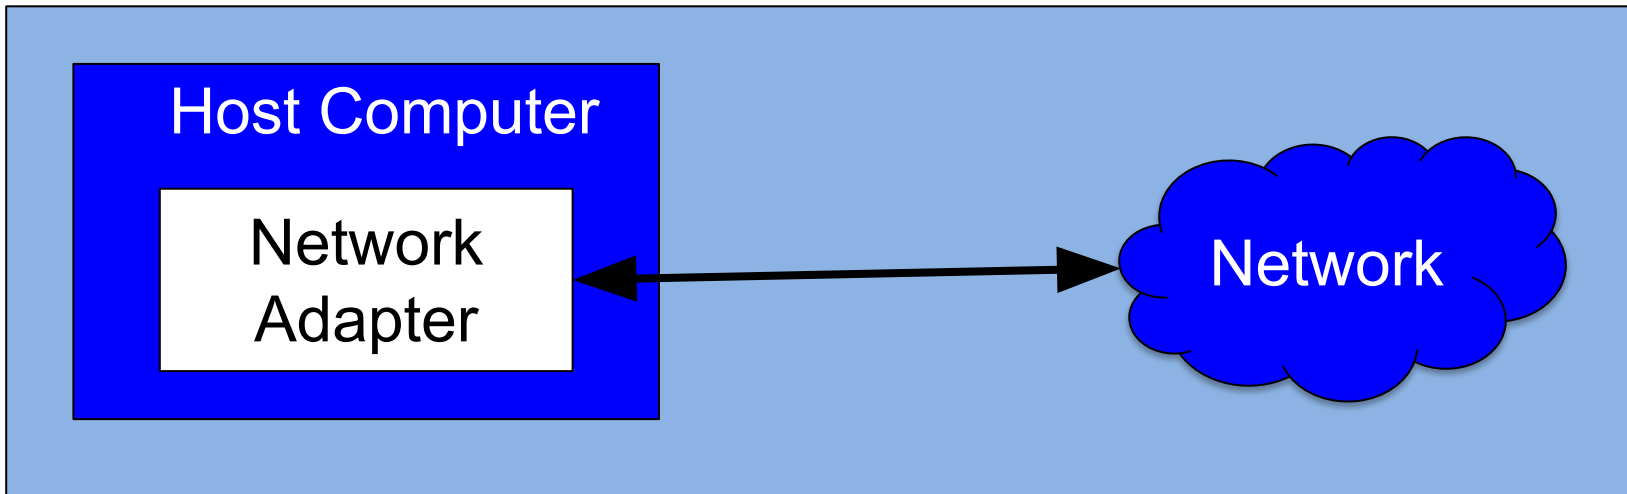

Network adapter:

HW that connects host computer to network

Each has unique "medium access control (MAC) address"

MAC address:

xx:xx:xx:yy:yy:yy, where each x and y is a hexadecimal digit


xx:xx:xx is unique to vendor

yy:yy:yy is unique to device

Network Basics

- Try on your computer (Mac or Linux):
 - `ifconfig`
 - Note “ether”
- Try on your computer (Windows):
 - `getmac`

Network Basics

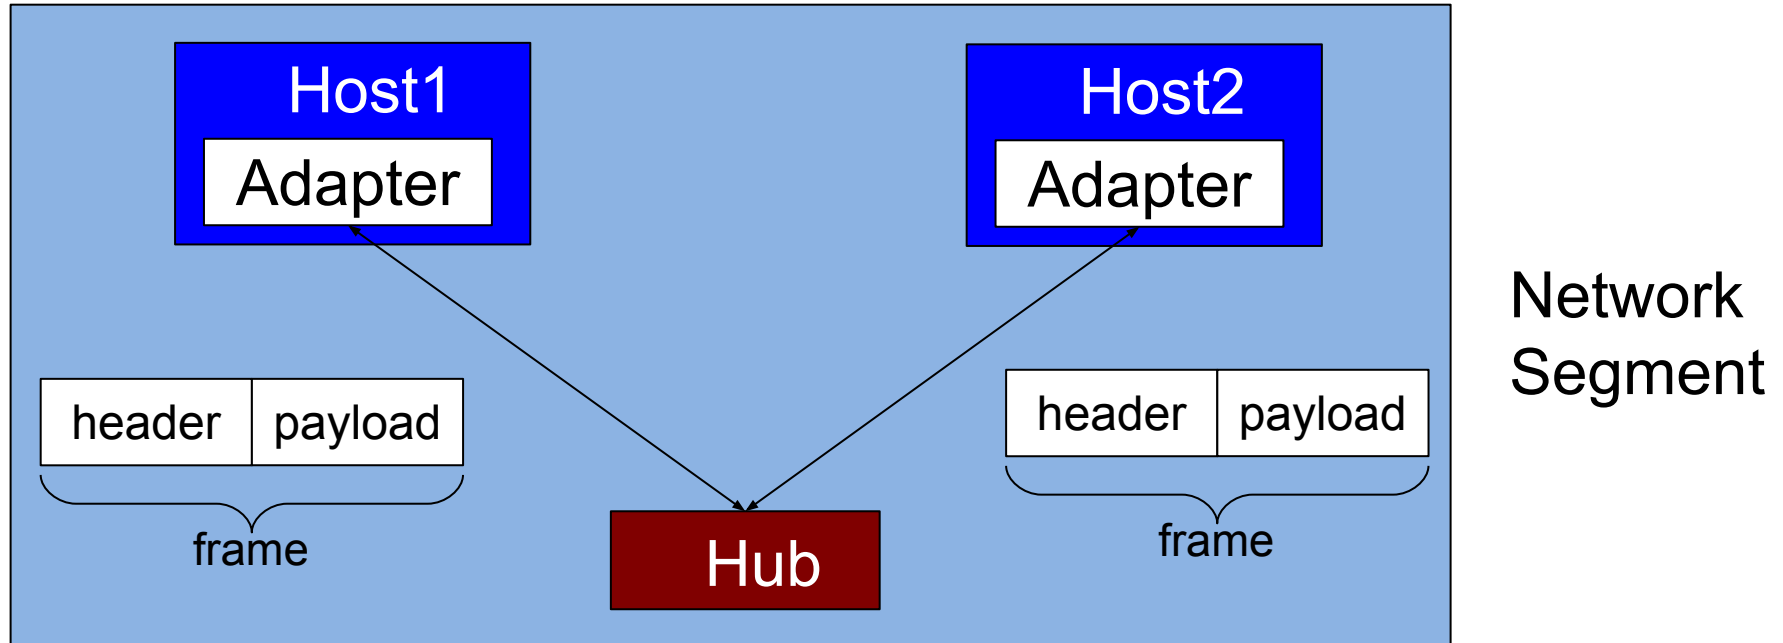

Frame = header + payload

Header identifies source and destination addresses

Payload contains user data

Hub (alias **repeater**) = HW (no SW) that transmits frames among hosts


Receives frame from adapter; doesn't examine header; copies to all others

Every adapter **sees** frame; only destination adapter **reads** it

Network Segment = hosts + hub

Scope: one room; one floor of a building

Network Basics

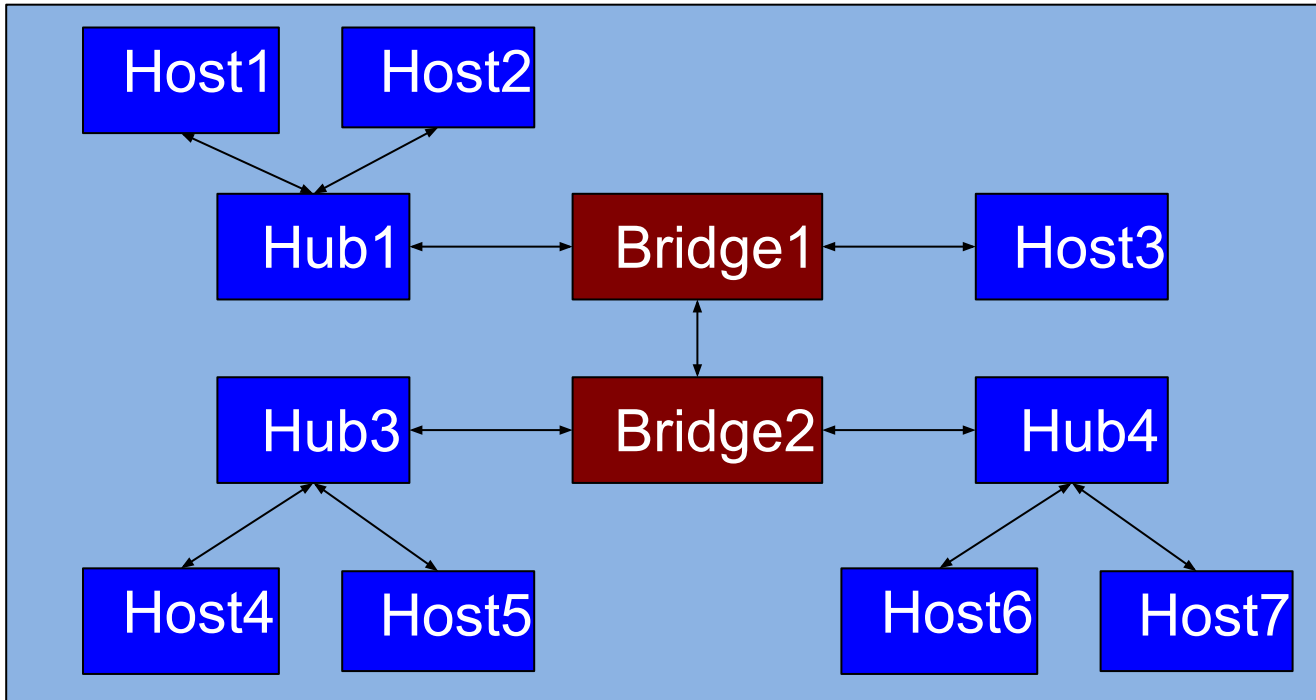

LAN

Bridge (alias **switch**) = HW+SW that connects hosts, hubs, other bridges

Does examine headers

Analyzes message sources; **learns** where hosts are


host1 → host2: hub1 → bridge1 → (discard)

host1 → host7: hub1 → bridge1 → bridge2 → hub4

Local Area Network (LAN) = hosts + hubs + bridges

Scope: one building; one campus

Network Basics

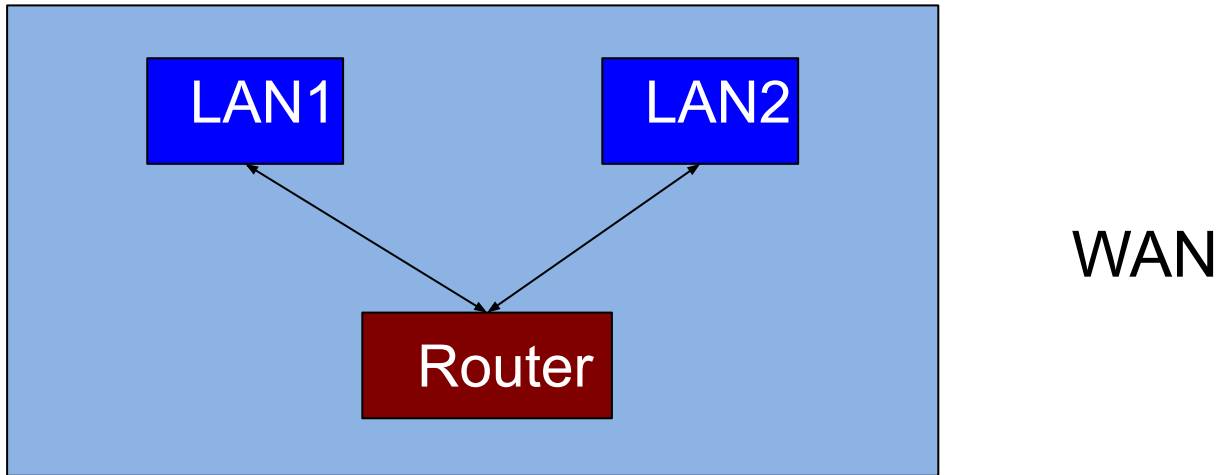

Router (~alias **gateway**) = HW that connects multiple (incompatible) LANs

Wide Area Network (WAN) = LANs + routers

Scope: planet Earth! And beyond!


Each host has both a LAN (MAC) address and a **WAN address**

LAN address: not related to network topology


WAN address: related to network topology

Network Basics


When Host1 on LAN1 sends a payload to Host2 on LAN2...

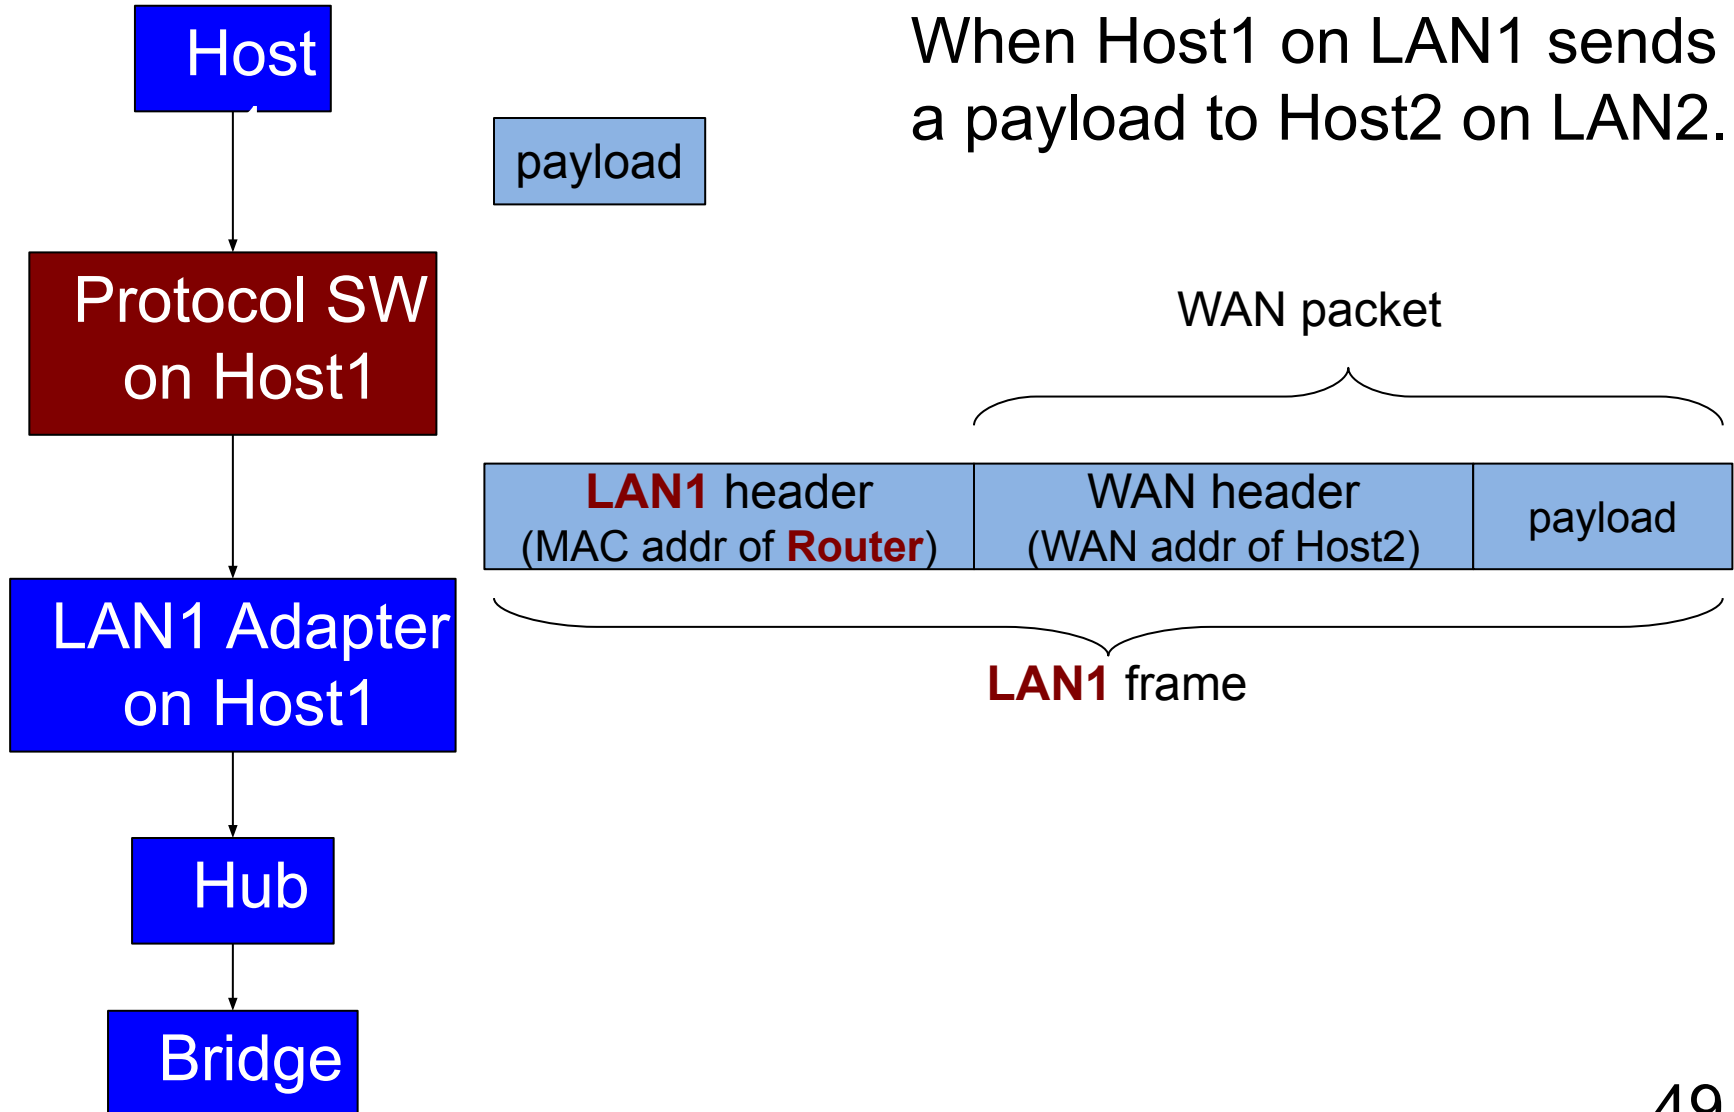


Network Basics

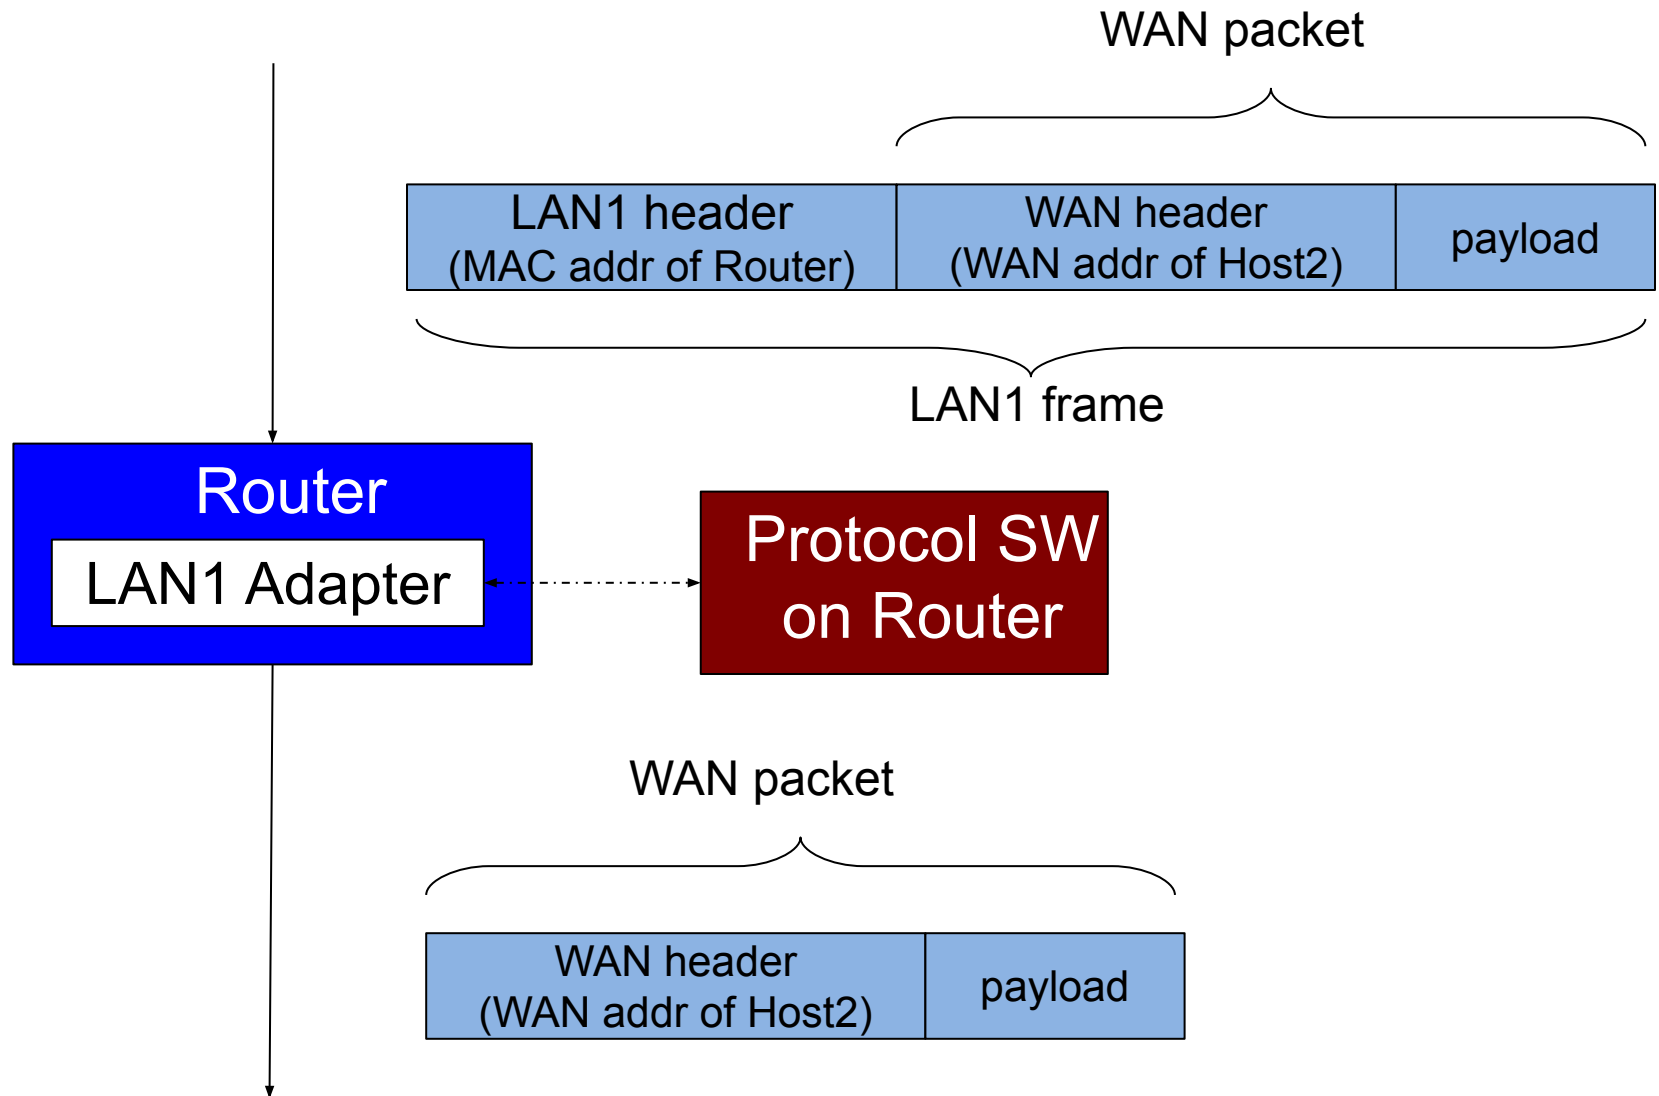

Network Basics

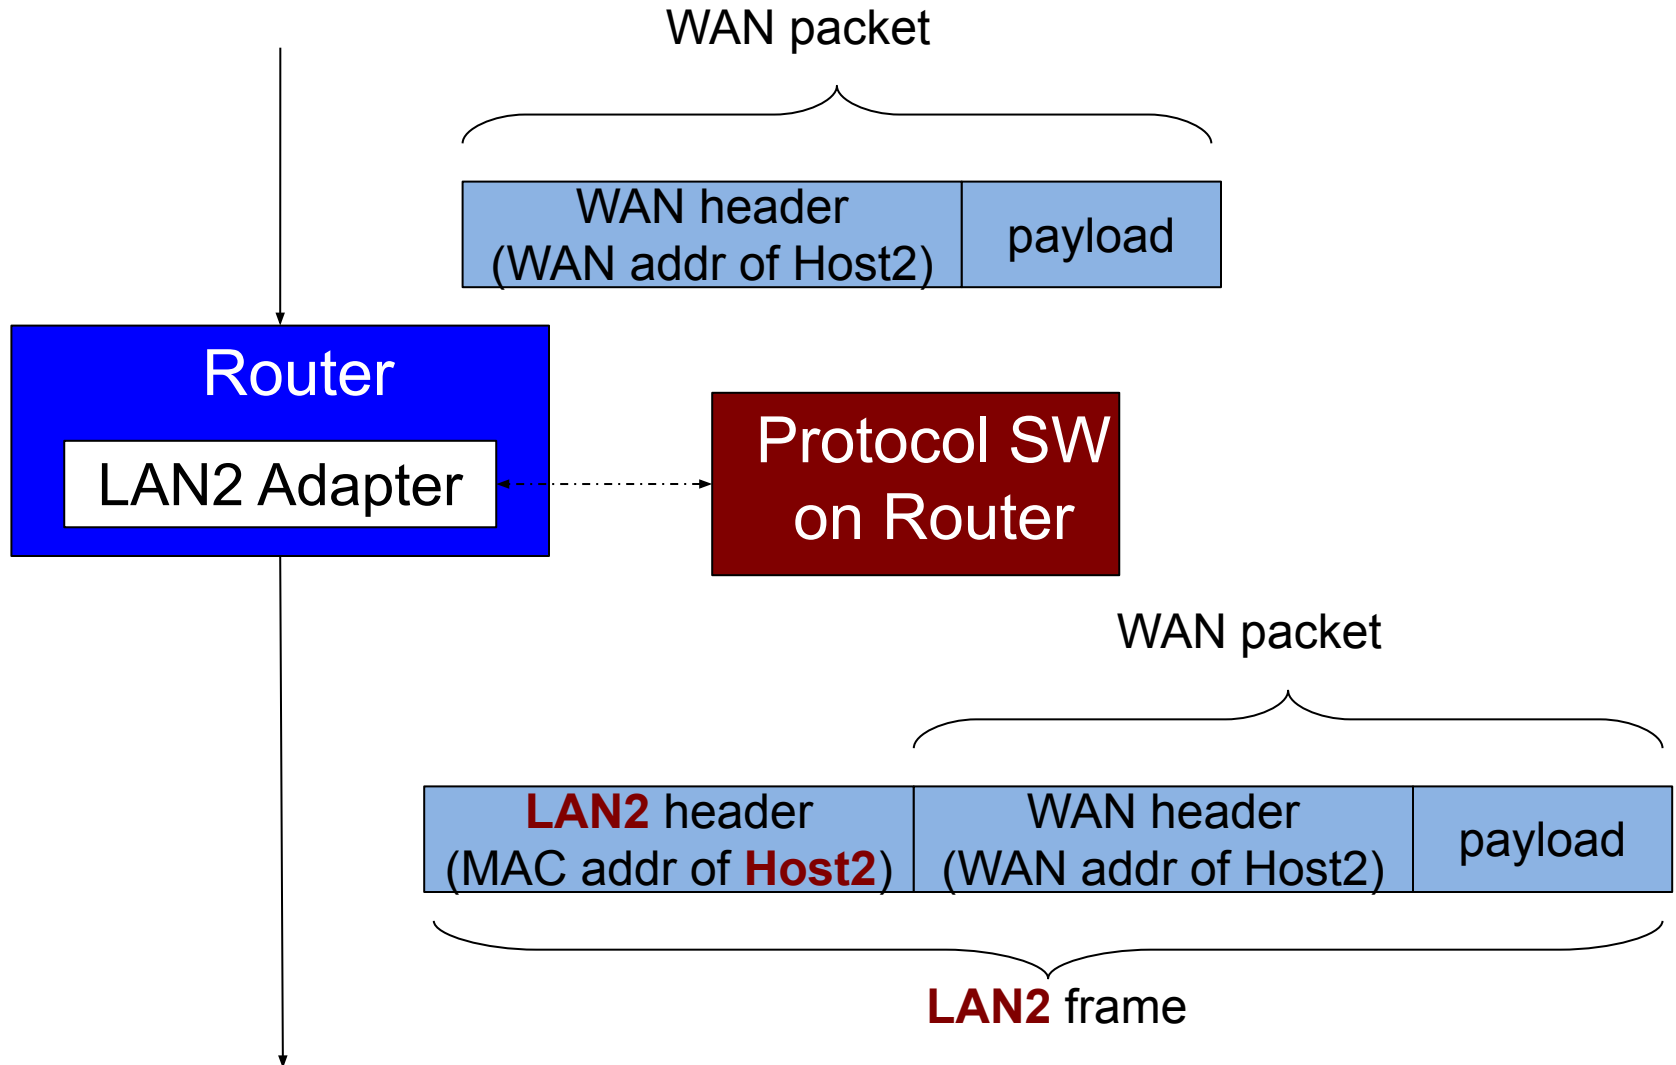


Network Basics

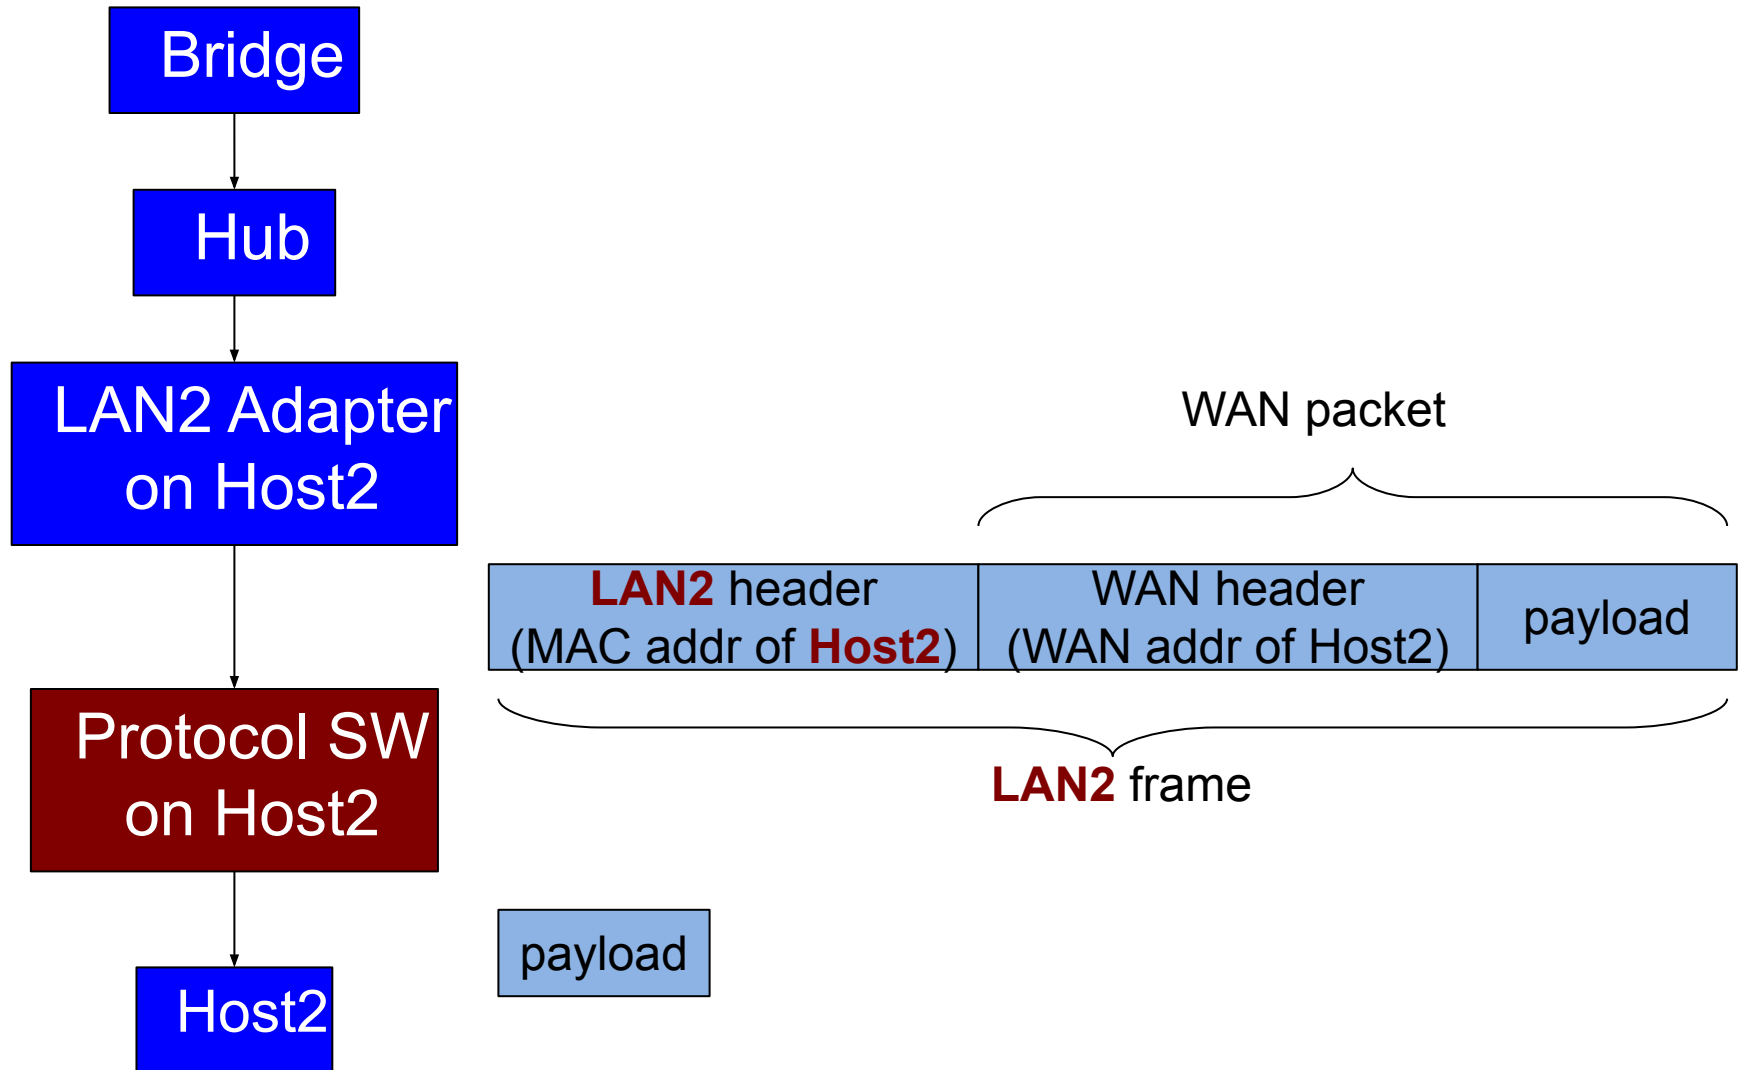

Network Basics

Generic Packet Structure

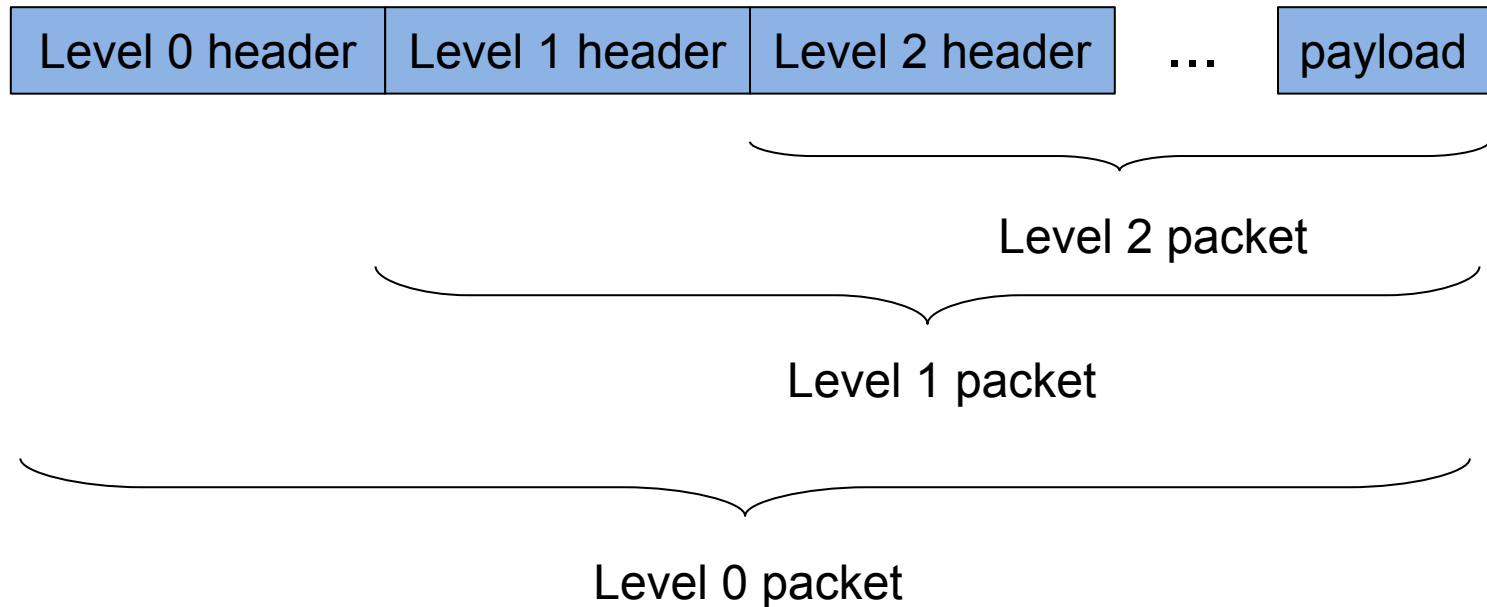

Protocols can be (and typically are) **layered/stacked**
And so packets can be (and typically are) **layered/stacked**


Appendix 3: The Internet

The Internet


- The Internet
 - A WAN that uses a particular protocol stack

The Internet

The Internet Protocol Stack

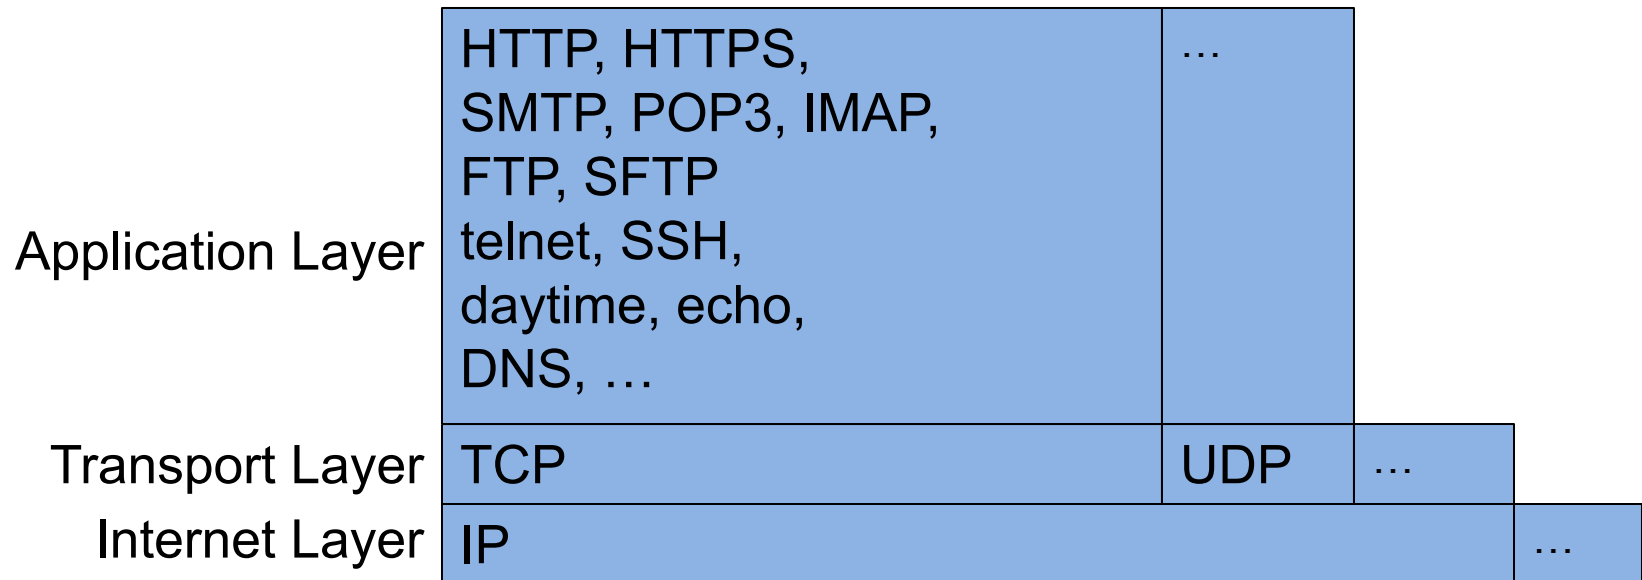


Typical Internet Packet Structure



The Internet

The Internet Protocol Stack

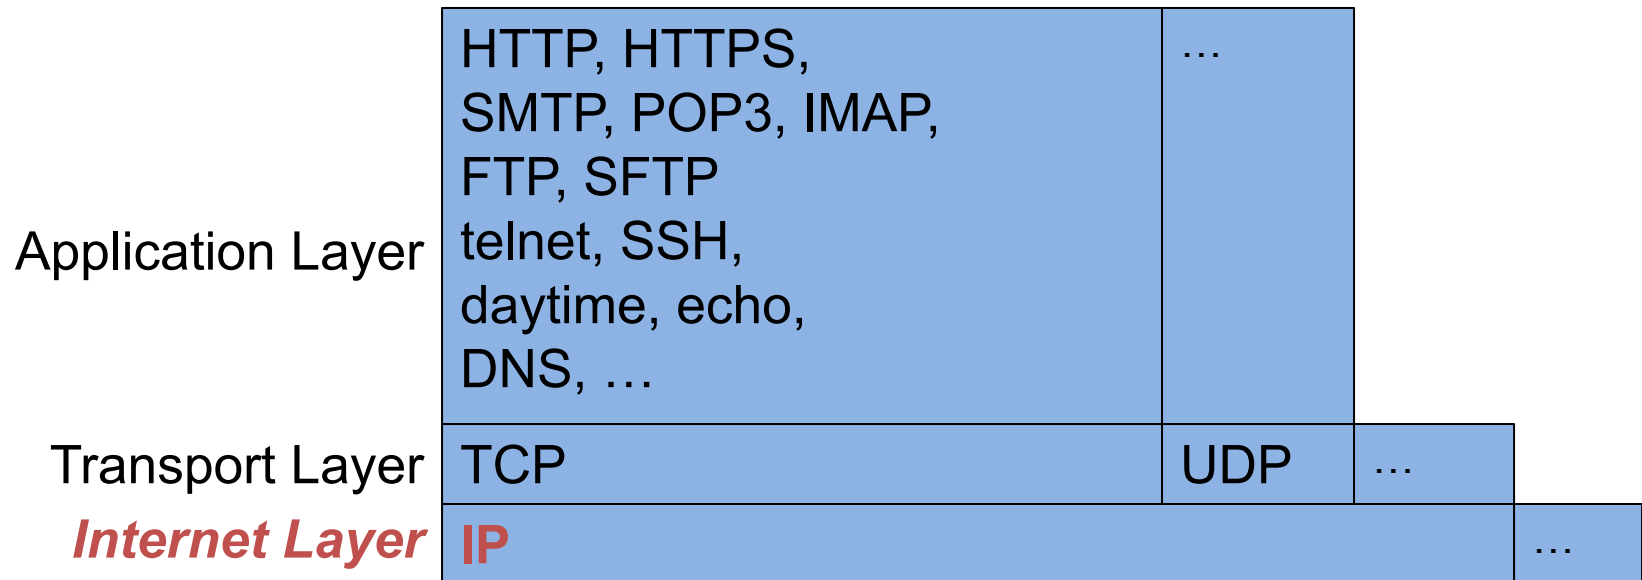

Dominant protocol: **IP (Internet Protocol)**...

The Internet

- IP characteristics
 - Connectionless
 - No persistent connection
 - Packetized
 - Sender splits long message into packets
 - Receiver re-assembles the packets
 - Unreliable
 - Packets can be lost (errors, congestion)
 - Receiver not notified of lost packets

The Internet

- IP Header
 - Source WAN address
 - Destination WAN address
 - ...

The Internet

- IP addresses
 - WAN address = *IP address*
 - Internal form: 32 bits
 - Human-readable form: “dotted decimal”
 - xxx.xxx.xxx.xxx

The Internet

Some IP Addresses:

IP Address	Computer
128.112.136.61	Princeton CS Dept computer
129.6.15.28	A US gov computer
127.0.0.1	The local host

The Internet

- Try on your computer (Mac or Linux):
 - `ifconfig`
 - Note “inet”
- Try on your computer (Windows):
 - `ipconfig`
 - Note “IPv4 address”
- Note: 127.0.0.1 is IP address of “the local host”
 - Useful for testing networking apps

The Internet

- **Problem:** Difficult for humans to remember/use “dotted decimal” IP addresses
- **Solution:** Domain names
- ***Domain name*:** A symbolic name for IP address(es)
 - Example: cs.princeton.edu
 - Example: time-a.nist.gov
 - Example: localhost

The Internet

- **Problem:** How to map domain name to IP address(es)?
- **Early Solution:** hosts.txt file at SRI International
 - Downloaded ~weekly
 - Didn't scale
- **Current Solution:** *Domain Name System*


The Internet

- ***Domain name system (DNS)***
 - The “phone book” of the Internet
 - Maps domain names to their IP addresses
 - Distributed hierarchical database

The Internet

The Domain Name System


What is
cs.princeton.edu?

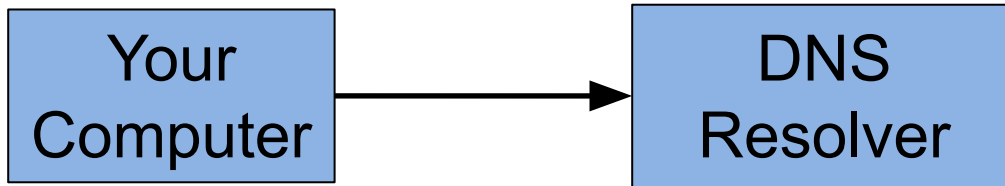

References
cs.princeton.edu


The Internet

The Domain Name System

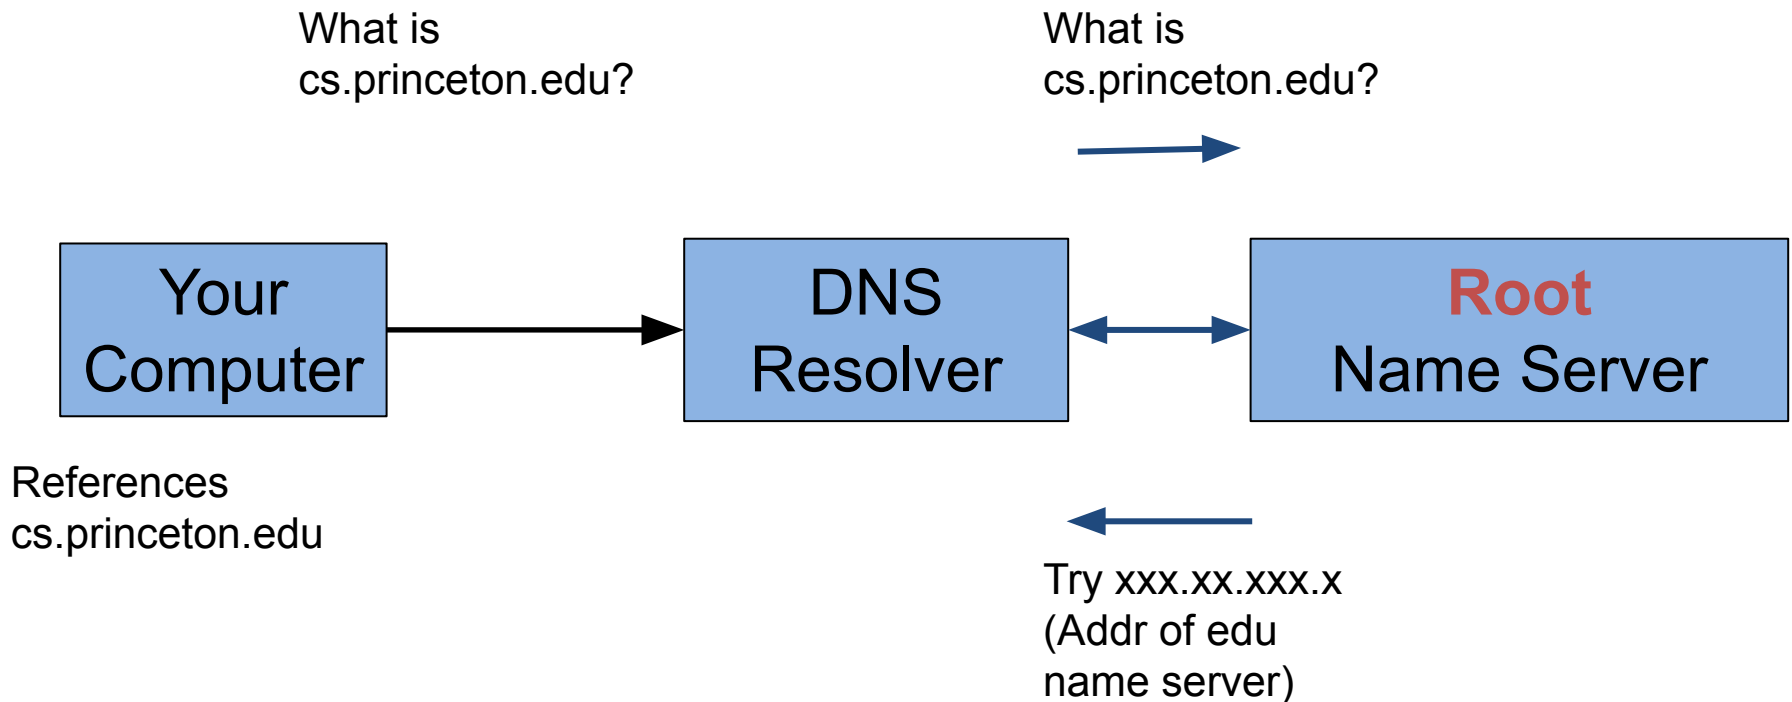


The Internet

The Domain Name System

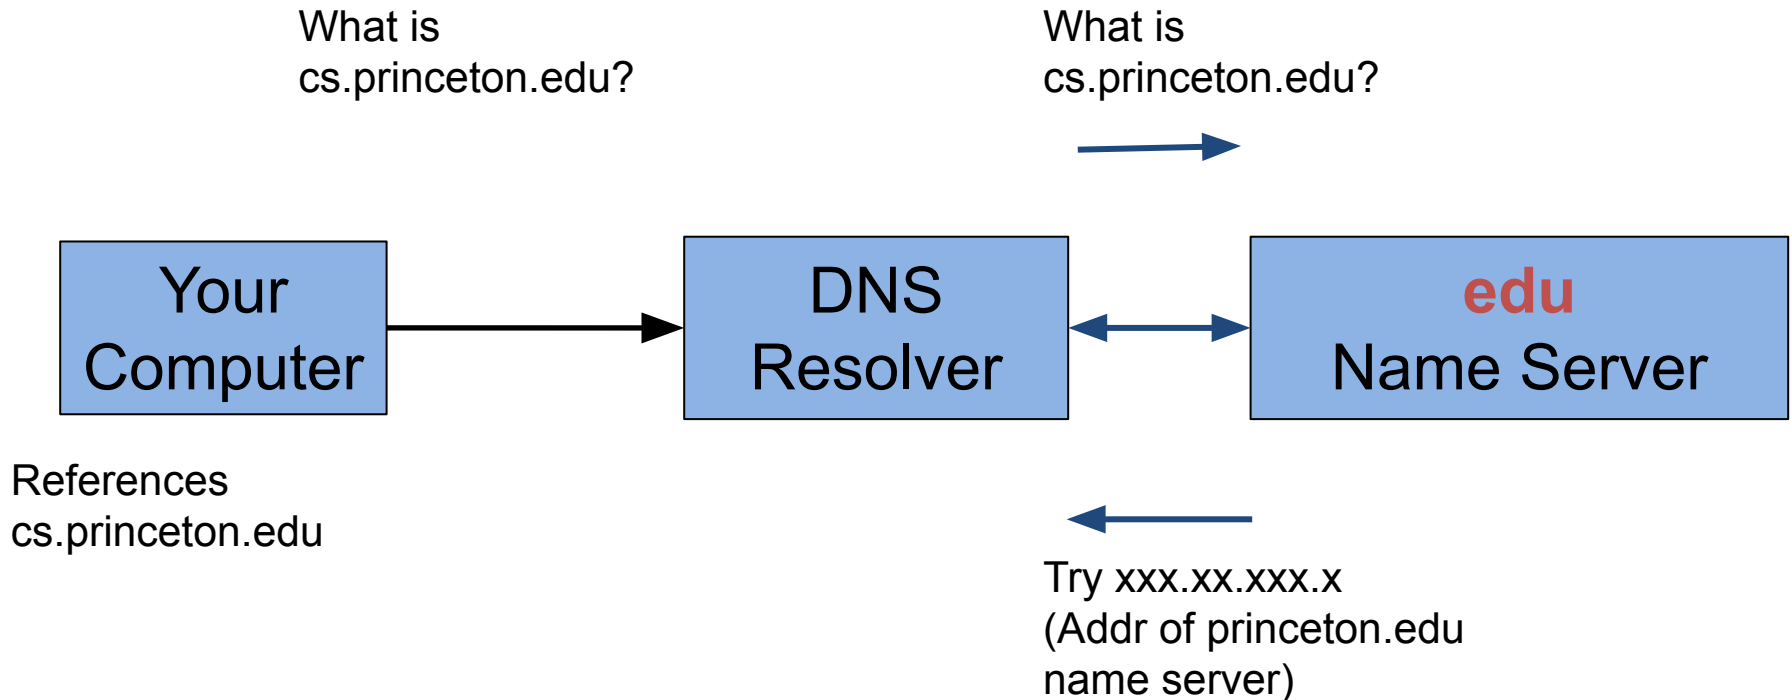

The Internet


The Domain Name System

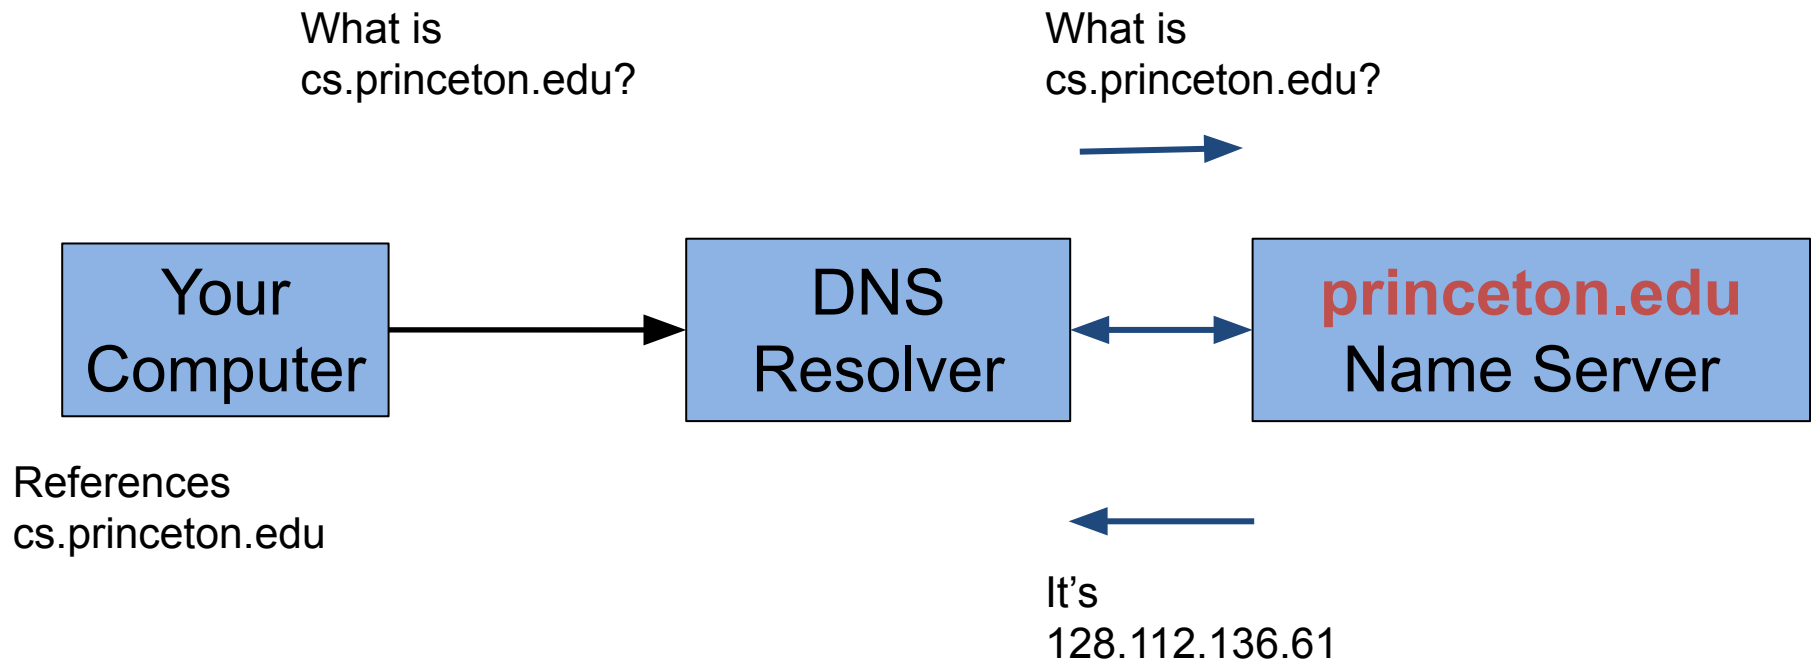

The Internet

The Domain Name System

It's
128.112.136.61

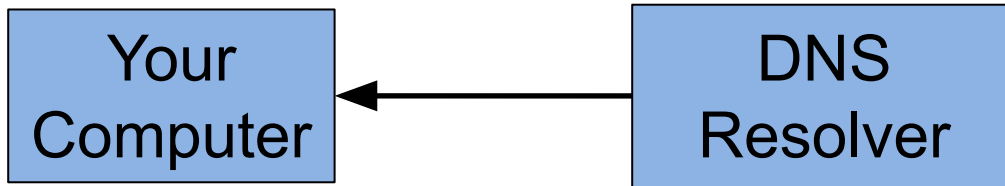

References
cs.princeton.edu

The Internet

DNS root servers:



Many hundreds; over 130 physical locations

The Internet

- **Question:** How can DNS root servers handle the heavy workload?
- **Answer:** Caching at each level of the DNS hierarchy
- In reality, root servers handle mostly silly requests

The Internet


- Try (on Linux, Mac, Windows):
 - `nslookup cs.princeton.edu`
 - `nslookup time-a.nist.gov`
 - `nslookup nonexistentdomainname`

The Internet

- See **ipaddress.py**
 - `python ipaddress.py
cs.princeton.edu`
 - `python ipaddress.py
time-a.nist.gov`
 - `python ipaddress.py localhost`
 - `python ipaddress.py
nonexistingdomainname`

The Internet

The Internet Protocol Stack

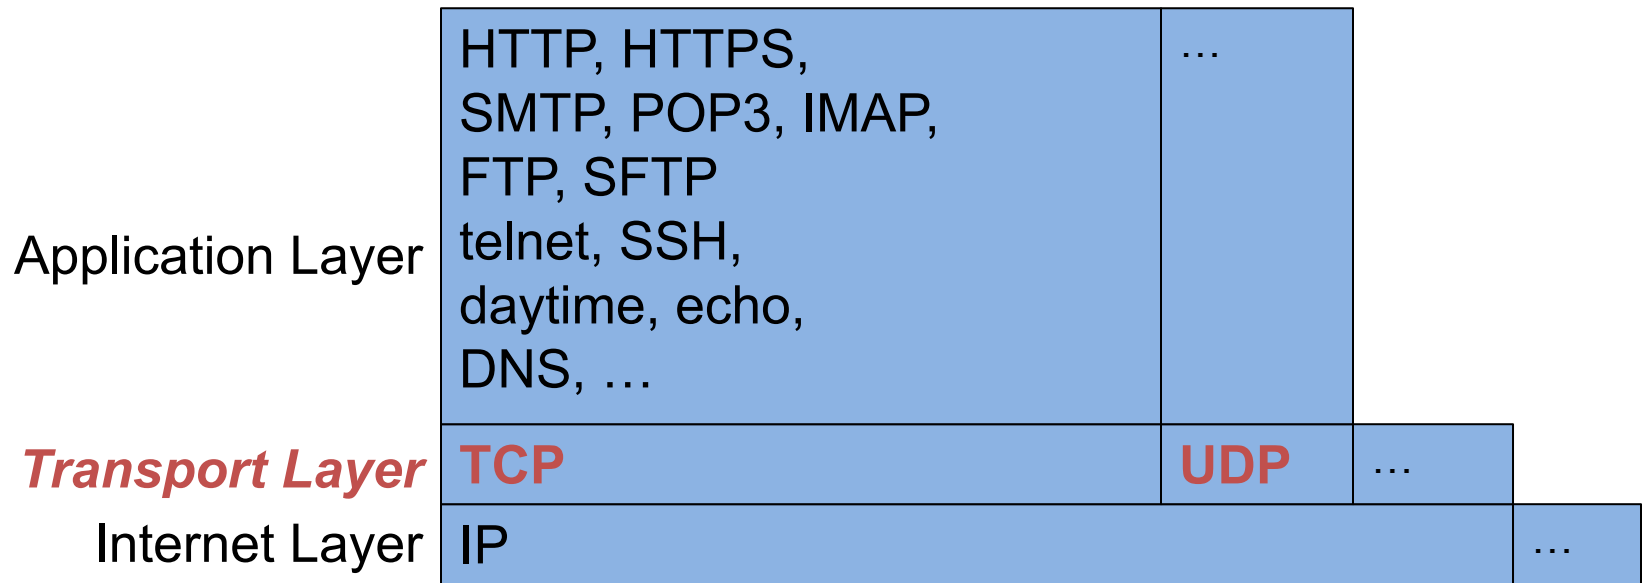

Dominant protocols

- **UDP (User Datagram Protocol)**
- **TCP (Transmission Control Protocol)**

The Internet

- UDP characteristics
 - Connections are not persistent
 - Connections are unreliable
 - Adds *port* number to IP protocol
- Why UDP?
 - Fast
 - Not all applications need reliable transmission
 - E.g. streaming audio
 - E.g. DNS
- We will not use UDP in COS 333

The Internet

- TCP characteristics
 - Connections are persistent
 - “Virtual circuit”
 - Connections are reliable
 - Reassembles packets in proper order
 - Requests resend of missing/corrupted packets
 - “Ordered reliable byte stream”
 - Recall file descriptors
- Most Internet apps use TCP
- We will use TCP in COS 333

The Internet

- Header
 - Source *port*
 - Destination *port*
 - ...

The Internet

- **Port**
 - A software abstraction
 - 16-bit integer
 - Identifies unique process on specified host
- Client and server communicate via ports
 - **Known** port on server
 - **Ephemeral** port on client
- Ports allow comm between specific **processes** on specific hosts (as opposed to comm between **hosts**)

The Internet

- Port numbers
 - 0-1023: *Well-Known* Server Ports
 - Used by common servers (HTTP, FTP, etc.)
 - 1024-49151: *Registered* Server Ports
 - Registered by software vendors to reduce likelihood of conflicts
 - 49152-65535: *Dynamic/Private* Ports
 - Available for any purpose

The Internet

Some Well-Known Server Ports


Port	Kind of Process
7	echo
13	daytime
20	FTP-control
21	FTP-data
22	SSH, SFTP
23	telnet
25	SMTP
53	DNS
80	HTTP
110	POP2
143	IMAP
443	HTTPS

Some Registered Server Ports

Port	Kind of Process
3306	MySQL
5432	PostgreSQL
6379	Redis
8080	Apache Tomcat
27017	MongoDB

The Internet

The Internet Protocol Stack

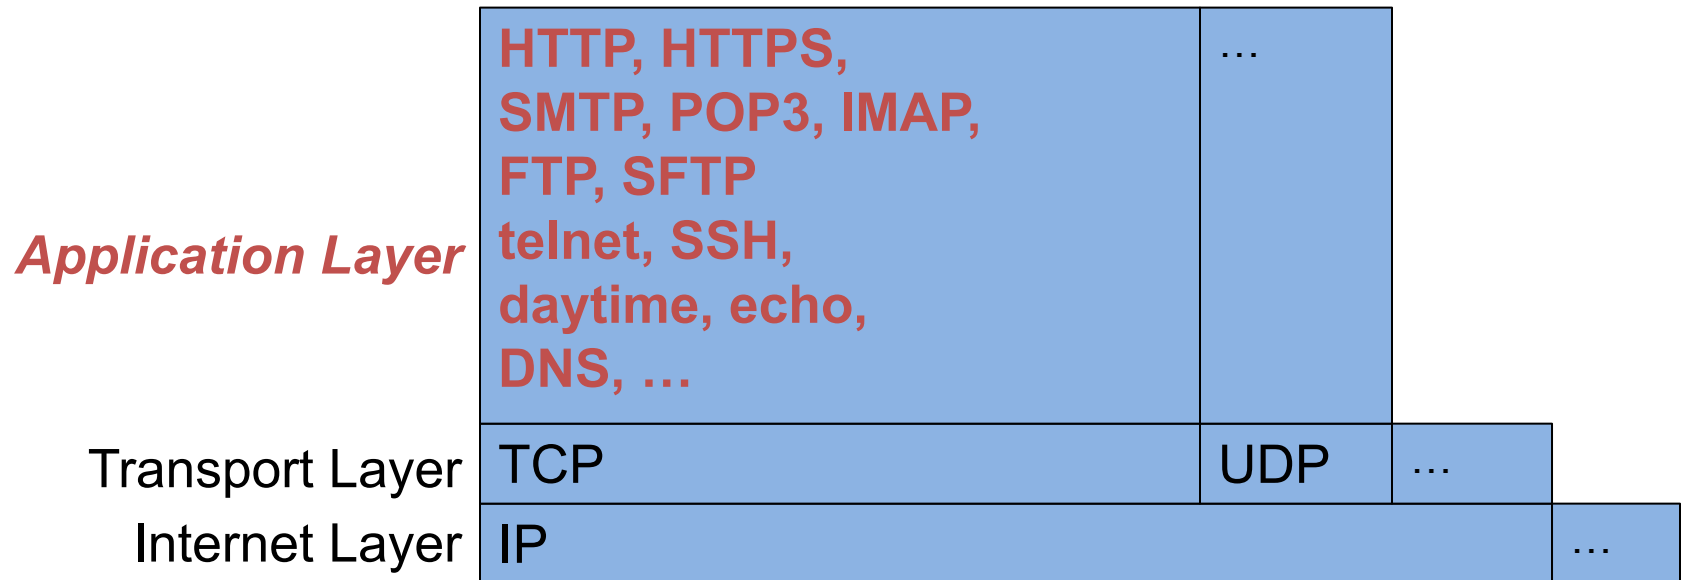

Many protocols, each with its own header/payload format...

The Internet

Some application layer protocols:

Protocol	Internet Application
daytime	Time of Day
echo	Echo
HTTP (Hypertext Transfer Protocol) HTTPS (Hypertext Transfer Protocol Secure)	World Wide Web
SMTP (Simple Mail Transfer Protocol) POP3 (Post Office Protocol 3) IMAP (Internet Message Address Protocol)	E-Mail
FTP (File Transfer Protocol) SFTP (Secure File Transfer Protocol)	File Transfer
Telnet SSH (Secure Shell)	Remote Shell
DNS (Domain Name System)	DNS

The Internet

The Internet Protocol Hourglass

