


# Undirected Graphs

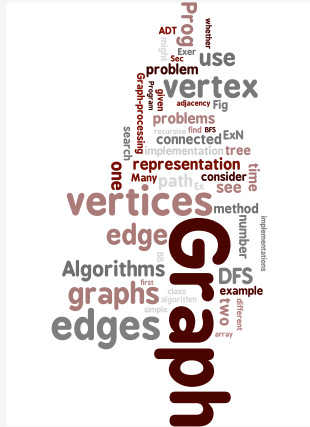

- ▶ graph API
- ▶ maze exploration
- ▶ depth-first search
- ▶ breadth-first search
- ▶ connected components
- ▶ challenges



References:  
 Algorithms in Java (Part 5), Chapters 17 and 18  
<http://www.cs.princeton.edu/algs4/51undirected>

## Undirected graphs


**Graph.** Set of **vertices** connected pairwise by **edges**.

Why study graph algorithms?


- Interesting and broadly useful abstraction.
- Challenging branch of computer science and discrete math.
- Hundreds of graph algorithms known.
- Thousands of practical applications.

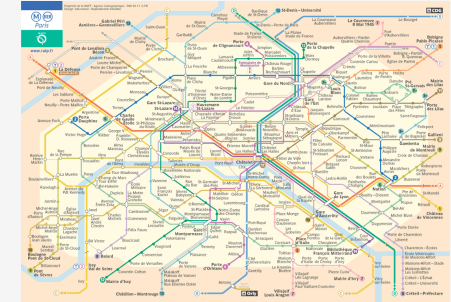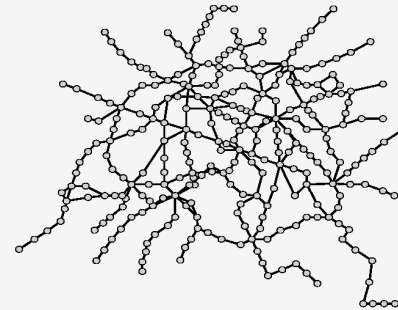

## Eisenhower interstate system (simplified)

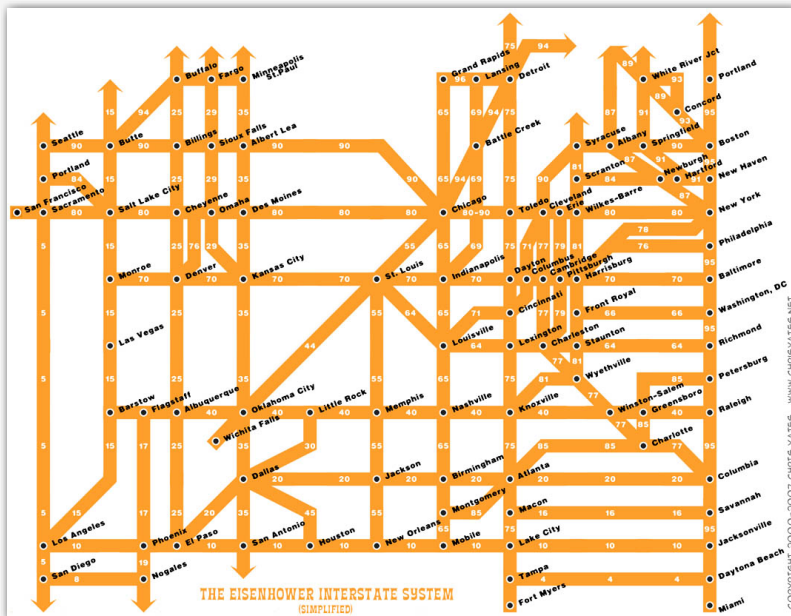


## Protein interaction network

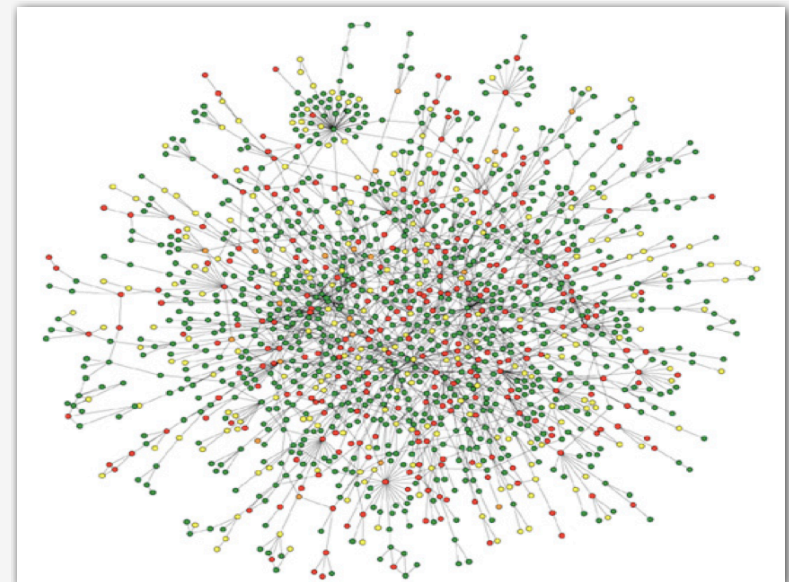

Reference: Jeong et al, Nature Review | Genetics


## The Internet as mapped by the Opte Project

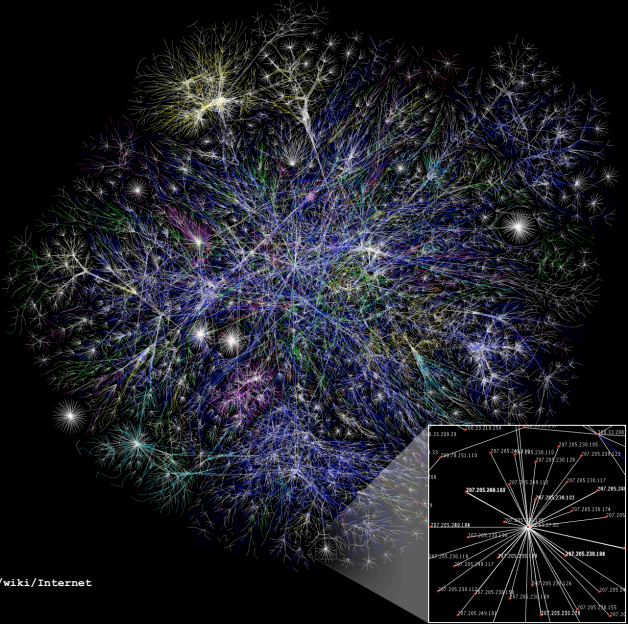

<http://en.wikipedia.org/wiki/Internet>


## Social networks

high school dating

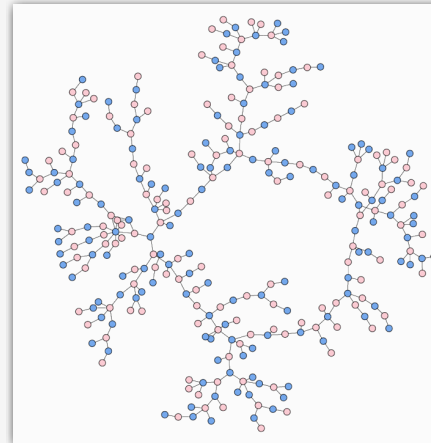


Reference: Bearman, Moody and Stovel, 2004  
image by Mark Newman

corporate e-mail

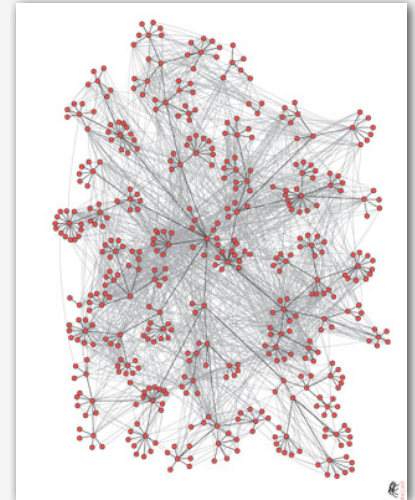

Reference: Adamic and Adar, 2004


## Kevin's facebook friends (Princeton network)

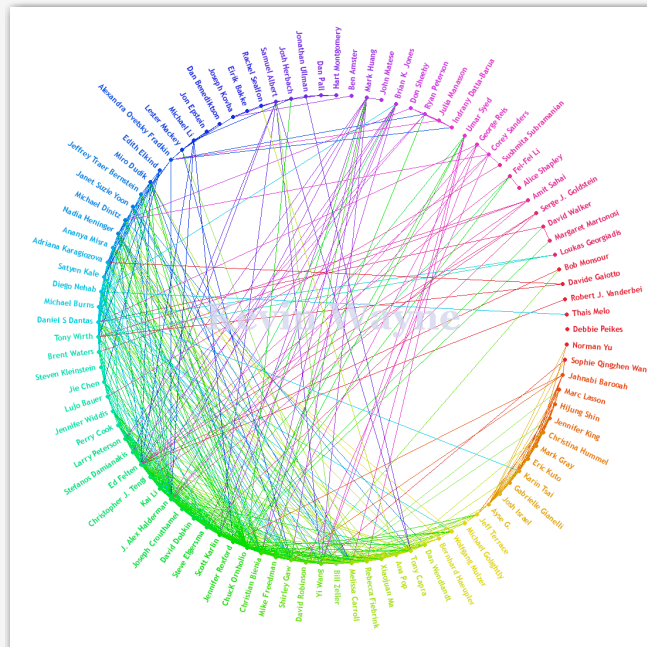

## Graph applications

graph	vertex	edge
communication	telephone, computer	fiber optic cable
circuit	gate, register, processor	wire
mechanical	joint	rod, beam, spring
financial	stock, currency	transactions
transportation	street intersection, airport	highway, airway route
internet	class C network	connection
game	board position	legal move
social relationship	person, actor	friendship, movie cast
neural network	neuron	synapse
protein network	protein	protein-protein interaction
chemical compound	molecule	bond

## Graph terminology

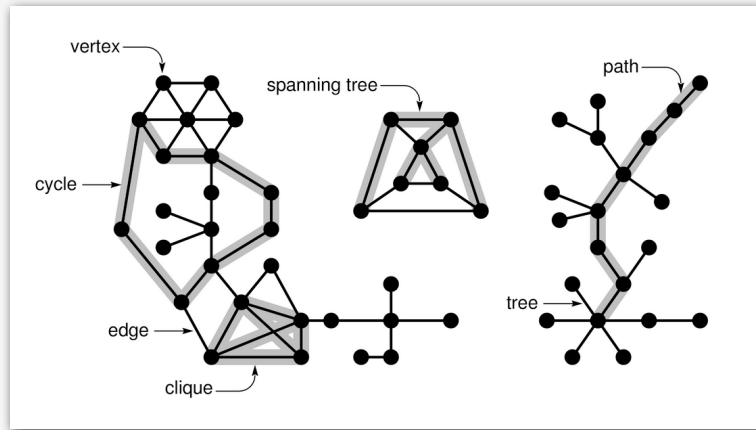

9

## Some graph-processing problems

**Path.** Is there a path between  $s$  and  $t$ ?

**Shortest path.** What is the shortest path between  $s$  and  $t$ ?

**Cycle.** Is there a cycle in the graph?

**Euler tour.** Is there a cycle that uses each edge exactly once?

**Hamilton tour.** Is there a cycle that uses each vertex exactly once?

**Connectivity.** Is there a way to connect all of the vertices?

**MST.** What is the best way to connect all of the vertices?

**Biconnectivity.** Is there a vertex whose removal disconnects the graph?

**Planarity.** Can you draw the graph in the plane with no crossing edges?

**Graph isomorphism.** Do two adjacency matrices represent the same graph?

**Challenge.** Which of these problems are easy? difficult? intractable?

10

### graph API


- ▶ maze exploration
- ▶ depth-first search
- ▶ breadth-first search
- ▶ connected components
- ▶ challenges

11

## Graph representation

### Vertex representation.

- This lecture: use integers between 0 and  $V-1$ .
- Real world: convert between names and integers with symbol table.

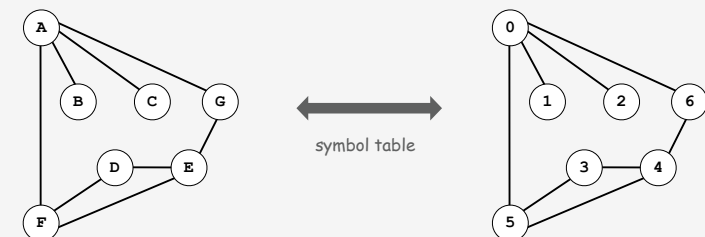

**Other issues.** Parallel edges, self-loops.

12

## Graph API

<code>public class Graph</code>	<i>graph data type</i>
<code>Graph(int V)</code>	<i>create an empty graph with V vertices</i>
<code>Graph(In in)</code>	<i>create a graph from input stream</i>
<code>void addEdge(int v, int w)</code>	<i>add an edge v-w</i>
<code>Iterable&lt;Integer&gt; adj(int v)</code>	<i>return an iterator over the neighbors of v</i>
<code>int V()</code>	<i>return number of vertices</i>
<code>String toString()</code>	<i>return a string representation</i>

```
In in = new In();
Graph G = new Graph(in);
StdOut.println(G);
```

← read graph from standard input

```
for (int v = 0; v < G.V(); v++)
    for (int w : G.adj(v))
        /* process edge v-w */
```


← process both v-w and w-v

```
% more tiny.txt
7
0 1
0 2
0 5
3 4
3 5
4 6
```

13

## Set of edges representation

Store a list of the edges (linked list or array).

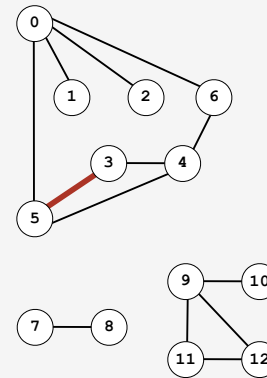


0 1
0 2
0 5
0 6
3 4
3 5
4 6
7 8
9 10
9 11
9 12

14

## Adjacency-matrix representation

Maintain a two-dimensional V-by-V boolean array;  
for each edge v-w in graph:  $adj[v][w] = adj[w][v] = true$ .

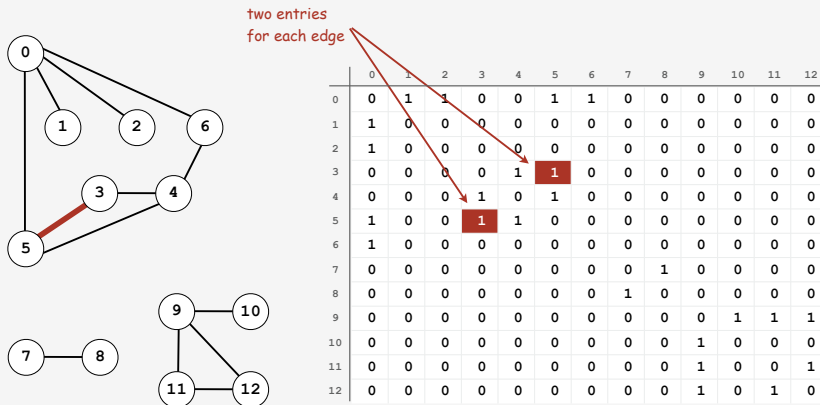

two entries for each edge

15

## Adjacency-matrix representation: Java implementation

```
public class Graph
{
    private final int V;
    private final boolean[][] adj;

    public Graph(int V)
    {
        this.V = V;
        adj = new boolean[V][V];
    }

    public void addEdge(int v, int w)
    {
        adj[v][w] = true;
        adj[w][v] = true;
    }

    public Iterable<Integer> adj(int v)
    {
        return new AdjIterator(v);
    }
}
```

← adjacency matrix

← create empty graph with V vertices


← add edge v-w (no parallel edges)

← iterator for v's neighbors (code for AdjIterator omitted)

16

## Adjacency-list representation


Maintain vertex-indexed array of lists (implementation omitted).

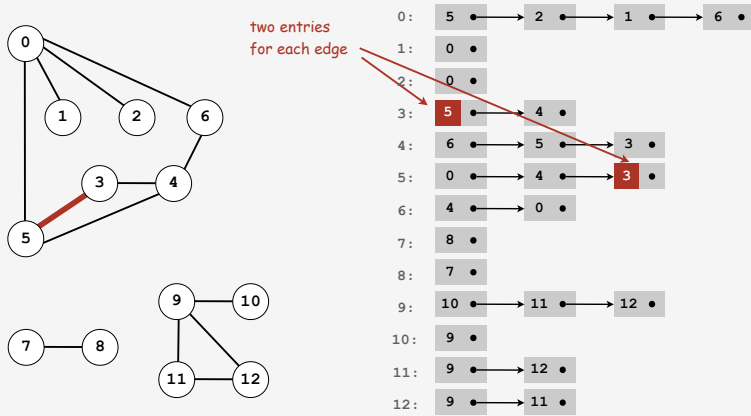

17

## Adjacency-set graph representation

Maintain vertex-indexed array of sets.

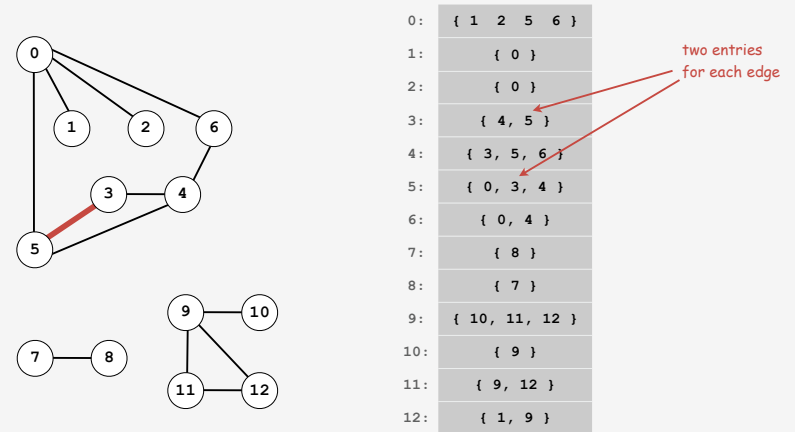

18

## Adjacency-set representation: Java implementation

```

public class Graph
{
    private final int V;
    private final SET<Integer>[] adj;

    public Graph(int V)
    {
        this.V = V;
        adj = (SET<Integer>[]) new SET[V];
        for (int v = 0; v < V; v++)
            adj[v] = new SET<Integer>();
    }

    public void addEdge(int v, int w)
    {
        adj[v].add(w);
        adj[w].add(v);
    }

    public Iterable<Integer> adj(int v)
    { return adj[v]; }
}
    
```

adjacency sets

create empty graph with V vertices

add edge v-w (no parallel edges)

iterator for v's neighbors

19

## Graph representations

**In practice.** Use adjacency-set (or adjacency-list) representation.

- Algs all based on iterating over edges incident to  $v$ .
- Real-world graphs tend to be "sparse."

huge number of vertices,  
small average vertex degree

representation	space	edge between $v$ and $w$ ?	iterate over edges incident to $v$ ?
list of edges	$E$	$E$	$E$
adjacency matrix	$V^2$	1	$V$
adjacency list	$E + V$	degree( $v$ )	degree( $v$ )
adjacency set	$E + V$	log (degree( $v$ ))	degree( $v$ )

20


- › graph API
- › maze exploration
- › depth-first search
- › breadth-first search
- › connected components
- › challenges

21

## Maze exploration

### Maze graphs.

- Vertex = intersection.
- Edge = passage.

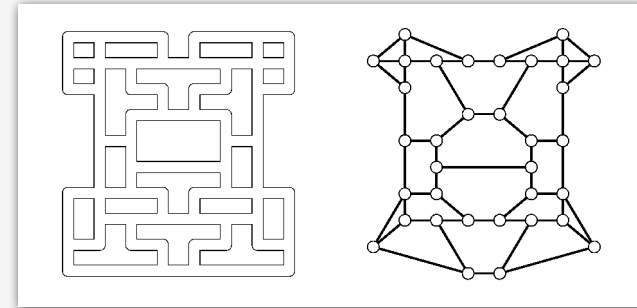

**Goal.** Explore every passage in the maze.


22

## Trémaux maze exploration

### Algorithm.


- Unroll a ball of string behind you.
- Mark each visited intersection by turning on a light.
- Mark each visited passage by opening a door.

**First use?** Theseus entered labyrinth to kill the monstrous Minotaur; Ariadne held ball of string.




Claude Shannon (with Theseus mouse)

23

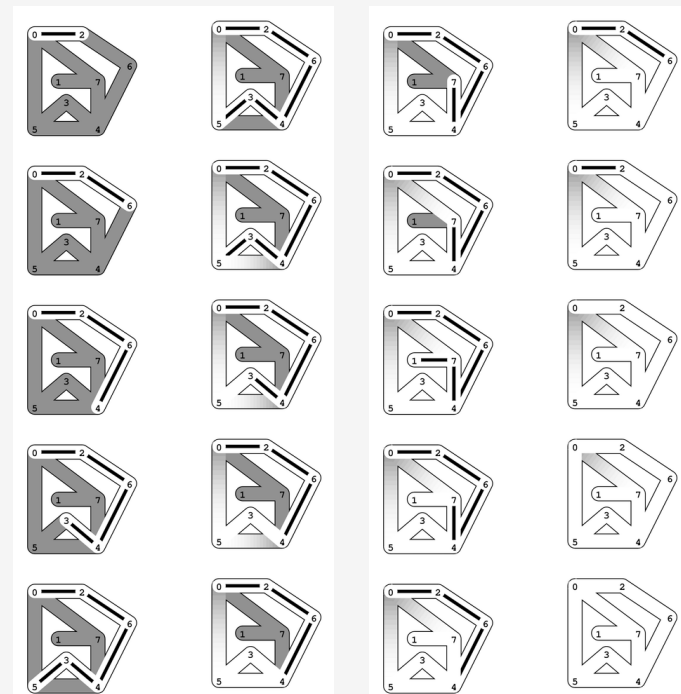


24

## Maze exploration

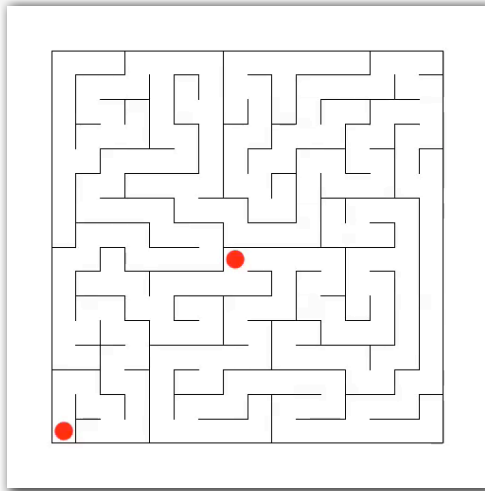

25

## Maze exploration

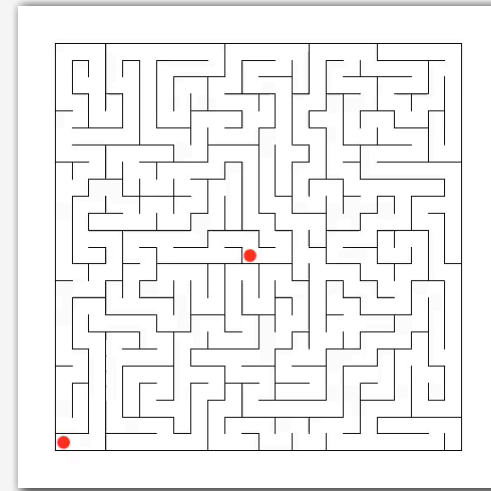

26

## Rat in a maze

**Rat In a Maze**  
using a stack

pathLength = 12  
Number of walls = 127  
Speed = 3 frames/sec  
To pause path construction press pause

Instructions.....  
1) "place walls" as you wish  
2) "find path"  
3) "clear maze" or "clear path" and repeat  
NOTE: instead of making a maze  
you can use a "premade maze"

S start tile  
F finish tile  
wall tile  
path tile  
blocked tile

place walls find path pause speed  
clear path clear maze Random

—BIBO GAMES—

27

- › graph API
- › maze exploration
- › **depth-first search**
- › breadth-first search
- › connected components
- › challenges

28

## Depth-first search


**Goal.** Systematically search through a graph.

**Idea.** Mimic maze exploration.

*DFS (to visit a vertex  $s$ )*

*Mark  $s$  as visited.*

*Recursively visit all unmarked vertices  $v$  adjacent to  $s$ .*

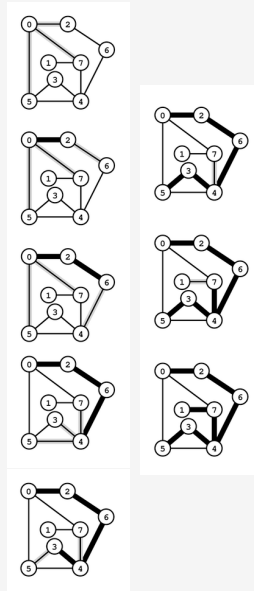

**Running time.**

- $O(E)$  since each edge examined at most twice.
- Usually less than  $V$  to find paths in real graphs.
- **Typical applications.**
- Find all vertices connected to a given  $s$ .
- Find a path from  $s$  to  $t$ .

## Design pattern for graph processing

**Design goal.** Decouple graph data type from graph processing.

```
// print all vertices connected to s
In in = new In(args[0]);
Graph G = new Graph(in);
int s = 0;
DFSearcher dfs = new DFSearcher(G, s);
for (int v = 0; v < G.V(); v++)
    if (dfs.isConnected(v))
        StdOut.println(v);
```

**Typical client program.**

- Create a `Graph`.
- Pass the `Graph` to a graph-processing routine, e.g., `DFSearcher`.
- Query the graph-processing routine for information.

30

## Depth-first search (connectivity)

```
public class DFSearcher
```

```
{
    private boolean[] marked;
```

← true if connected to  $s$

```
    public DFSearcher(Graph G, int s)
```

```
    {
        marked = new boolean[G.V()];
        dfs(G, s);
    }
```

← constructor marks vertices connected to  $s$

```
    private void dfs(Graph G, int v)
```

```
    {
        marked[v] = true;
        for (int w : G.adj(v))
            if (!marked[w]) dfs(G, w);
    }
```

← recursive DFS does the work

```
    public boolean isConnected(int v)
```

```
    { return marked[v]; }
```

← client can ask whether any vertex is connected to  $s$

```
}
```

31

## Flood fill

Photoshop "magic wand"



32



## Graph-processing challenge 1

**Problem.** Flood fill.

**Assumptions.** Picture has millions to billions of pixels.

**How difficult?**

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.



33

## Connectivity application: flood fill

Change color of entire blob of neighboring **red** pixels to **blue**.

Build a **grid graph**.

- Vertex: pixel.
- Edge: between two adjacent red pixels.
- Blob: all pixels connected to given pixel.

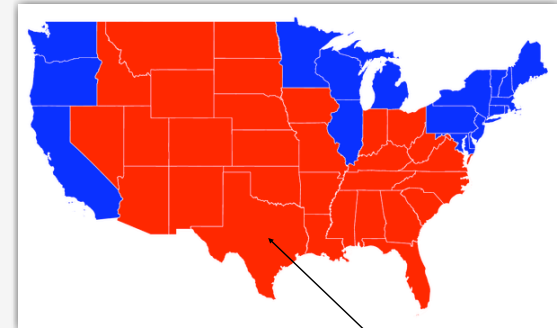

recolor red blob to blue



34

## Connectivity application: flood fill

Change color of entire blob of neighboring **red** pixels to **blue**.

Build a **grid graph**.

- Vertex: pixel.
- Edge: between two adjacent red pixels.
- Blob: all pixels connected to given pixel.

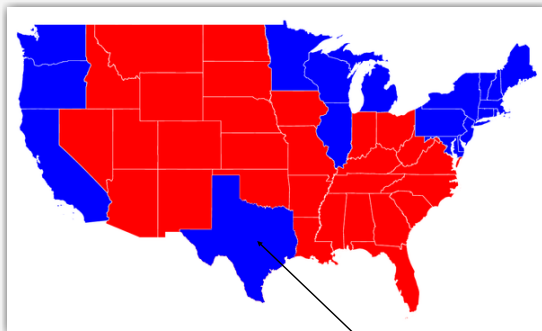


recolor red blob to blue

35

## Graph-processing challenge 2

**Problem.** Find a path from *s* to *t*?

**Assumption.** Any path will do.

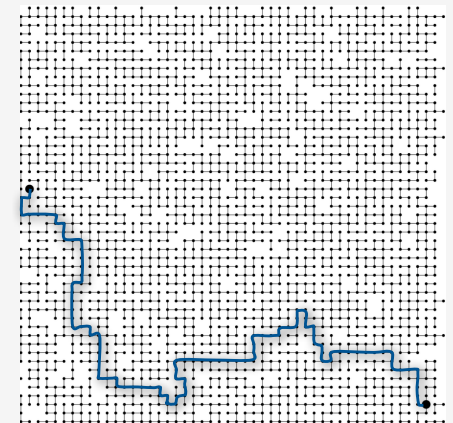

**How difficult?**

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.

36

## Paths in graphs: union find vs. DFS

Is there a path from  $s$  to  $t$ ?

method	preprocessing time	query time	space
union-find	$V + E \log^* V$	$\log^* V$ †	$V$
DFS	$E + V$	1	$E + V$

† amortized

If so, find one.

- Union-find: not much help (run DFS on connected subgraph).
- DFS: easy (stay tuned).

**Union-find advantage.** Can intermix queries and edge insertions.


**DFS advantage.** Can recover path itself in time proportional to its length.

37

## Keeping track of paths with DFS

**DFS tree.** Upon visiting a vertex  $v$  for the first time, remember that you came from  $\text{pred}[v]$  (parent-link representation).

**Retrace path.** To find path between  $s$  and  $v$ , follow  $\text{pred}[]$  back from  $v$ .

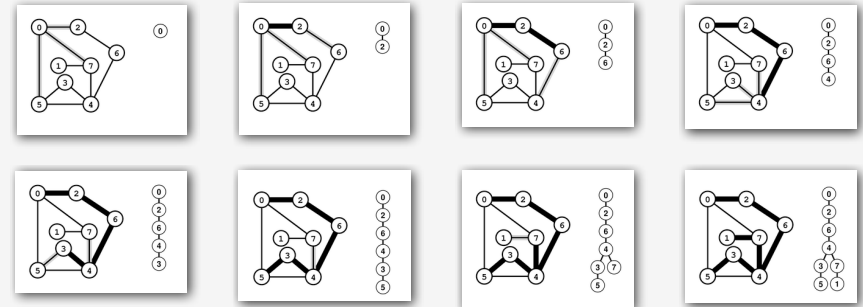

38

## Depth-first-search (pathfinding)

```

public class DFSearcher
{
    private int[] pred;
    ...
    public DFSearcher(Graph G, int s)
    {
        ...
        pred = new int[G.V()];
        for (int v = 0; v < G.V(); v++)
            pred[v] = -1;
        ...
    }
    private void dfs(Graph G, int v)
    {
        marked[v] = true;
        for (int w : G.adj(v))
            if (!marked[w])
            {
                pred[w] = v;
                dfs(G, w);
            }
    }
    public Iterable<Integer> path(int v)
    { /* see next slide */ }
}
    
```

add instance variable for parent-link representation of DFS tree

initialize it in the constructor

set parent link


add method for client to iterate through path

39

## Depth-first-search (pathfinding iterator)

```

public Iterable<Integer> path(int v)
{
    Stack<Integer> path = new Stack<Integer>();
    while (v != -1 && marked[v])
    {
        list.push(v);
        v = pred[v];
    }
    return path;
}
    
```



40

## DFS summary

Enables direct solution of simple graph problems.

- ✓ • Find path from  $s$  to  $t$ .
- Connected components (stay tuned).
- Euler tour (see book).
- Cycle detection (simple exercise).
- Bipartiteness checking (see book).

Basis for solving more difficult graph problems.

- Biconnected components (see book).
- Planarity testing (beyond scope).

41

- graph API
- maze exploration
- depth-first search
- **breadth-first search**
- connected components
- challenge

42

## Breadth-first search

**Depth-first search.** Put unvisited vertices on a **stack**.

**Breadth-first search.** Put unvisited vertices on a **queue**.

**Shortest path.** Find path from  $s$  to  $t$  that uses **fewest number of edges**.

*BFS (from source vertex  $s$ )*

*Put  $s$  onto a FIFO queue.*

*Repeat until the queue is empty:*

- *remove the least recently added vertex  $v$*
- *add each of  $v$ 's unvisited neighbors to the queue, and mark them as visited.*

**Property.** BFS examines vertices in increasing distance from  $s$ .

43

## Breadth-first search scaffolding

```
public class BFSearcher
{
    private int[] dist; ← distances from s

    public BFSearcher(Graph G, int s)
    {
        dist = new int[G.V()];
        for (int v = 0; v < G.V(); v++) ← initialize distances
            dist[v] = G.V() + 1;
        dist[s] = 0;

        bfs(G, s); ← compute distances
    }

    public int distance(int v) ← answer client query
    { return dist[v]; }

    private void bfs(Graph G, int s)
    { /* See next slide */ }
}
```

44


## Breadth-first search (compute shortest-path distances)

```
private void bfs(Graph G, int s)
{
    Queue<Integer> q = new Queue<Integer>();
    q.enqueue(s);
    while (!q.isEmpty())
    {
        int v = q.dequeue();
        for (int w : G.adj(v))
        {
            if (dist[w] > G.V())
            {
                q.enqueue(w);
                dist[w] = dist[v] + 1;
            }
        }
    }
}
```

45

## BFS application

- Facebook.
- Kevin Bacon numbers.
- Fewest number of hops in a communication network.

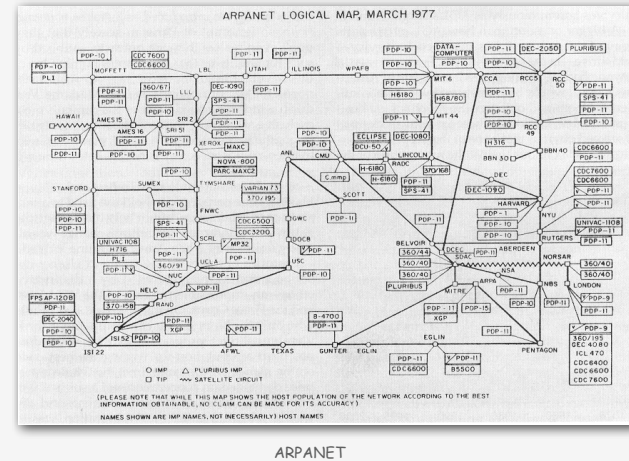

46

- › graph API
- › maze exploration
- › depth-first search
- › breadth-first search
- › **connected components**
- › challenge



47

## Connectivity queries

**Def.** Vertices  $v$  and  $w$  are **connected** if there is a path between them.

**Def.** A connected component is a maximal set of connected vertices.

**Goal.** Preprocess graph to answer queries: is  $v$  connected to  $w$ ? in **constant** time



Vertex	Component
0	0
1	1
2	1
3	0
4	0
5	0
6	2
7	0
8	2
9	1
10	0
11	0
12	1

Union-Find? Not quite.

48

## Connected components

Goal. Partition vertices into connected components.

### Connected components

Initialize all vertices  $v$  as unmarked.

For each unmarked vertex  $v$ , run DFS to identify all vertices discovered as part of the same component.

preprocess time	query time	extra space
$E + V$	1	$V$

49

## Depth-first search for connected components

```
public class CCFinder
{
    private final static int UNMARKED = -1;
    private int components;
    private int[] cc;

    public CCFinder(Graph G)
    { /* see next slide */ }

    public int connected(int v, int w)
    { return cc[v] == cc[w]; }
}
```

component labels

constant-time connectivity query

50

## Depth-first search for connected components

```
public CCFinder(Graph G)
{
    cc = new int[G.V()];
    for (int v = 0; v < G.V(); v++)
        cc[v] = UNMARKED;
    for (int v = 0; v < G.V(); v++)
        if (cc[v] == UNMARKED)
        {
            dfs(G, v);
            components++;
        }
}

private void dfs(Graph G, int v)
{
    cc[v] = components;
    for (int w : G.adj(v))
        if (cc[w] == UNMARKED) dfs(G, w);
}
```

DFS for each component

standard DFS

51


## Connected components



52

### Connected components application: image processing

**Goal.** Read in a 2D color image and find regions of connected pixels that have the same color.

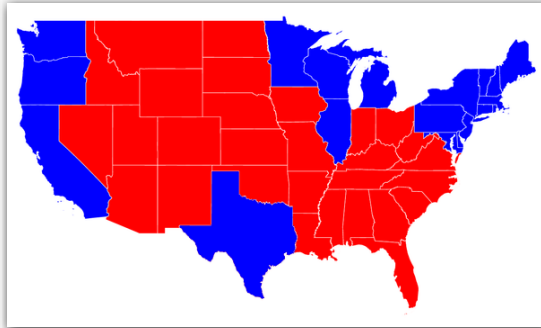

**Input.** Scanned image.

**Output.** Number of red and blue states.

assuming contiguous states

53

### Connected components application: image processing

**Goal.** Read in a 2D color image and find regions of connected pixels that have the same color.

**Efficient algorithm.**

- Create grid graph.
- Connect each pixel to neighboring pixel if same color.
- Find connected components in resulting graph.


0	1	1	1	1	1	6	6	8	9	9	11
0	0	0	1	6	6	6	8	8	11	9	11
3	0	0	1	6	6	4	8	11	11	11	11
3	0	0	1	1	6	2	11	11	11	11	11
10	10	10	10	1	1	2	11	11	11	11	11
7	7	2	2	2	2	2	11	11	11	11	11
7	7	5	5	5	2	2	11	11	11	11	11

54

### Connected components application: particle detection

**Particle detection.** Given grayscale image of particles, identify "blobs."

- Vertex: pixel.
- Edge: between two adjacent pixels with grayscale value  $\geq 70$ .
- Blob: connected component of 20-30 pixels.



black = 0  
white = 255

**Particle tracking.** Track moving particles over time.

55

- › graph API
- › maze exploration
- › depth-first search
- › breadth-first search
- › connected components
- › challenges

56


### Graph-processing challenge 3

**Problem.** Find a cycle that uses every edge.

**Assumption.** Need to use each edge exactly once.

**How difficult?**


- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.



### Bridges of Königsberg

**The Seven Bridges of Königsberg.** [Leonhard Euler 1736]

“... in Königsberg in Prussia, there is an island A, called the Kneiphof; the river which surrounds it is divided into two branches ... and these branches are crossed by seven bridges. Concerning these bridges, it was asked whether anyone could arrange a route in such a way that he could cross each bridge once and only once.”

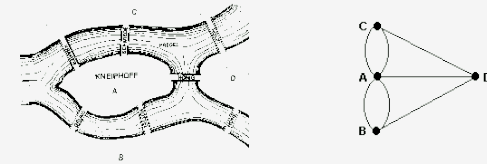

**Euler tour.** Is there a cyclic path that uses each edge exactly once?

**Answer.** Yes iff connected and all vertices have **even** degree.

**To find path.** DFS-based algorithm (see Algs in Java).


### Graph-processing challenge 4

**Problem.** Find a cycle that visits every vertex.

**Assumption.** Need to visit each vertex exactly once.

**How difficult?**

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.




### Graph-processing challenge 5

**Problem.** Are two graphs identical except for vertex names?


**How difficult?**

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.

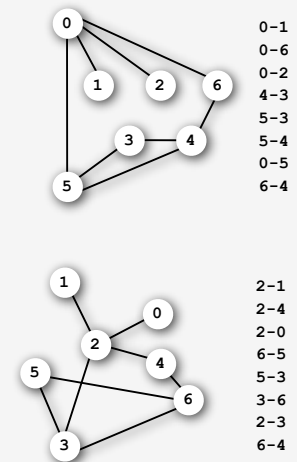

## Graph-processing challenge 6

**Problem.** Lay out a graph in the plane without crossing edges?



**How difficult?**

- Any COS 126 student could do it.
- Need to be a typical diligent COS 226 student.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.