



Scene Graphs & Modeling Transformations

COS 426, Spring 2020

Felix Heide

Princeton University




3D Object Representations

- Points
 - Range image
 - Point cloud
- Surfaces
 - Polygonal mesh
 - Subdivision
 - Parametric
 - Implicit
- Solids
 - Voxels
 - BSP tree
 - CSG
 - Sweep
- High-level structures
 - Scene graph
 - Application specific

3D Object Representations



- What object representation is best for this?

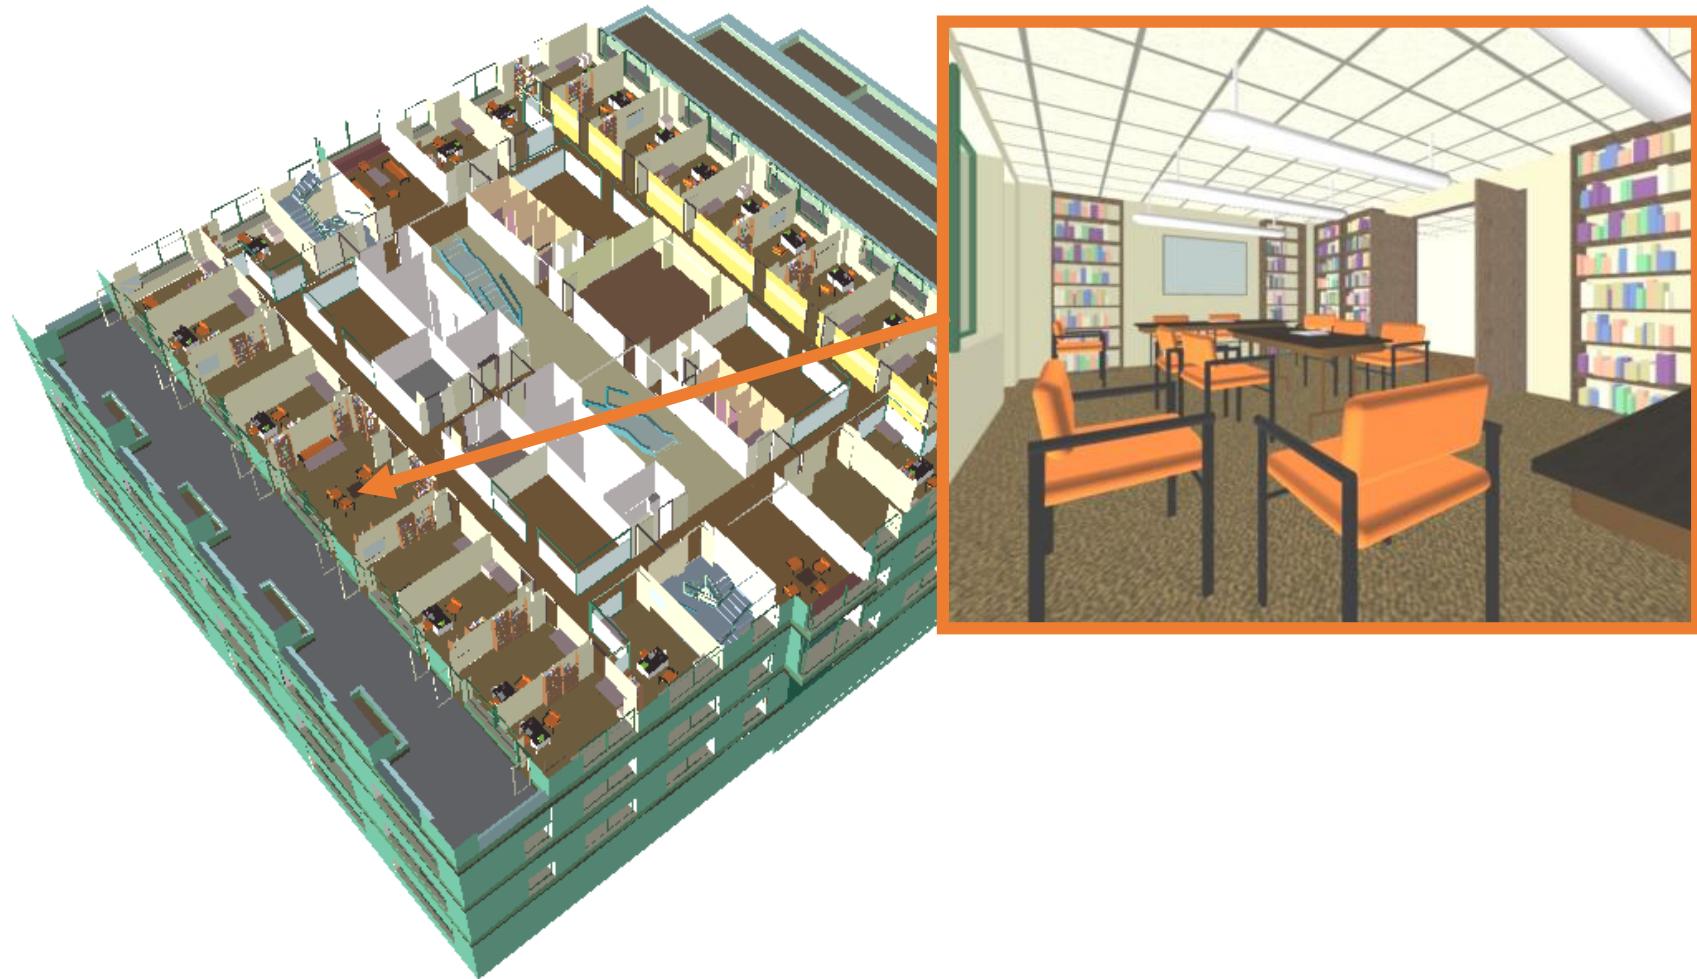



3D Object Representations

- Desirable properties of an object representation
 - Easy to acquire
 - Accurate
 - Concise
 - Intuitive editing
 - Efficient editing
 - Efficient display
 - Efficient intersections
 - Guaranteed validity
 - Guaranteed smoothness
 - etc.

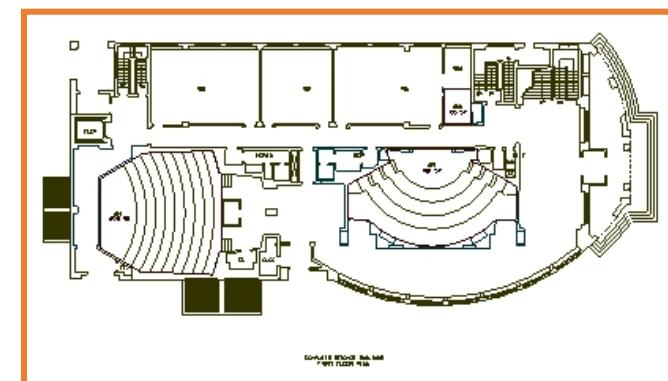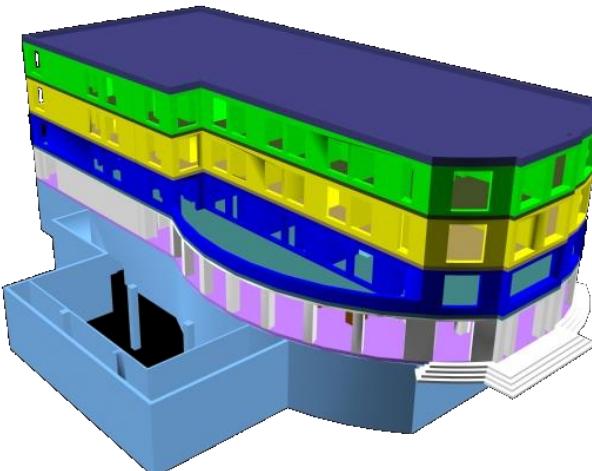

(CS Building, Princeton University)




Overview

- Scene graphs
 - Geometry & attributes
 - Transformations
 - Bounding volumes
- Transformations
 - Basic 2D transformations
 - Matrix representation
 - Matrix composition
 - 3D transformations





Scene Graphs

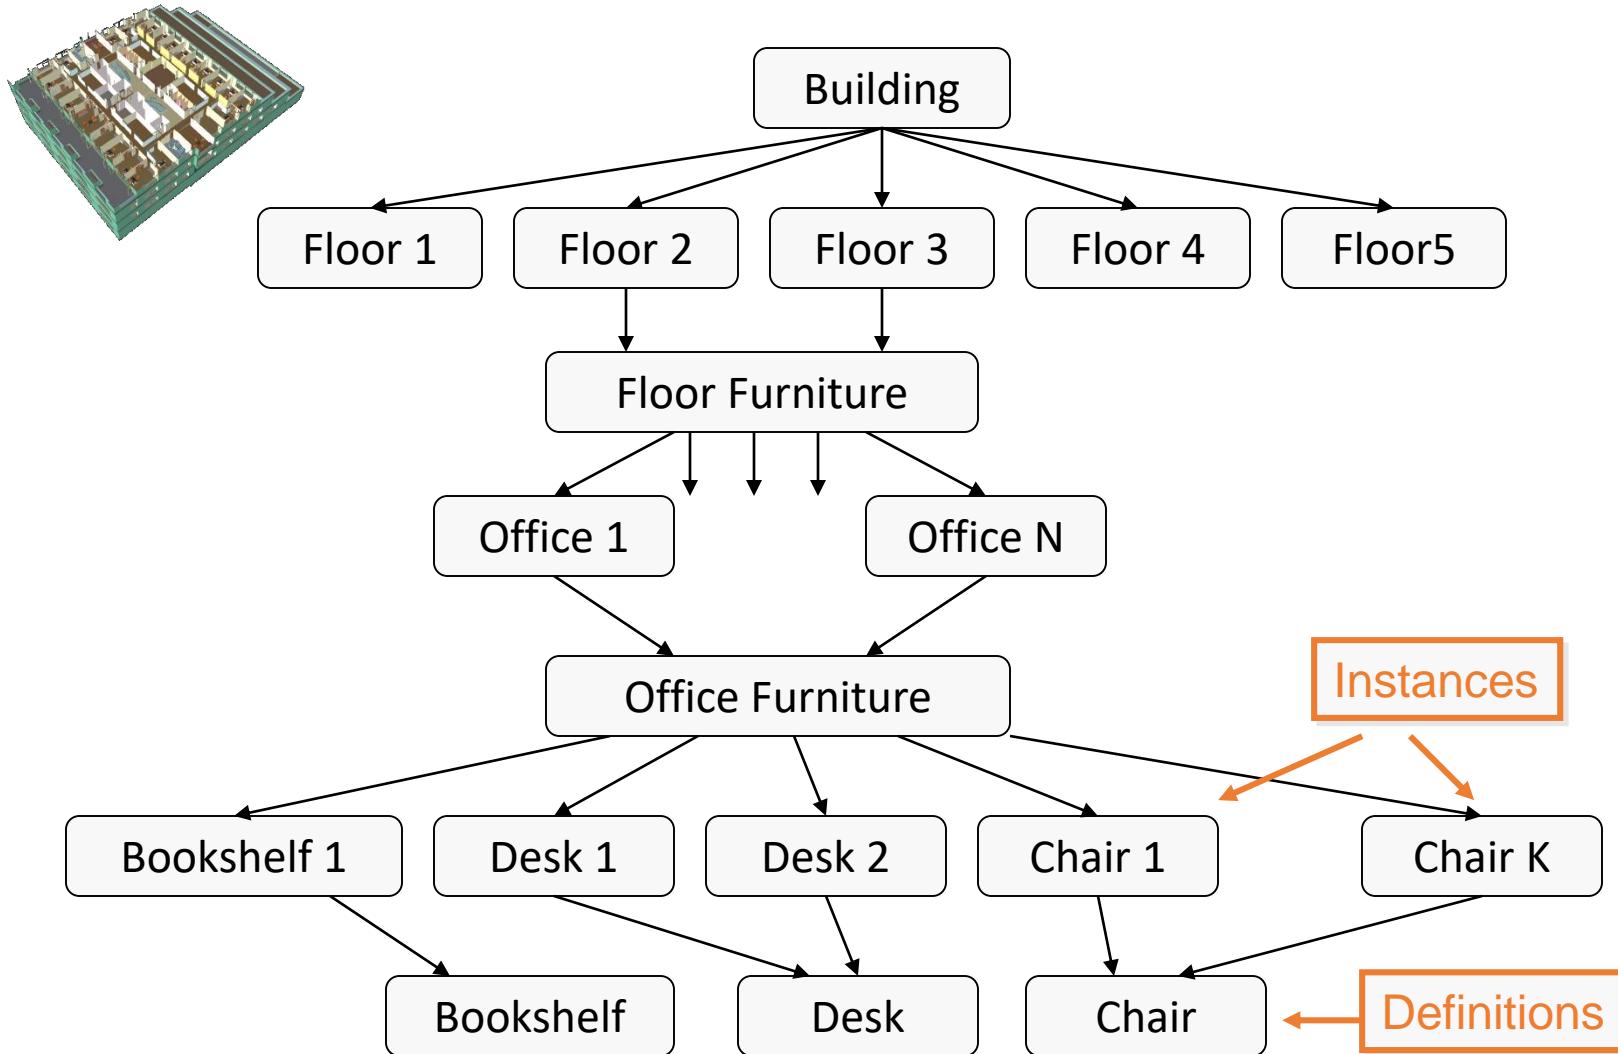

Scene Graphs


- Hierarchy (DAG) of nodes, where each may have:
 - Geometry representation
 - Modeling transformation
 - Parents and/or children
 - Bounding volume

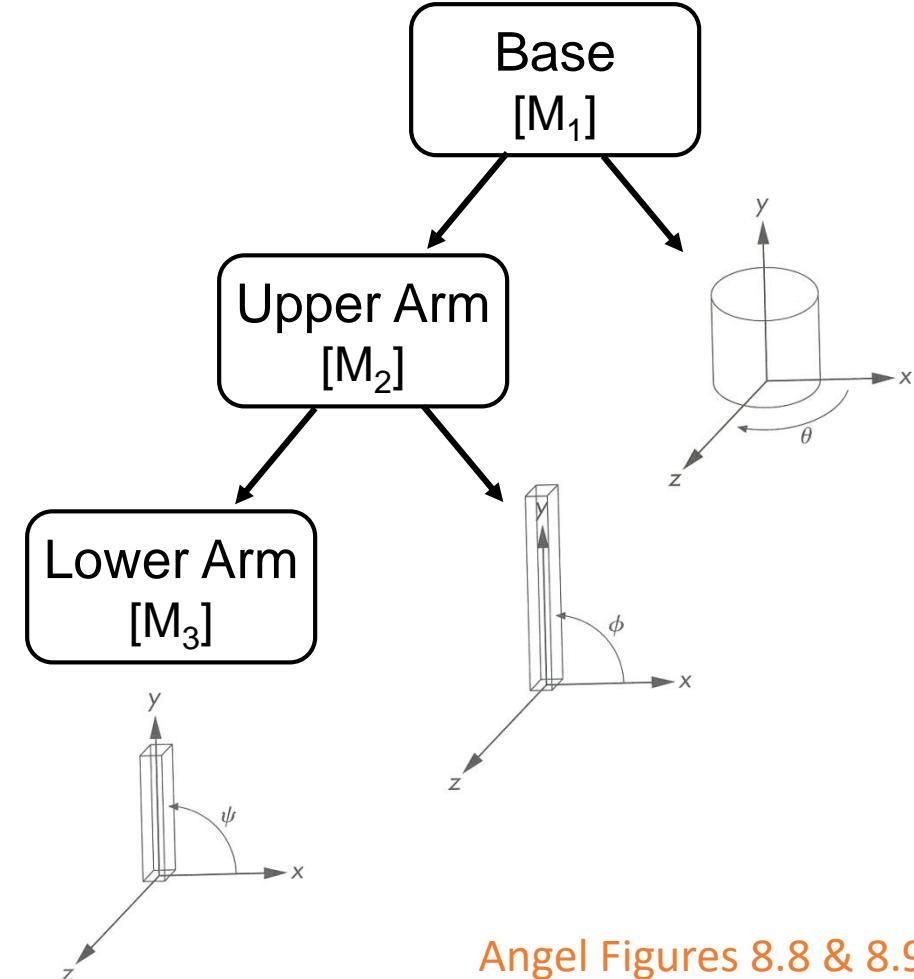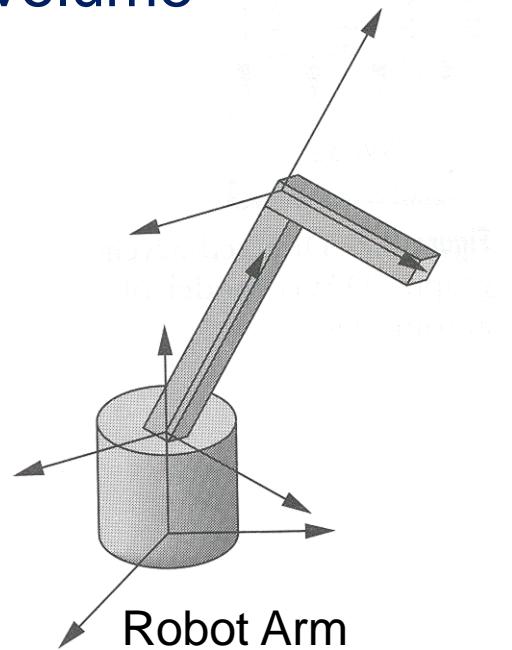

Angel Figures 8.8 & 8.9



Scene Graphs

- Advantages
 - Allows definitions of objects in own coordinate systems

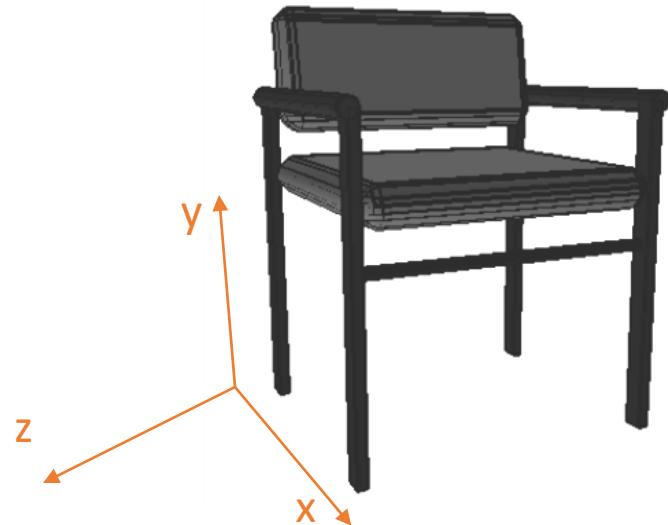



Scene Graphs

- Advantages
 - Allows definitions of objects in own coordinate systems
 - Allows use of object definition multiple times in a scene

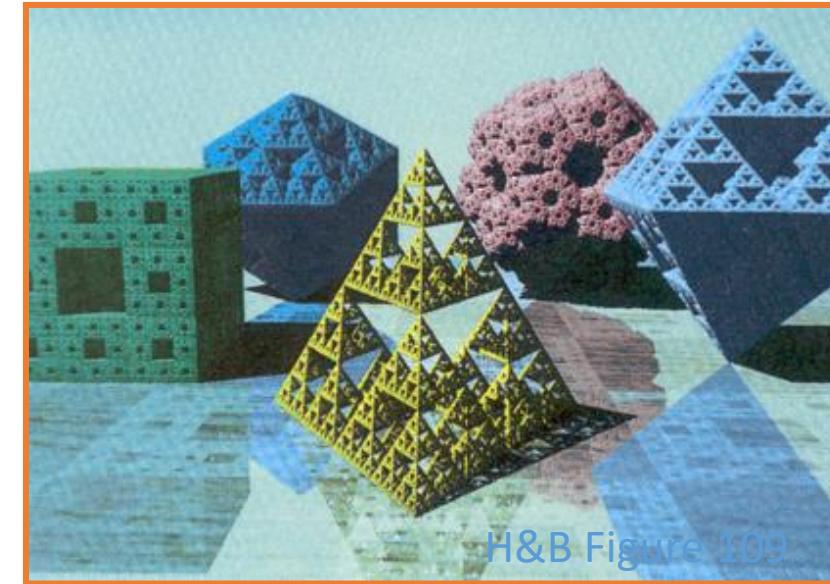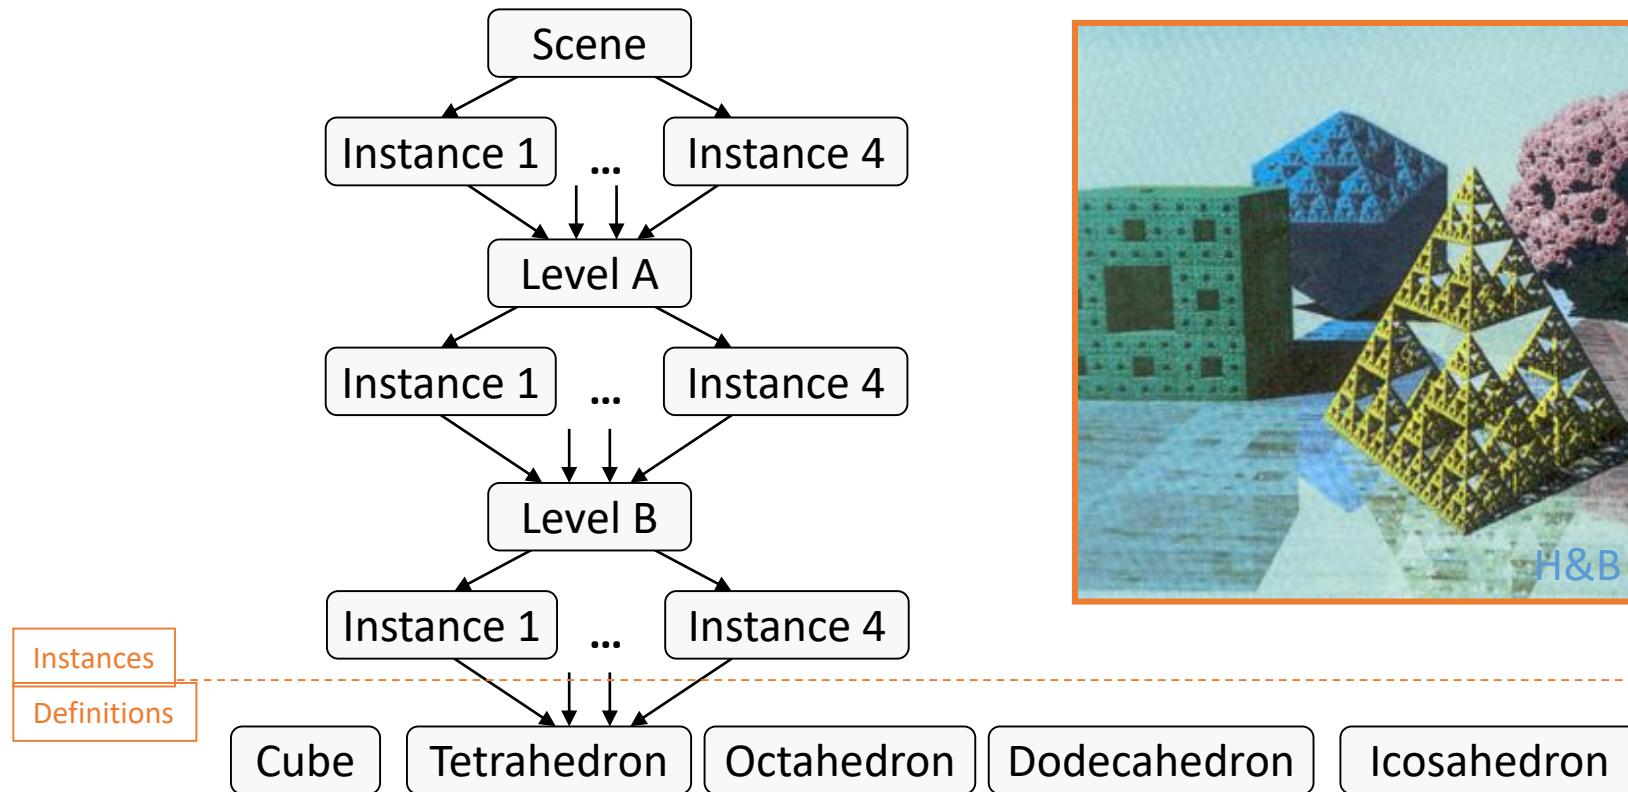



Scene Graphs

- Advantages
 - Allows definitions of objects in own coordinate systems
 - Allows use of object definition multiple times in a scene
 - Allows hierarchical processing (e.g., intersections)

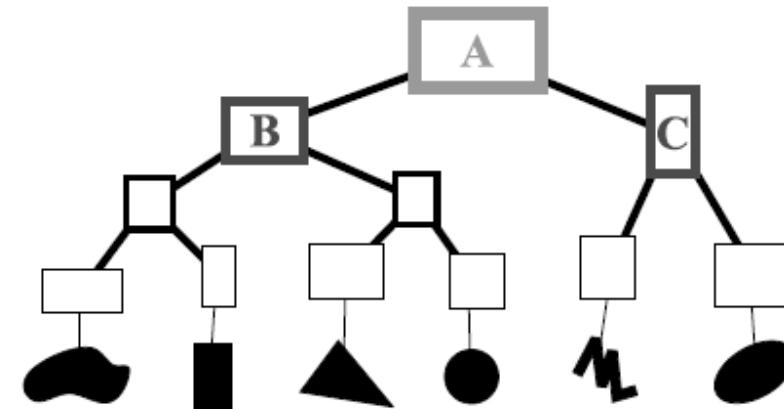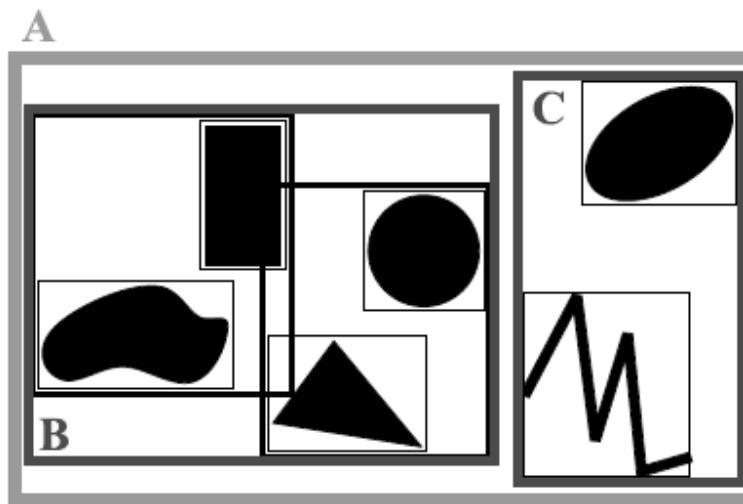

Scene Graphs

- Advantages
 - Allows definitions of objects in own coordinate systems
 - Allows use of object definition multiple times in a scene
 - Allows hierarchical processing (e.g., intersections)
 - Allows articulated animation

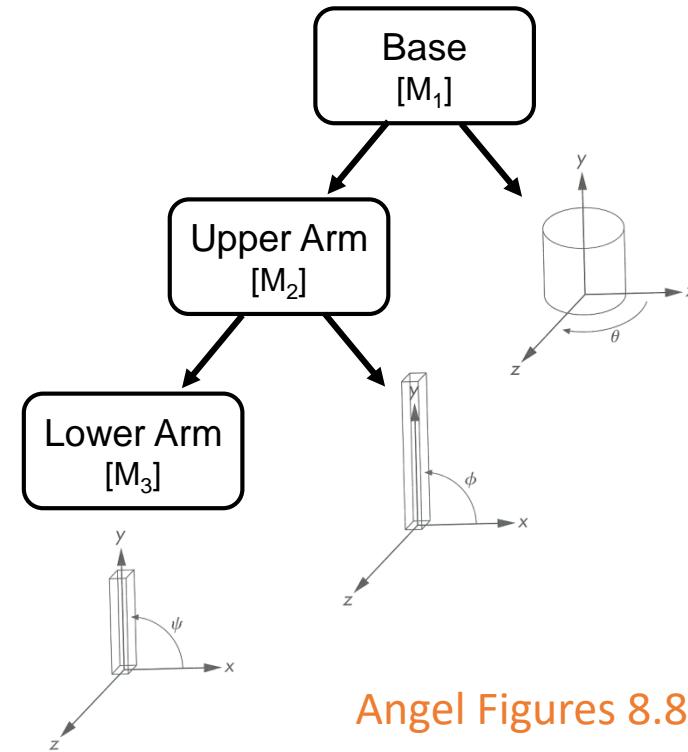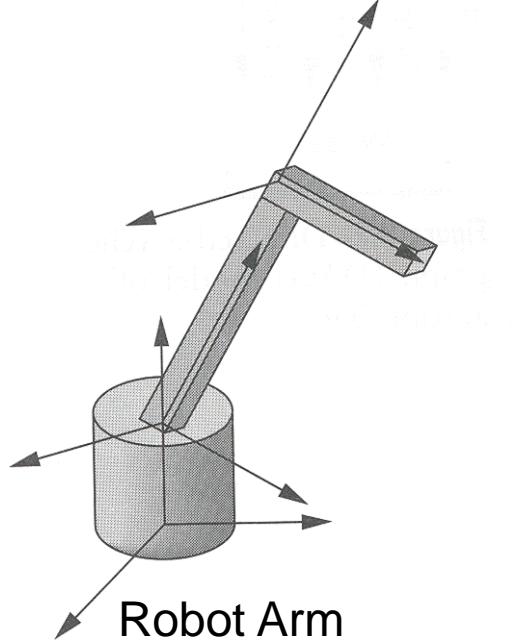

Angel Figures 8.8 & 8.9



Scene Graph Example



Pixar




Overview

- Scene graphs
 - Geometry & attributes
 - Transformations
 - Bounding volumes
- Transformations
 - Basic 2D transformations
 - Matrix representation
 - Matrix composition
 - 3D transformations




2D Modeling Transformations

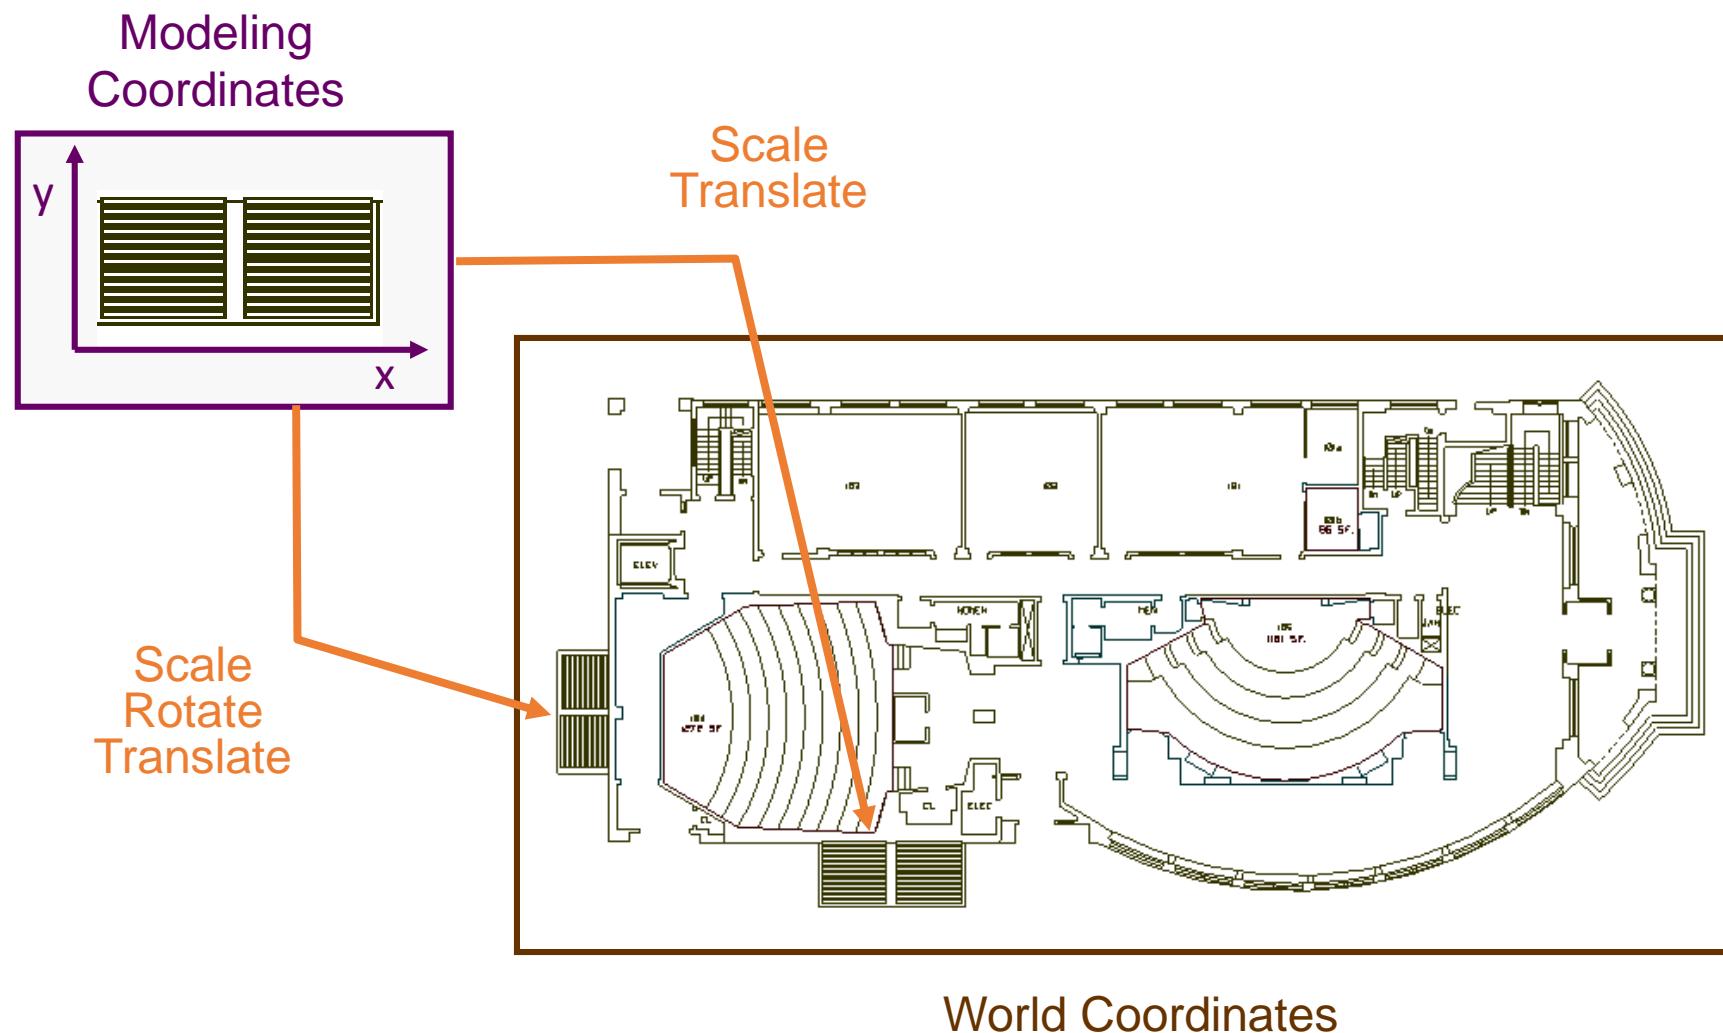





2D Modeling Transformations

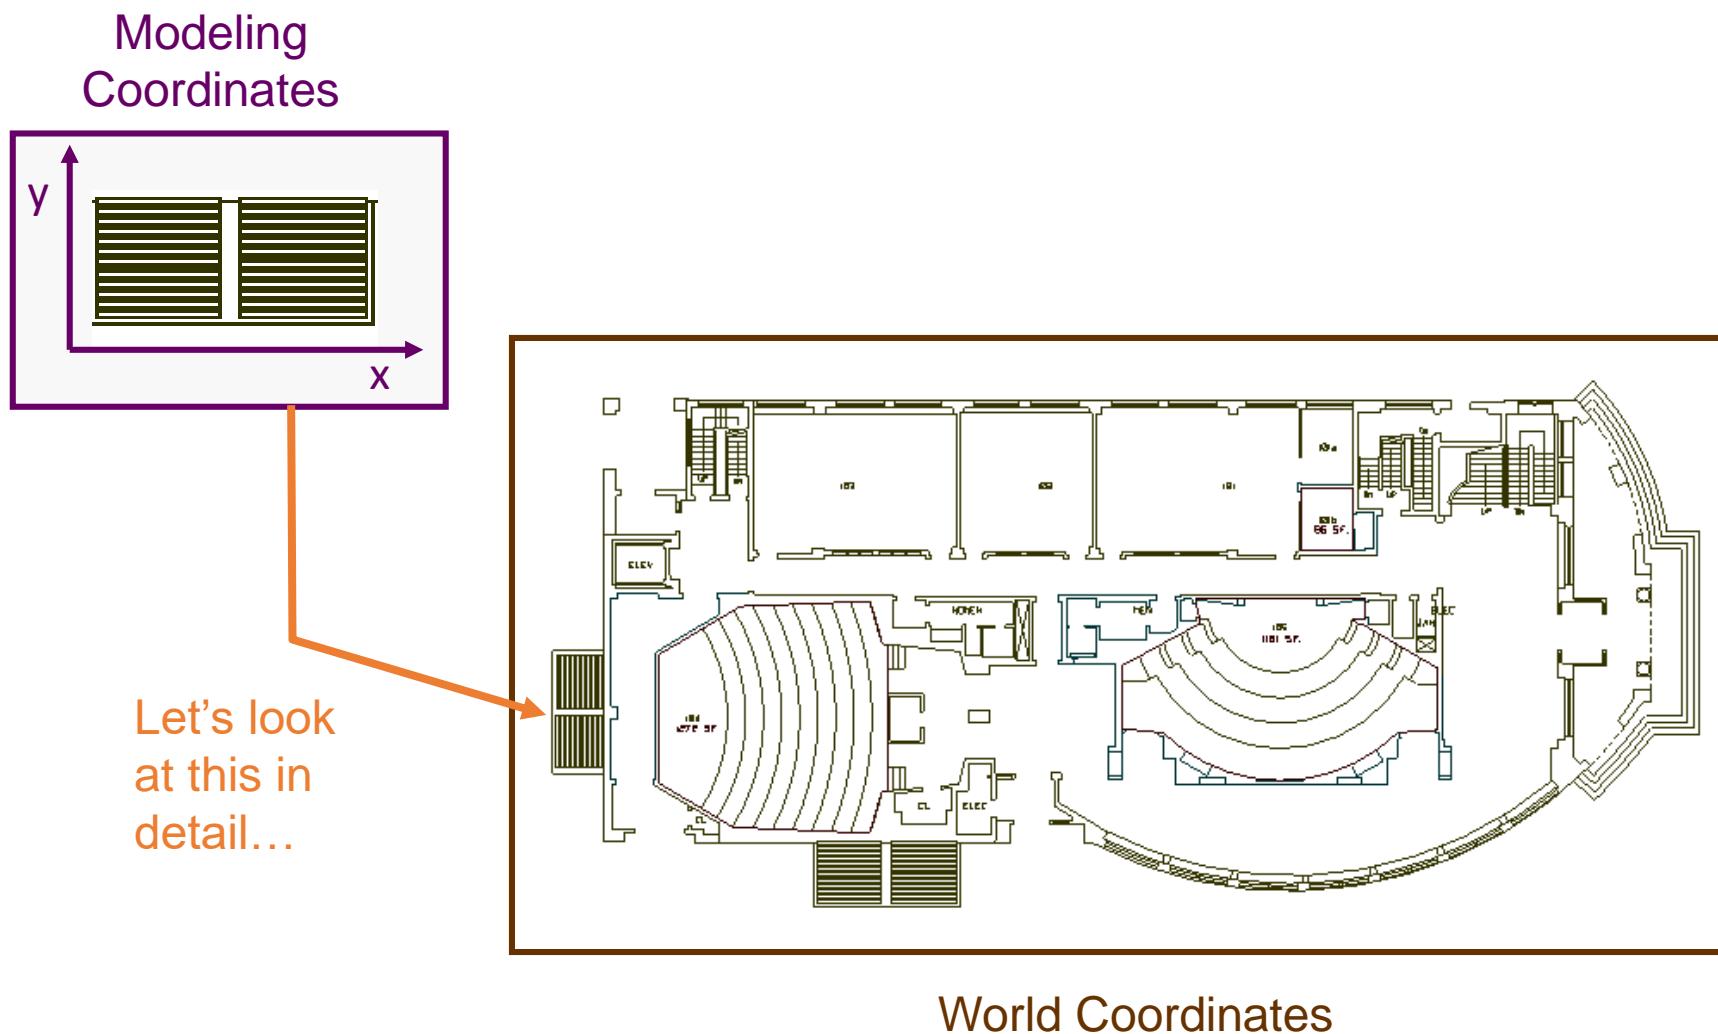




2D Modeling Transformations

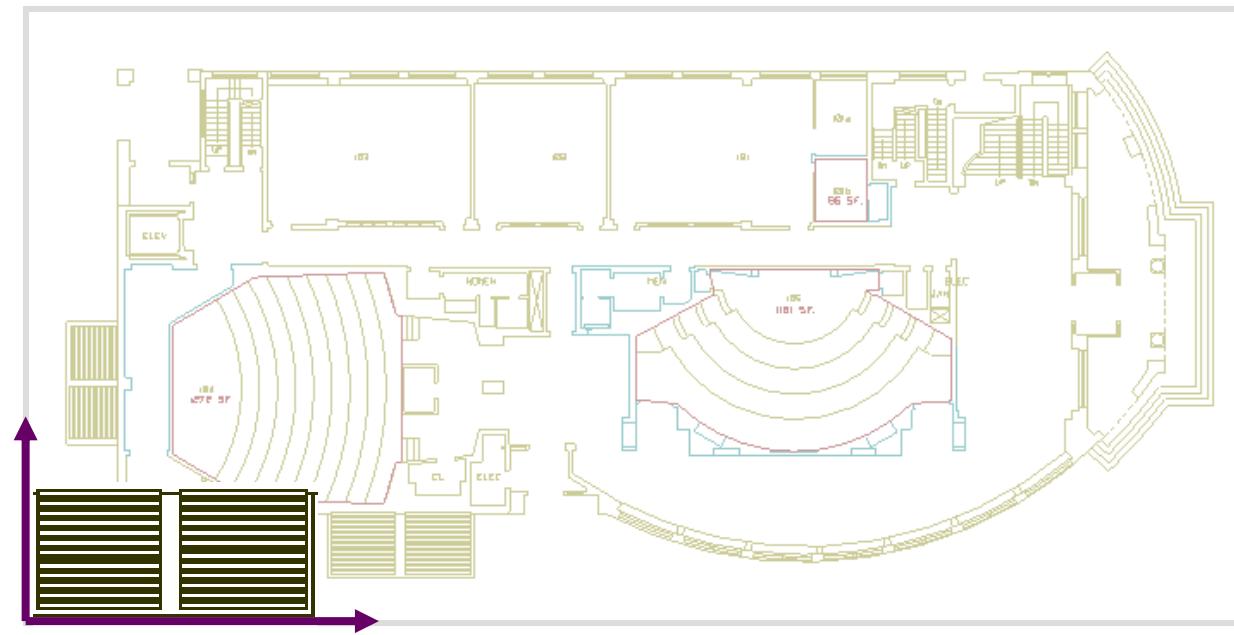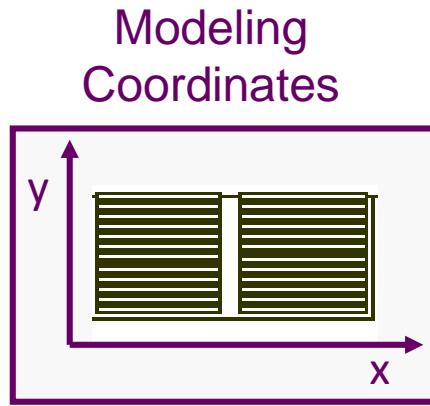




2D Modeling Transformations

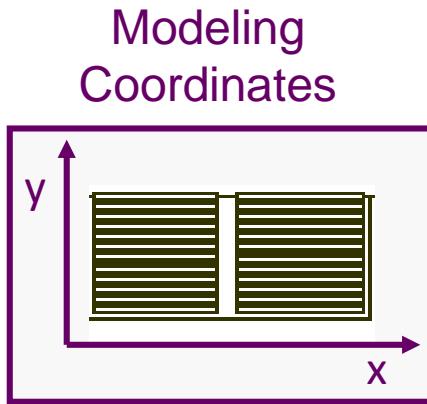


Scale .3, .3

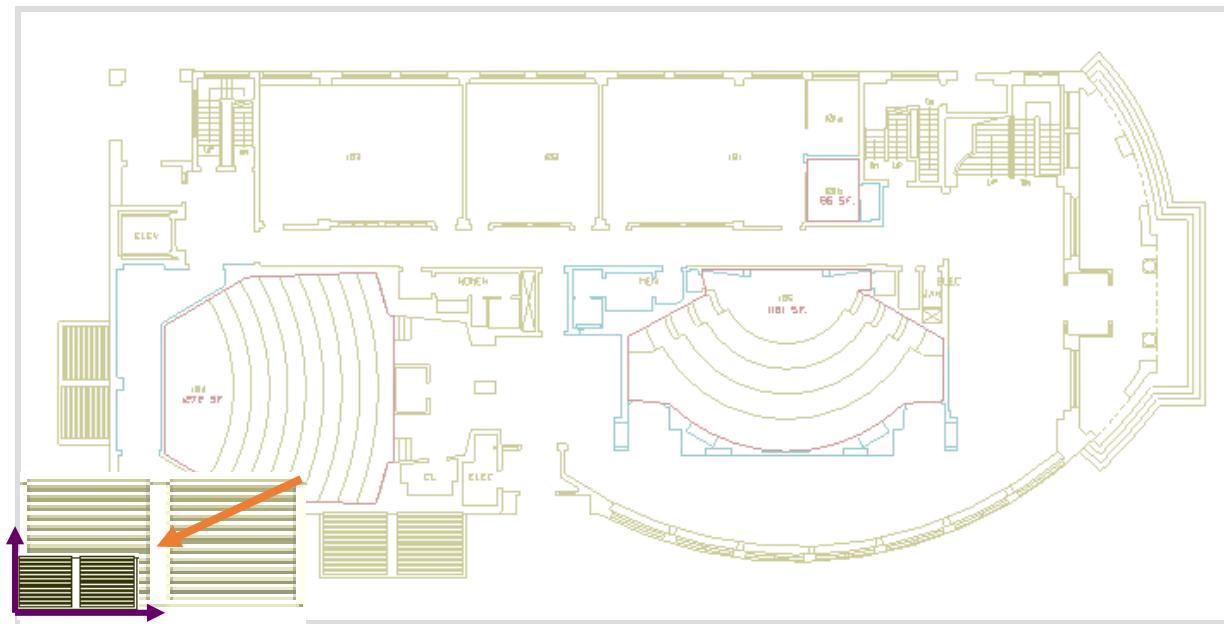




2D Modeling Transformations

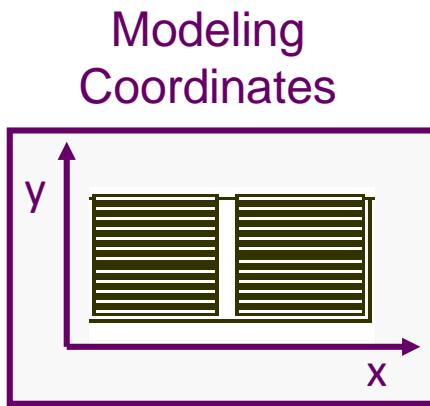


Scale .3, .3
Rotate -90

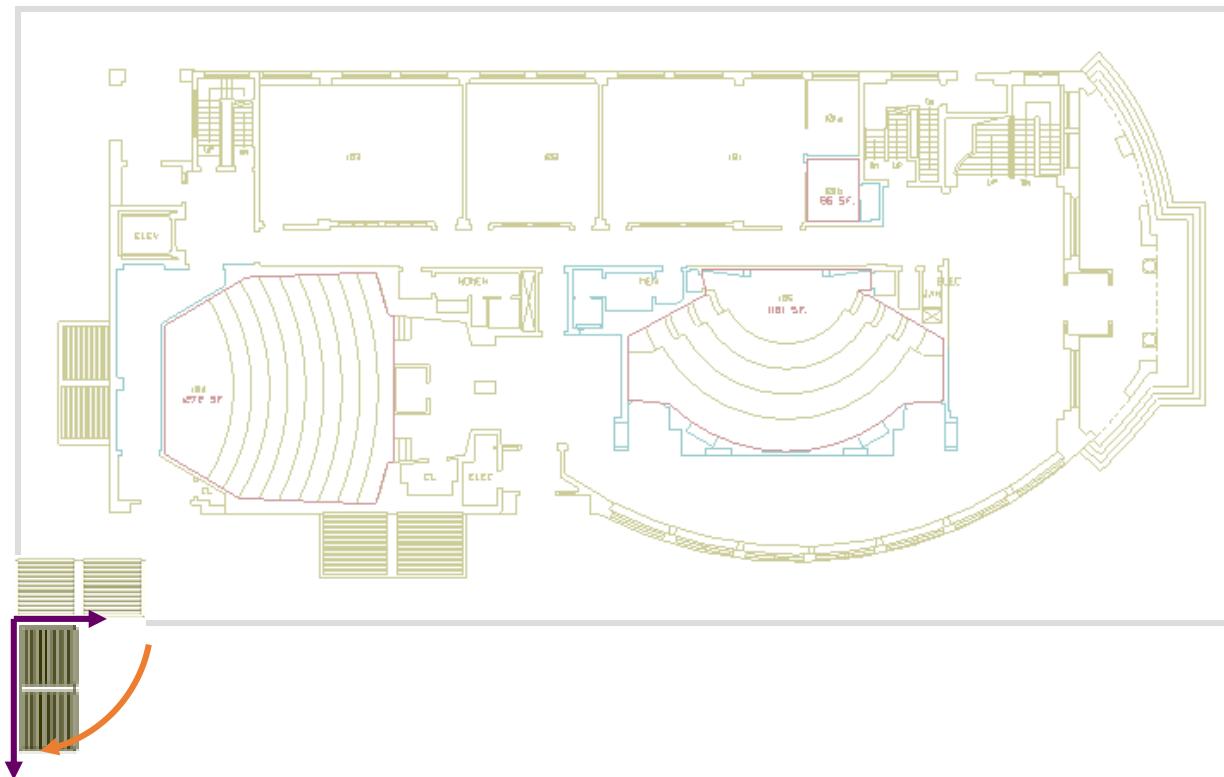




2D Modeling Transformations

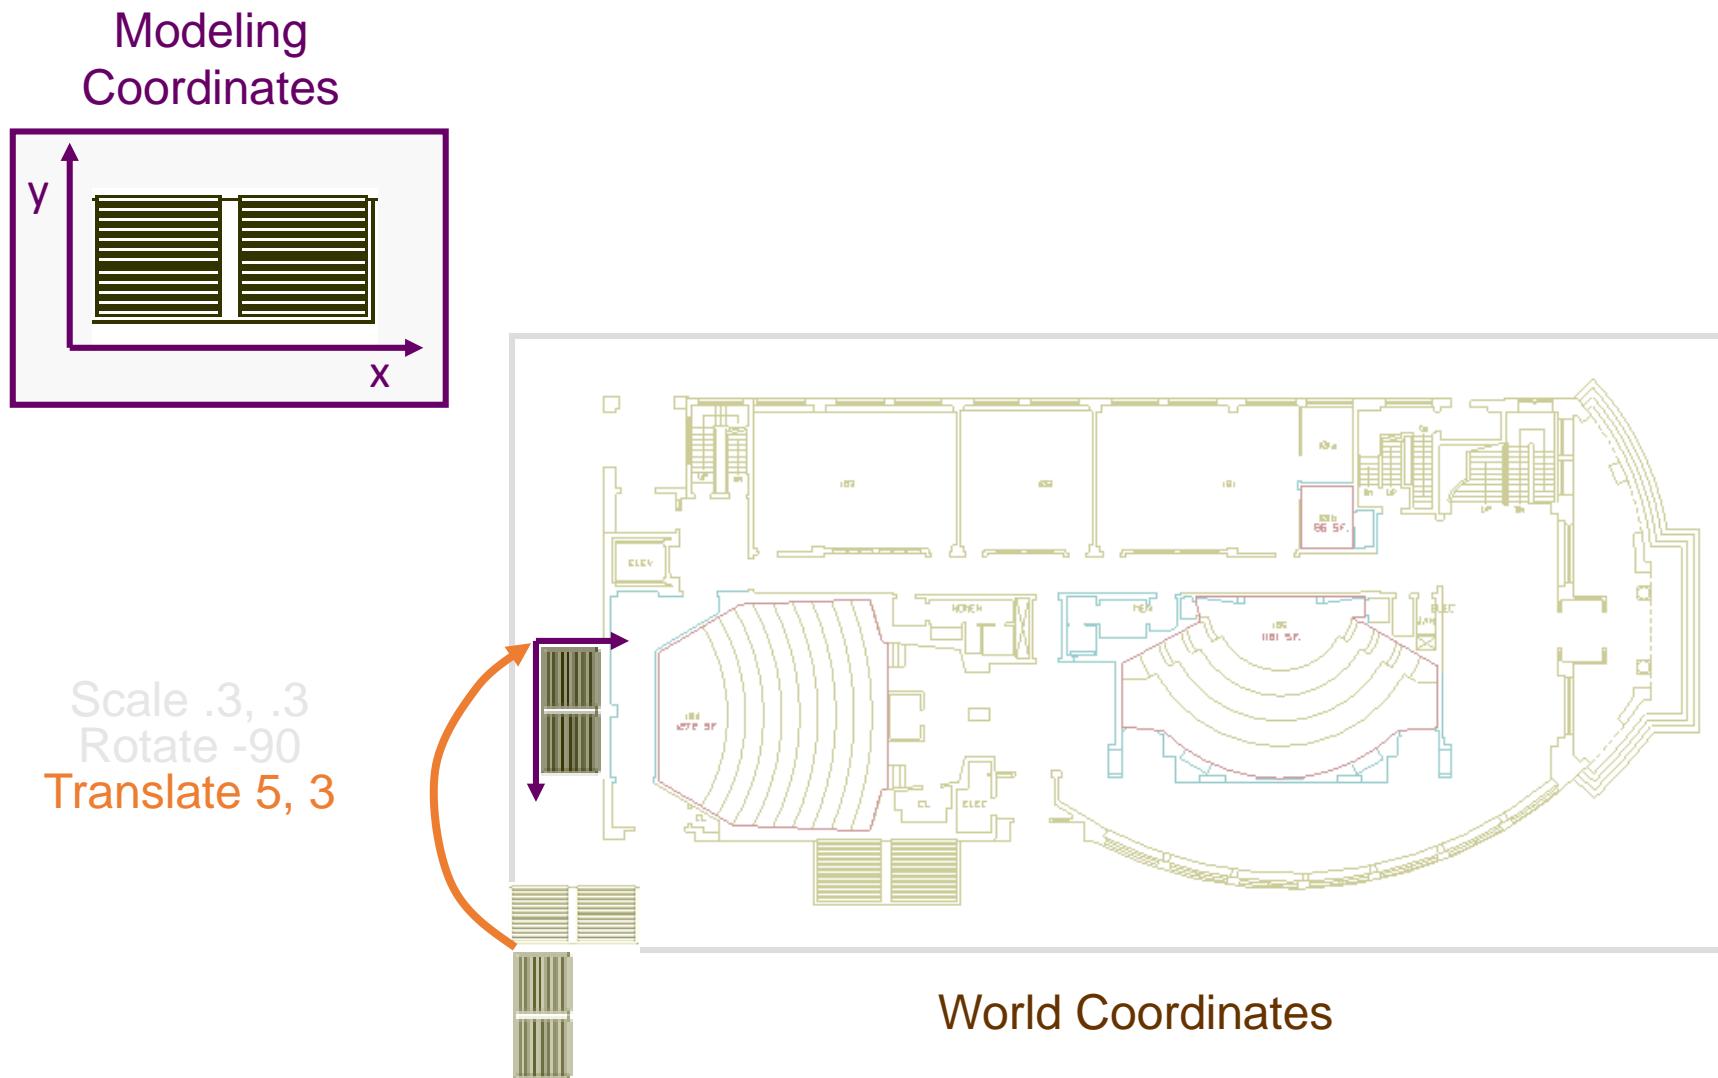



Basic 2D Transformations

- Translation:
 - $x' = x + tx$
 - $y' = y + ty$
- Scale:
 - $x' = x * sx$
 - $y' = y * sy$
- Shear:
 - $x' = x + hx*y$
 - $y' = y + hy*x$
- Rotation:
 - $x' = x*\cos\Theta - y*\sin\Theta$
 - $y' = x*\sin\Theta + y*\cos\Theta$

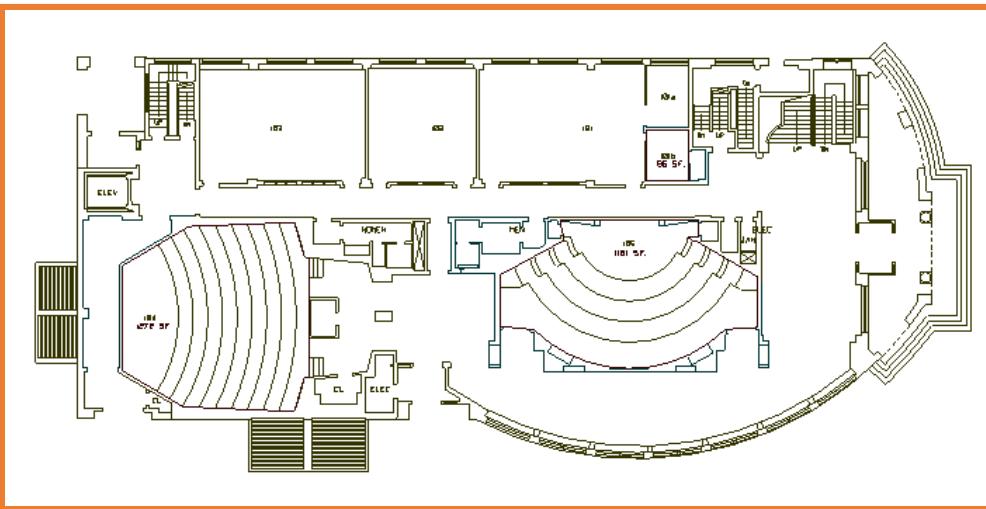


Transformations
can be combined
(with simple algebra)



Basic 2D Transformations

- Translation:
 - $x' = x + tx$
 - $y' = y + ty$
- Scale:
 - $x' = x * sx$
 - $y' = y * sy$
- Shear:
 - $x' = x + hx*y$
 - $y' = y + hy*x$
- Rotation:
 - $x' = x*\cos\Theta - y*\sin\Theta$
 - $y' = x*\sin\Theta + y*\cos\Theta$

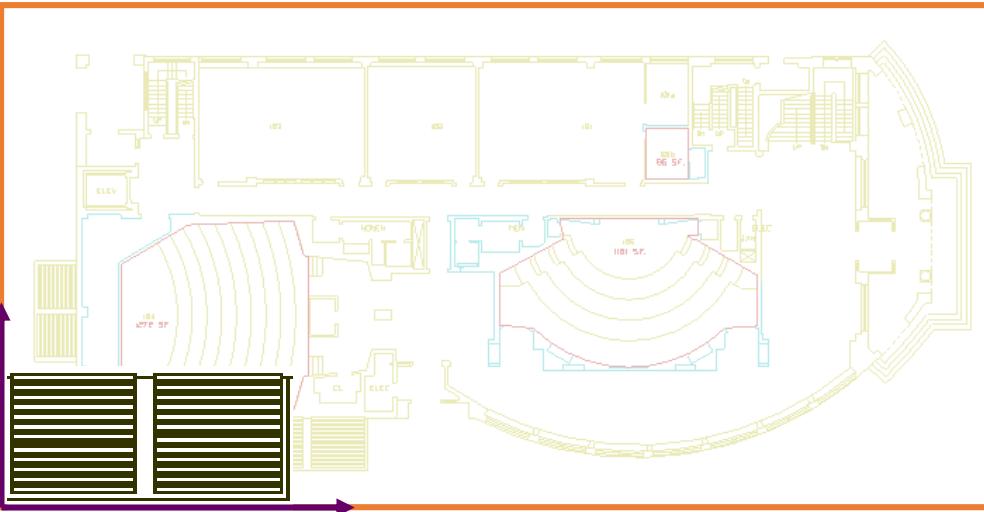



Basic 2D Transformations

- Translation:

- $x' = x + tx$
- $y' = y + ty$

- Scale:


- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

- Rotation:

- $x' = x*\cos\Theta - y*\sin\Theta$
- $y' = x*\sin\Theta + y*\cos\Theta$

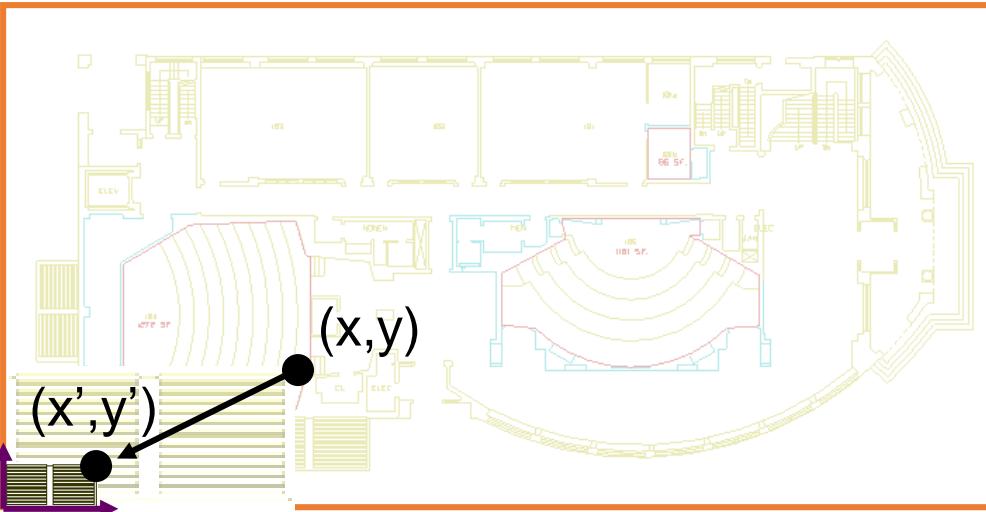

$$\begin{aligned}x' &= x^*sx \\y' &= y^*sy\end{aligned}$$



Basic 2D Transformations

- Translation:

- $x' = x + tx$
- $y' = y + ty$

- Scale:


- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

- Rotation:

- $x' = x*\cos\Theta - y*\sin\Theta$
- $y' = x*\sin\Theta + y*\cos\Theta$

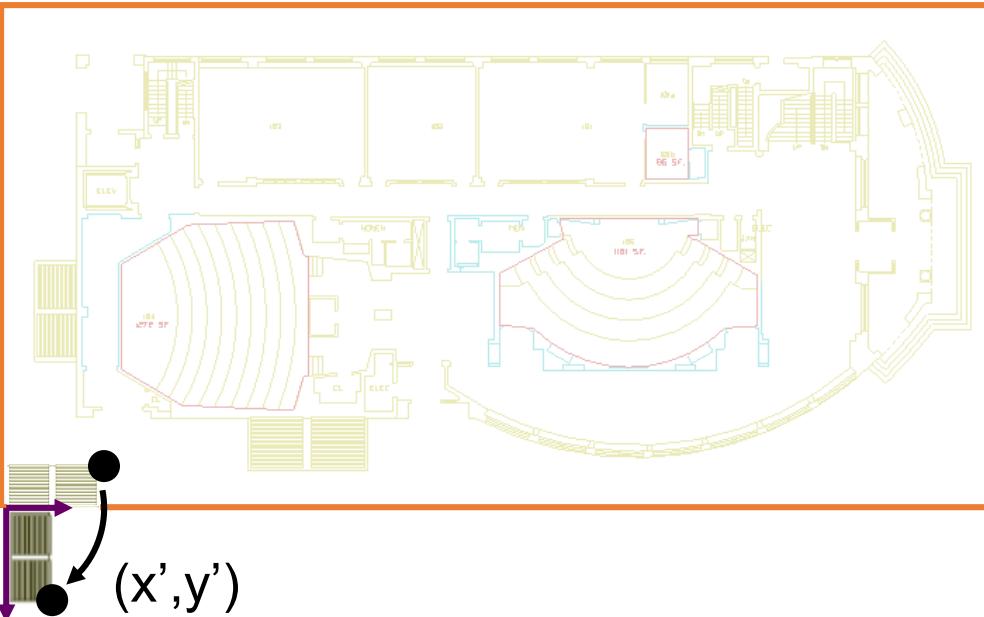

$$x' = (x*sx)*\cos\Theta - (y*sy)*\sin\Theta$$

$$y' = (x*sx)*\sin\Theta + (y*sy)*\cos\Theta$$



Basic 2D Transformations

- Translation:

- $x' = x + tx$
- $y' = y + ty$

- Scale:


- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

- Rotation:

- $x' = x*\cos\Theta - y*\sin\Theta$
- $y' = x*\sin\Theta + y*\cos\Theta$

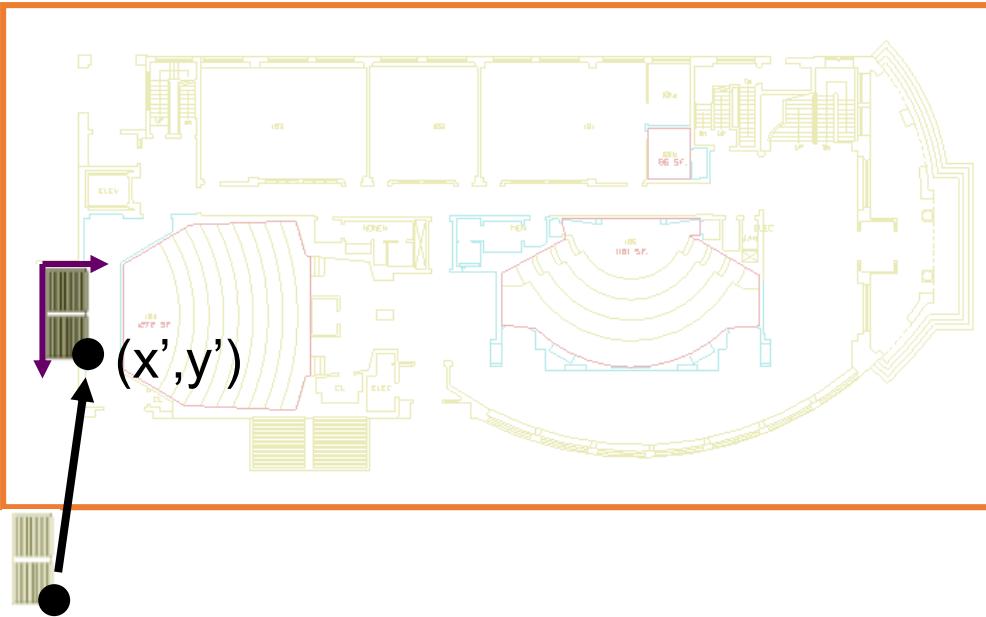

$$x' = ((x*sx)*\cos\Theta - (y*sy)*\sin\Theta) + tx$$
$$y' = ((x*sx)*\sin\Theta + (y*sy)*\cos\Theta) + ty$$



Basic 2D Transformations

- Translation:

- $x' = x + tx$
- $y' = y + ty$

- Scale:


- $x' = x * sx$
- $y' = y * sy$

- Shear:

- $x' = x + hx*y$
- $y' = y + hy*x$

- Rotation:

- $x' = x*\cos\Theta - y*\sin\Theta$
- $y' = x*\sin\Theta + y*\cos\Theta$

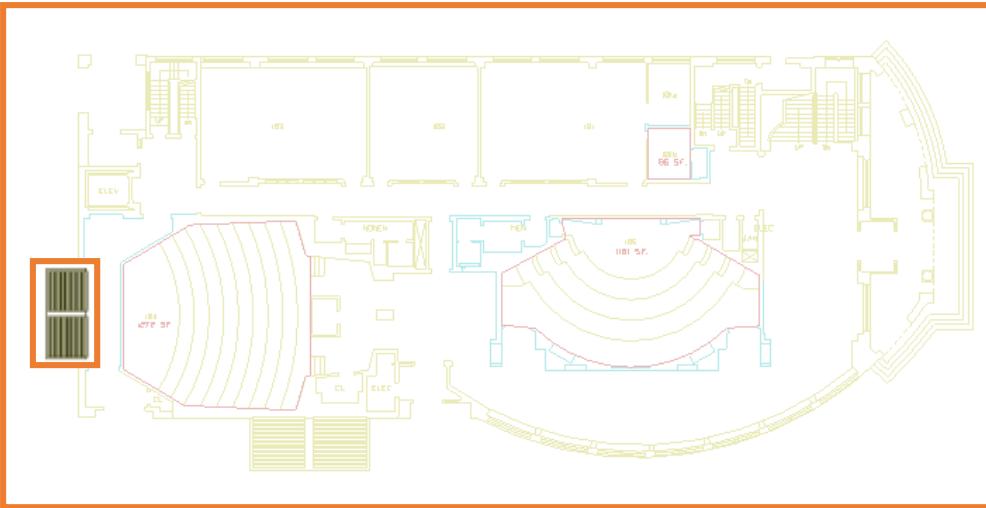

$$x' = ((x*sx)*\cos\Theta - (y*sy)*\sin\Theta) + tx$$
$$y' = ((x*sx)*\sin\Theta + (y*sy)*\cos\Theta) + ty$$



Overview

- Scene graphs
 - Geometry & attributes
 - Transformations
 - Bounding volumes
- Transformations
 - Basic 2D transformations
 - Matrix representation
 - Matrix composition
 - 3D transformations



Matrix Representation

- Represent 2D transformation by a matrix

$$\begin{bmatrix} a & b \\ c & d \end{bmatrix}$$

- Multiply matrix by column vector
↔ apply transformation to point

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ c & d \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} \quad \begin{aligned} x' &= ax + by \\ y' &= cx + dy \end{aligned}$$



Matrix Representation

- Transformations combined by multiplication

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ c & d \end{bmatrix} \begin{bmatrix} e & f \\ g & h \end{bmatrix} \begin{bmatrix} i & j \\ k & l \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

Matrices are a convenient and efficient way to represent a sequence of transformations



2x2 Matrices

- What types of transformations can be represented with a 2x2 matrix?

2D Identity?

$$x' = x$$

$$y' = y$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

2D Scale around (0,0)?

$$x' = sx * x$$

$$y' = sy * y$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} sx & 0 \\ 0 & sy \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$



2x2 Matrices

- What types of transformations can be represented with a 2x2 matrix?


2D Rotate around (0,0)?

$$\begin{aligned}x' &= \cos \Theta * x - \sin \Theta * y \\y' &= \sin \Theta * x + \cos \Theta * y\end{aligned}$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} \cos \Theta & -\sin \Theta \\ \sin \Theta & \cos \Theta \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

2D Shear?

$$\begin{aligned}x' &= x + shx * y \\y' &= shy * x + y\end{aligned}$$

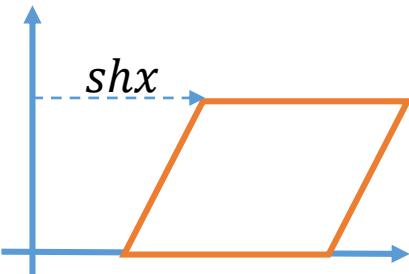

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} 1 & shx \\ shy & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$



2x2 Matrices

- What types of transformations can be represented with a 2x2 matrix?

2D Mirror over Y axis?

$$\begin{aligned}x' &= -x \\y' &= y\end{aligned}$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} -1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

2D Mirror over (0,0)?

$$\begin{aligned}x' &= -x \\y' &= -y\end{aligned}$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} -1 & 0 \\ 0 & -1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$



2x2 Matrices

- What types of transformations can be represented with a 2x2 matrix?

2D Translation?

$$x' = x + tx$$

$$y' = y + ty$$

NO.

Only *linear* 2D transformations
can be represented with a 2x2 matrix



Linear Transformations

- 2D linear transformations are combinations of ...
 - Scale,
 - Rotation,
 - Shear, and
 - Mirror
- Properties of linear transformations:
 - Satisfies: $T(s_1\mathbf{p}_1 + s_2\mathbf{p}_2) = s_1T(\mathbf{p}_1) + s_2T(\mathbf{p}_2)$
 - Origin maps to origin
 - Points at infinity stay at infinity
 - Lines map to lines
 - Parallel lines remain parallel
 - Ratios are preserved
 - Closed under composition

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ c & d \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$



2D Translation

- 2D translation represented by a 3x3 matrix
 - Point represented with *homogeneous coordinates*

$$\begin{aligned}x' &= x + tx \\y' &= y + ty\end{aligned}$$




$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & tx \\ 0 & 1 & ty \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$



Homogeneous Coordinates

- Add a 3rd coordinate to every 2D point
 - (x, y, w) represents a point at location $(x/w, y/w)$
 - $(x, y, 0)$ represents a point at infinity
 - $(x, 0, 0)$ and $(0, y, 0)$ are not allowed

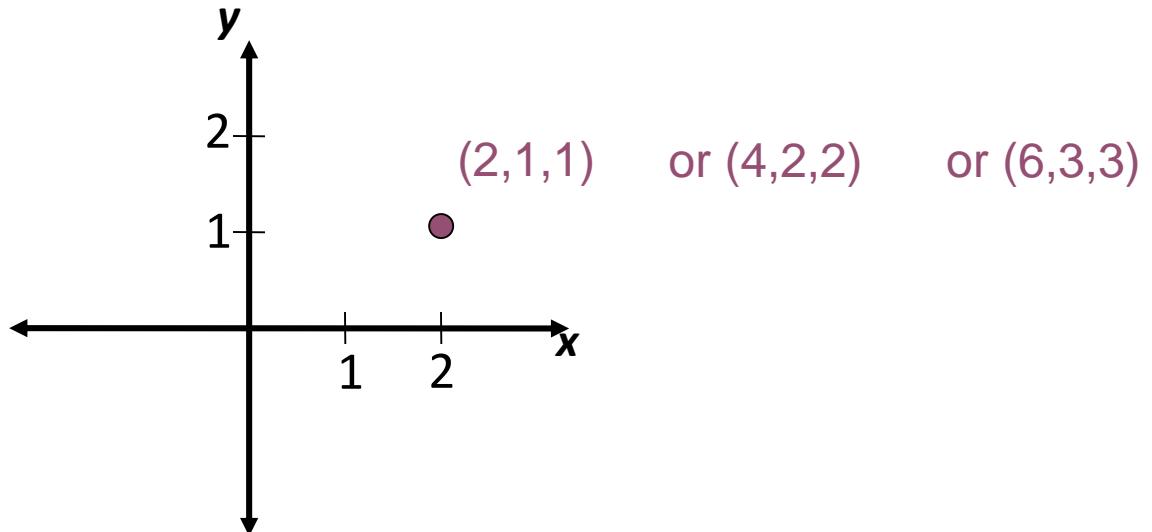

Convenient coordinate system to
represent many useful transformations



Basic 2D Transformations

- Basic 2D transformations as 3x3 matrices

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & tx \\ 0 & 1 & ty \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Translate

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} sx & 0 & 0 \\ 0 & sy & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Scale

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} \cos \Theta & -\sin \Theta & 0 \\ \sin \Theta & \cos \Theta & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Rotate

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & shx & 0 \\ shy & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Shear



Affine Transformations

- Affine transformations are combinations of ...
 - Linear transformations, and
 - Translations





$$\begin{bmatrix} x' \\ y' \\ w \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

- Properties of affine transformations:
 - Origin does not necessarily map to origin
 - Points at infinity remain at infinity
 - Lines map to lines
 - Parallel lines remain parallel
 - Ratios are preserved
 - Closed under composition





Projective Transformations

- The world is in 3D, the screen is flat. How to *Project*?

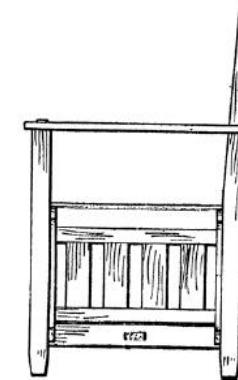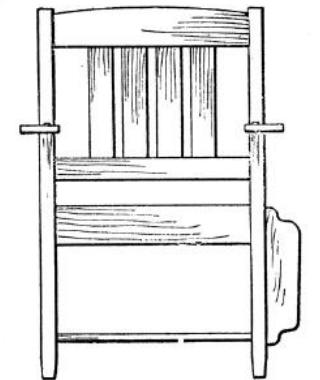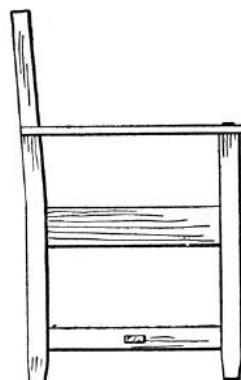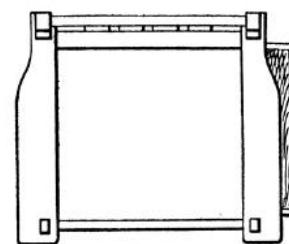


Projective Transformations

- Drop one axis?

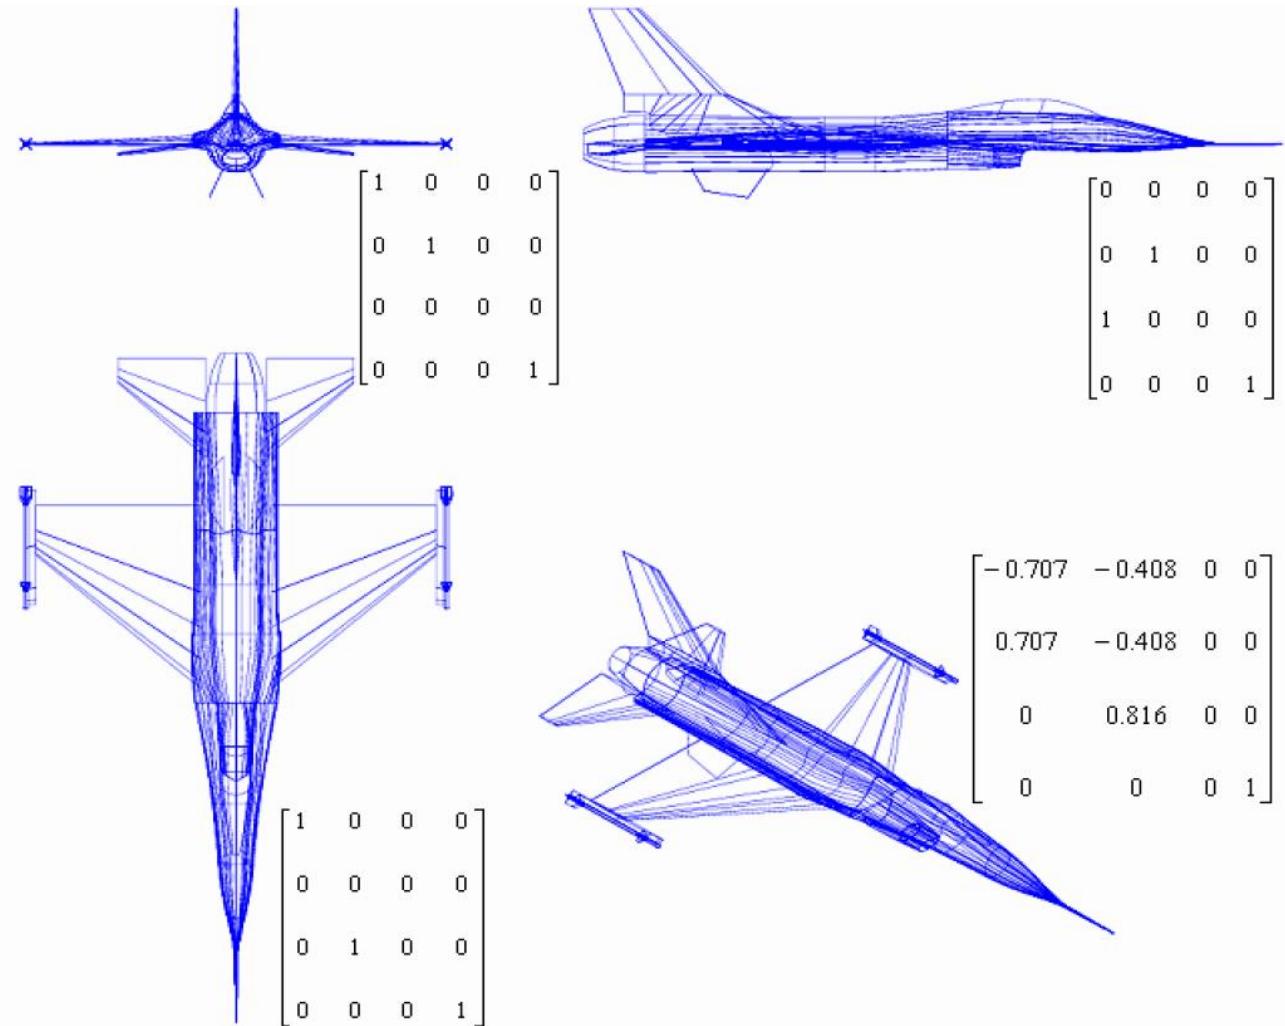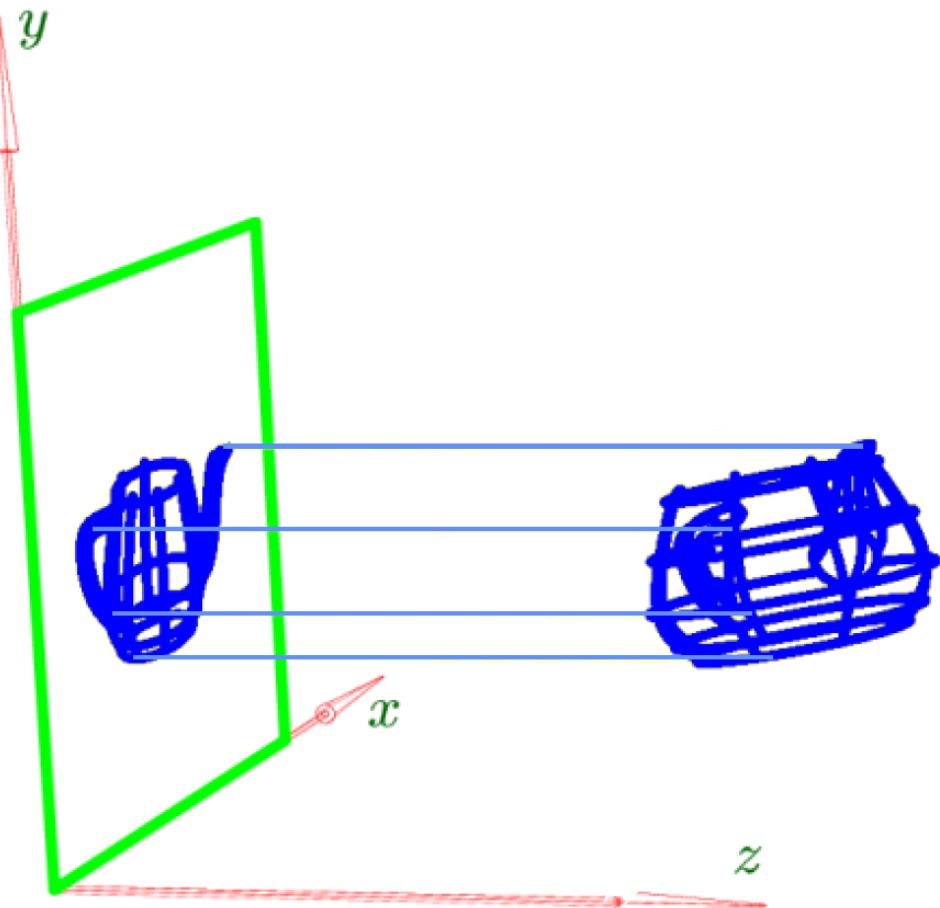


Projective Transformations

- What is wrong with this picture?

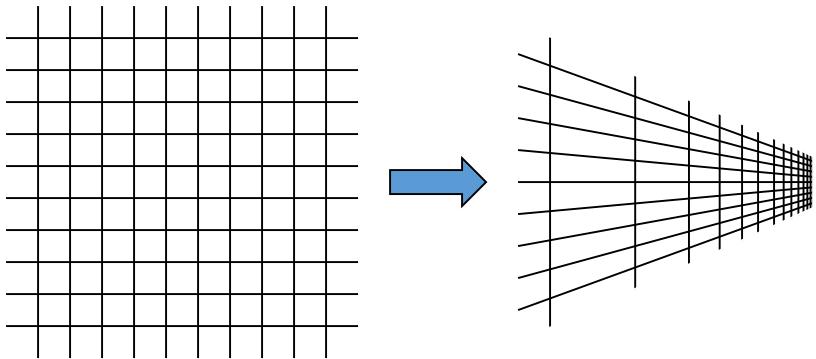



Projective Transformations

- Pinhole camera model

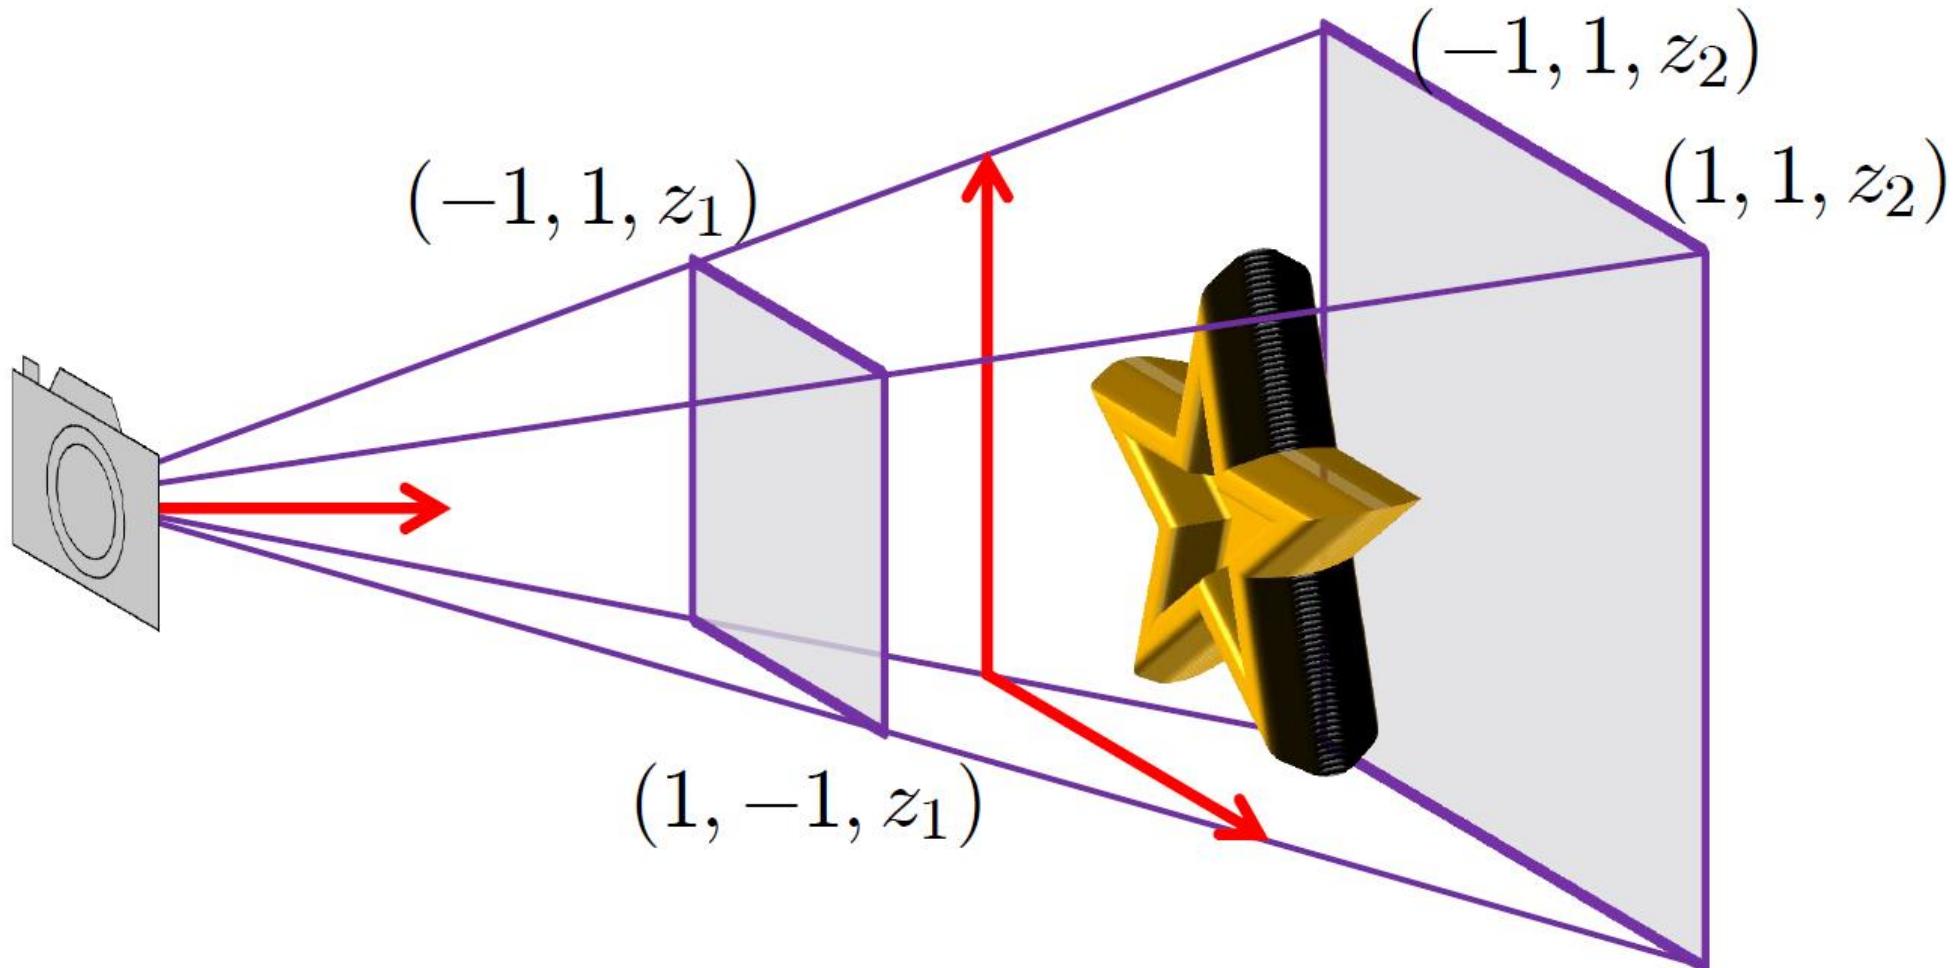

Projective Transformations


- Perspective Warp!

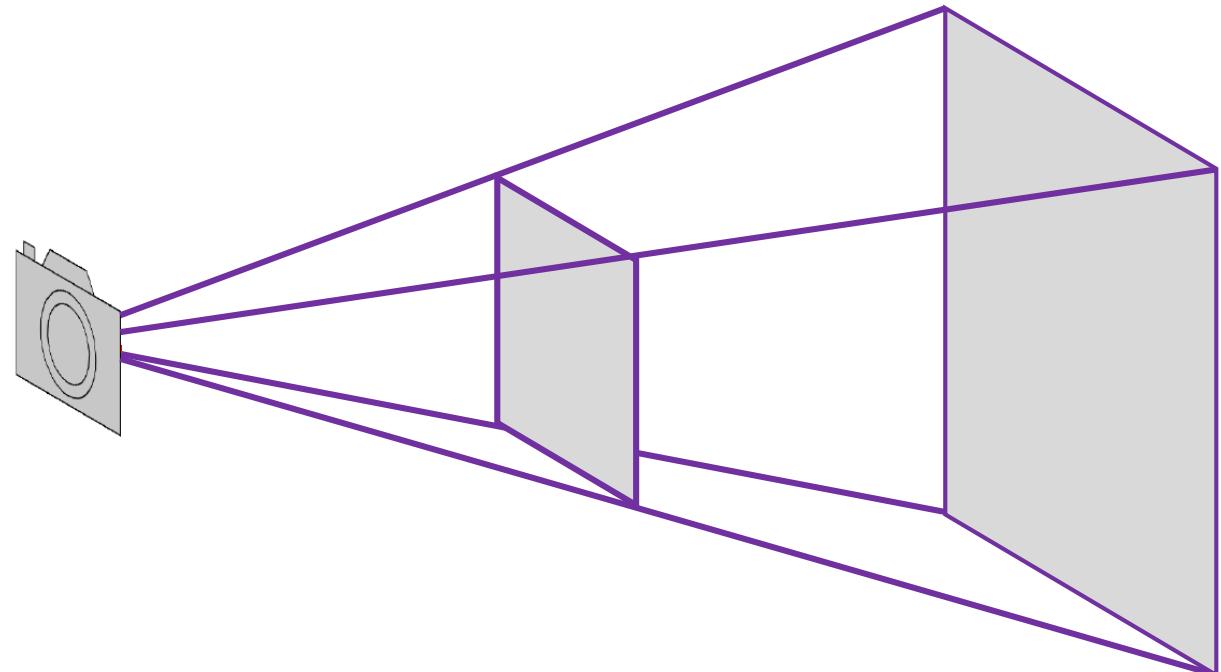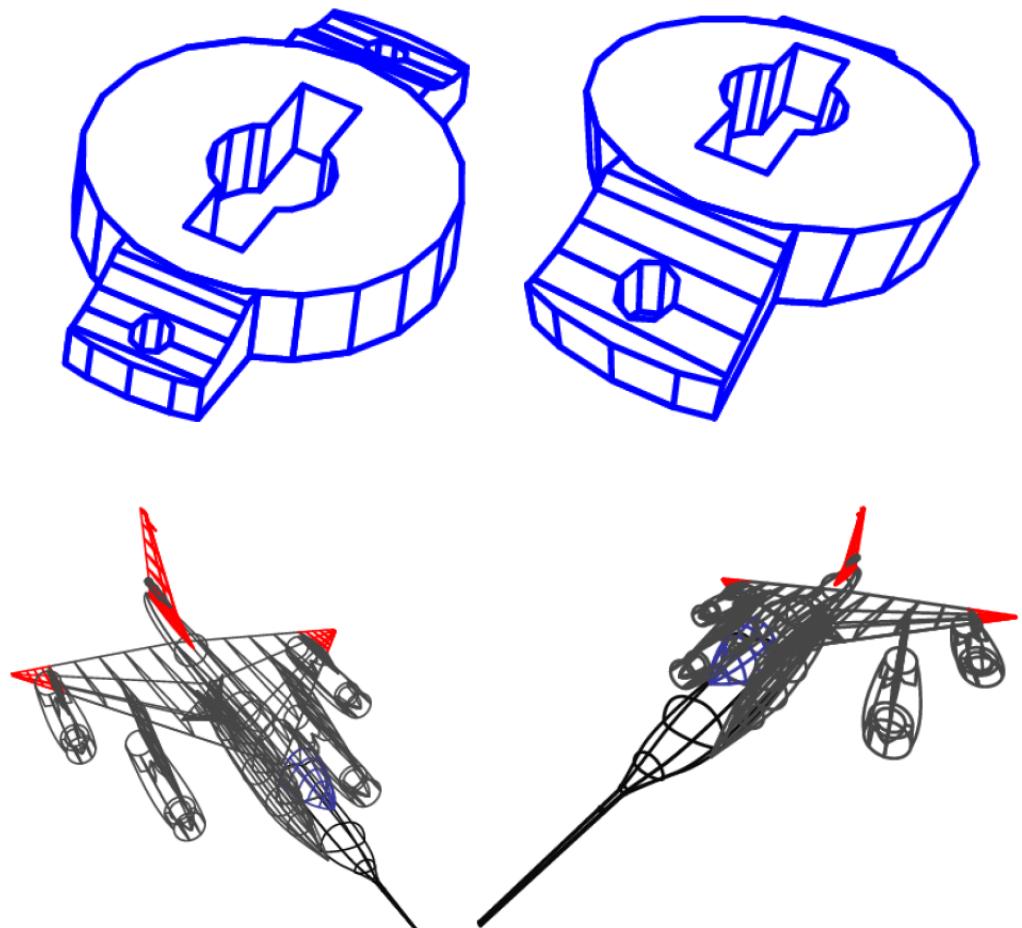

Projective Transformations

- OpenGL's version

$$\begin{pmatrix} \frac{2n}{w} & 0 & 0 & 0 \\ 0 & \frac{2n}{h} & 0 & 0 \\ 0 & 0 & -\frac{f+n}{f-n} & -\frac{2fn}{f-n} \\ 0 & 0 & -1 & 0 \end{pmatrix}$$

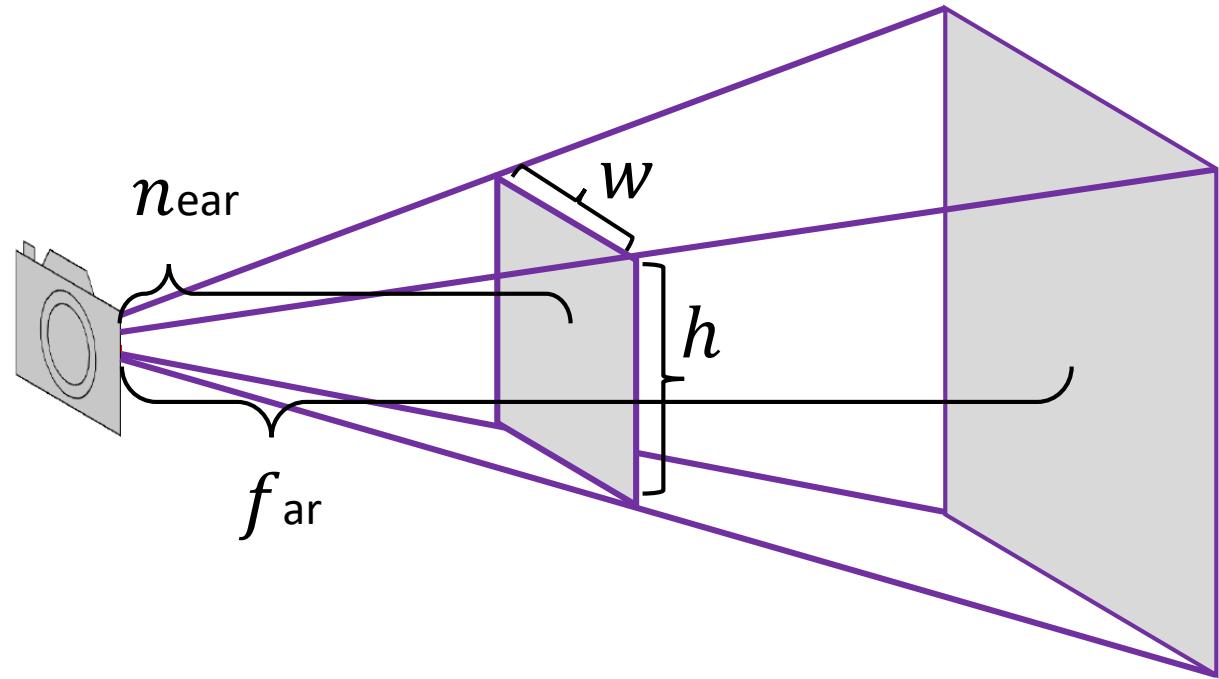

Demo: http://www.songho.ca/opengl/gl_transform.html

+





Projective Transformations

- Projective transformations (homographies):

- Affine transformations, and
- Projective warps


$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \end{bmatrix} \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

- Properties of projective transformations:

- Origin does not necessarily map to origin
- Point at infinity may map to finite point
- Lines map to lines
- Parallel lines do not necessarily remain parallel
- Ratios are not preserved
- Closed under composition

Projective Transformations


- Perspective warp in art
 - Julian Beever

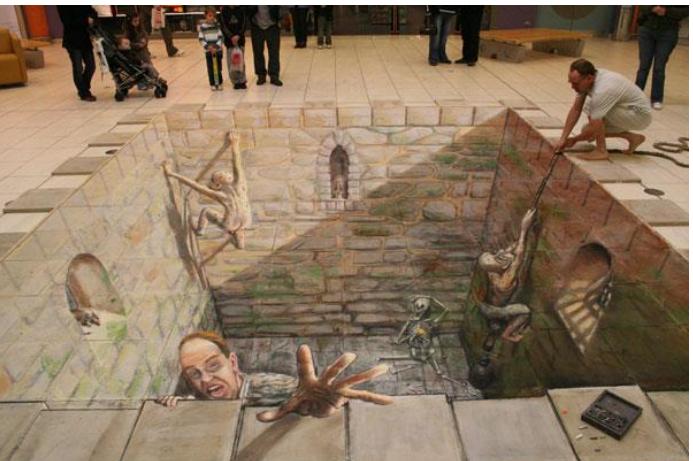



Projective Transformations

- Perspective warp in art
 - Julian Beever

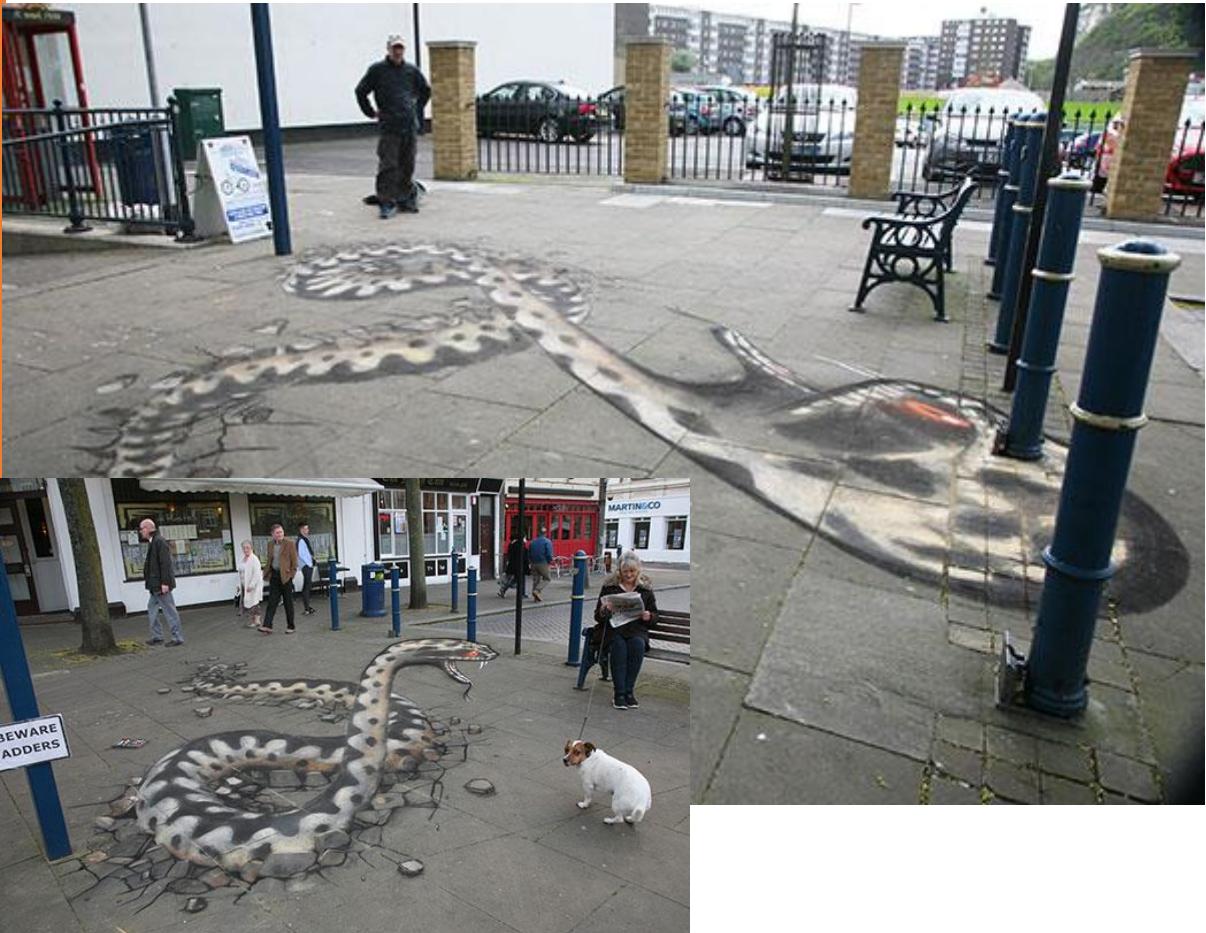



Overview

- Scene graphs
 - Geometry & attributes
 - Transformations
 - Bounding volumes
- Transformations
 - Basic 2D transformations
 - Matrix representation
 - Matrix composition
 - 3D transformations




Matrix Composition

- Transformations can be combined by matrix multiplication

$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \left(\begin{bmatrix} 1 & 0 & tx \\ 0 & 1 & ty \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos \Theta & -\sin \Theta & 0 \\ \sin \Theta & \cos \Theta & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} sx & 0 & 0 \\ 0 & sy & 0 \\ 0 & 0 & 1 \end{bmatrix} \right) \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

$\mathbf{p}' = T(tx, ty) R(\Theta) S(sx, sy) \mathbf{p}$

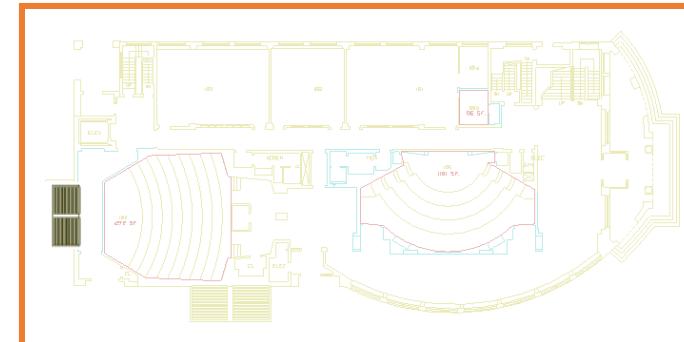




Matrix Composition

- Matrices are a convenient and efficient way to represent a sequence of transformations
 - General purpose representation
 - Hardware matrix multiply
 - Efficiency with premultiplication
 - Matrix multiplication is associative

$$\mathbf{p}' = (T * (R * (S * \mathbf{p})))$$
$$\mathbf{p}' = (T * R * S) * \mathbf{p}$$

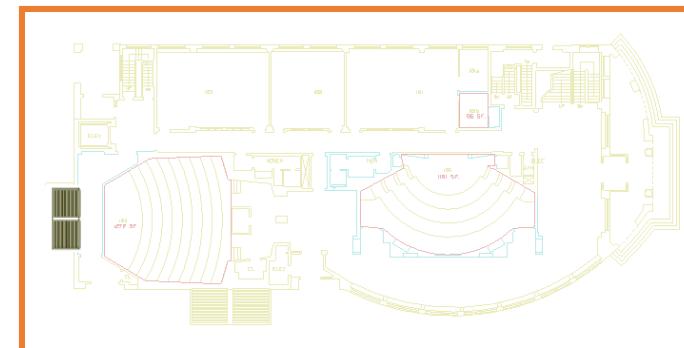




Matrix Composition

- Be aware: order of transformations matters
 - Matrix multiplication is **not** commutative

$$p' = T * R * S * p$$


$\xleftarrow{\hspace{1cm}}$ “Global” “Local”

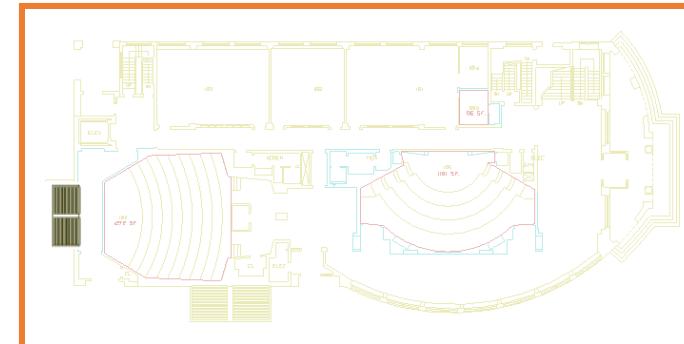




Matrix Composition

- Rotate by Θ around arbitrary point (a,b)

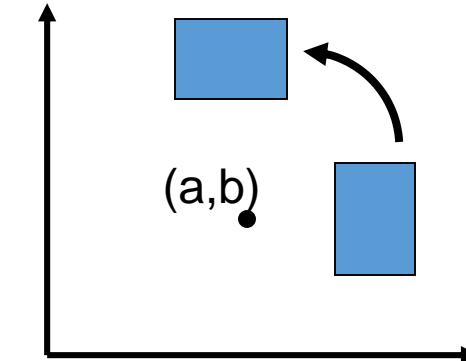

- Scale by s_x, s_y around arbitrary point (a,b)

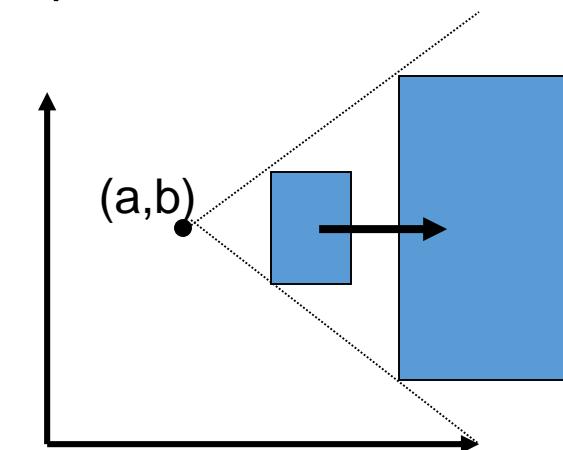



Overview

- Scene graphs
 - Geometry & attributes
 - Transformations
 - Bounding volumes
- Transformations
 - Basic 2D transformations
 - Matrix representation
 - Matrix composition
 - 3D transformations



3D Transformations

- Same idea as 2D transformations
 - Homogeneous coordinates: (x,y,z,w)
 - 4x4 transformation matrices

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} a & b & c & d \\ e & f & g & h \\ i & j & k & l \\ m & n & o & p \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$



Basic 3D Transformations

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Identity

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} sx & 0 & 0 & 0 \\ 0 & sy & 0 & 0 \\ 0 & 0 & sz & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Scale

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & tx \\ 0 & 1 & 0 & ty \\ 0 & 0 & 1 & tz \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Translation

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} -1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Mirror over X axis



Basic 3D Transformations

Rotate around Z axis:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} \cos \Theta & -\sin \Theta & 0 & 0 \\ \sin \Theta & \cos \Theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$



Rotate around Y axis:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} \cos \Theta & 0 & -\sin \Theta & 0 \\ 0 & 1 & 0 & 0 \\ \sin \Theta & 0 & \cos \Theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Rotate around X axis:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos \Theta & -\sin \Theta & 0 \\ 0 & \sin \Theta & \cos \Theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Transformations in Scene Graphs

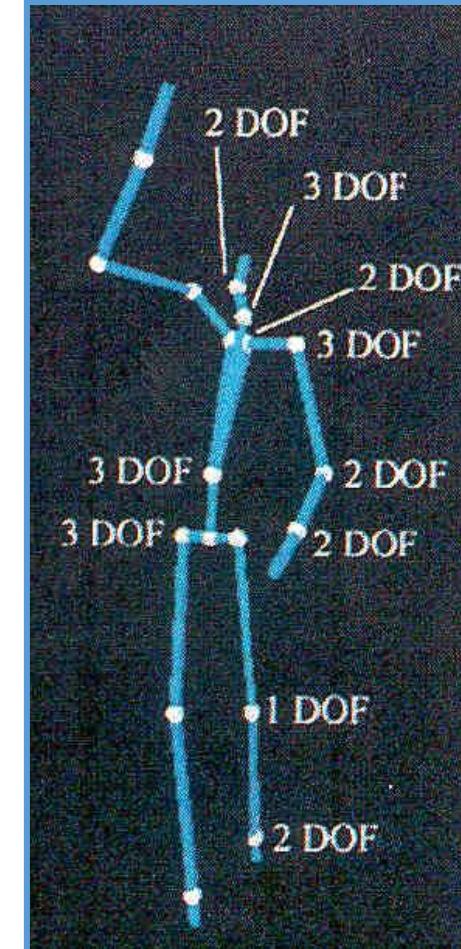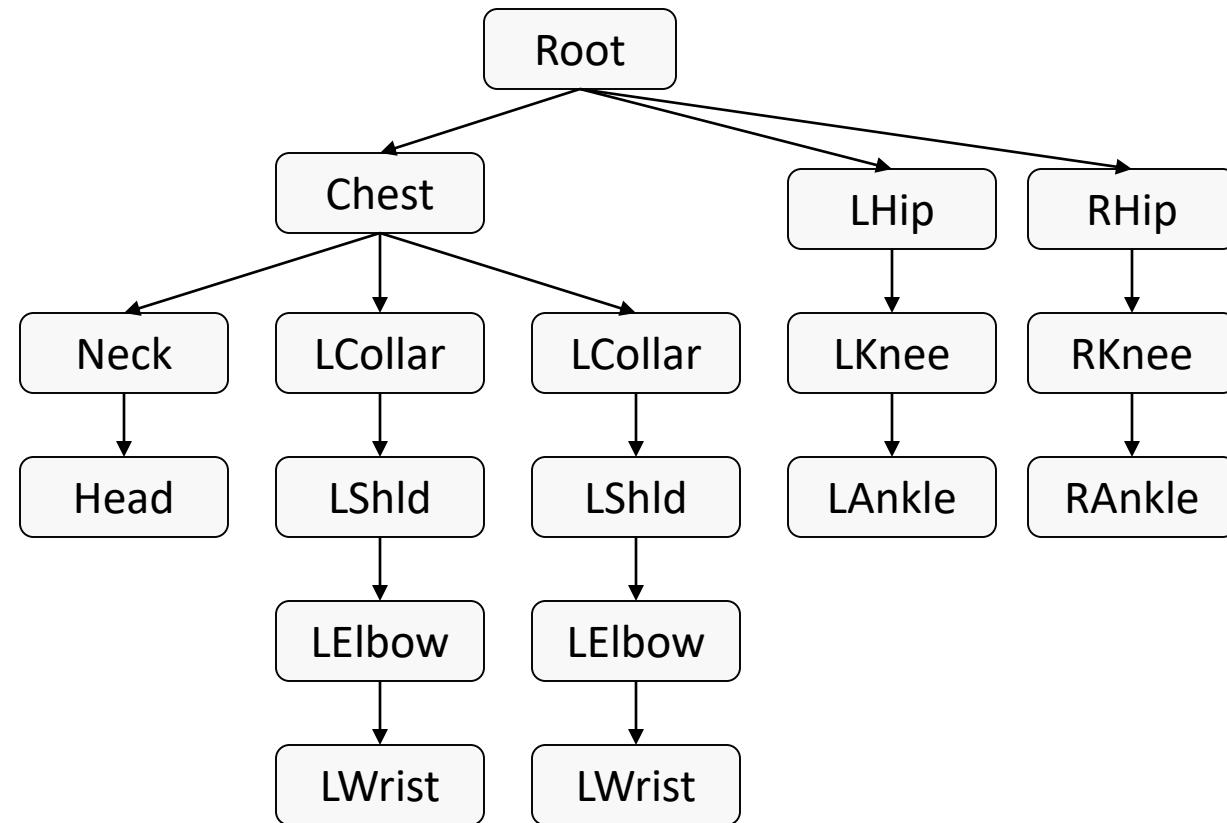

Rose et al. '96



Summary

- Scene graphs
 - Hierarchical
 - Modeling transformations
 - Bounding volumes
- Coordinate systems
 - World coordinates
 - Modeling coordinates
- 3D modeling transformations
 - Represent most transformations by 4x4 matrices
 - Composite with matrix multiplication (order matters)