

Concurrency in Go

Feb 2nd & 3rd 2022

Go Resources

<https://tour.golang.org/list>

<https://play.golang.org>

<https://gobyexample.com>

Outline

Two Synchronization Mechanisms

Locks

Channels

MapReduce


A Case Study of WordCount

Two synchronization mechanisms


Locks - limit access to a critical section

Channels - pass information across processes using a queue

Example: Bank Account

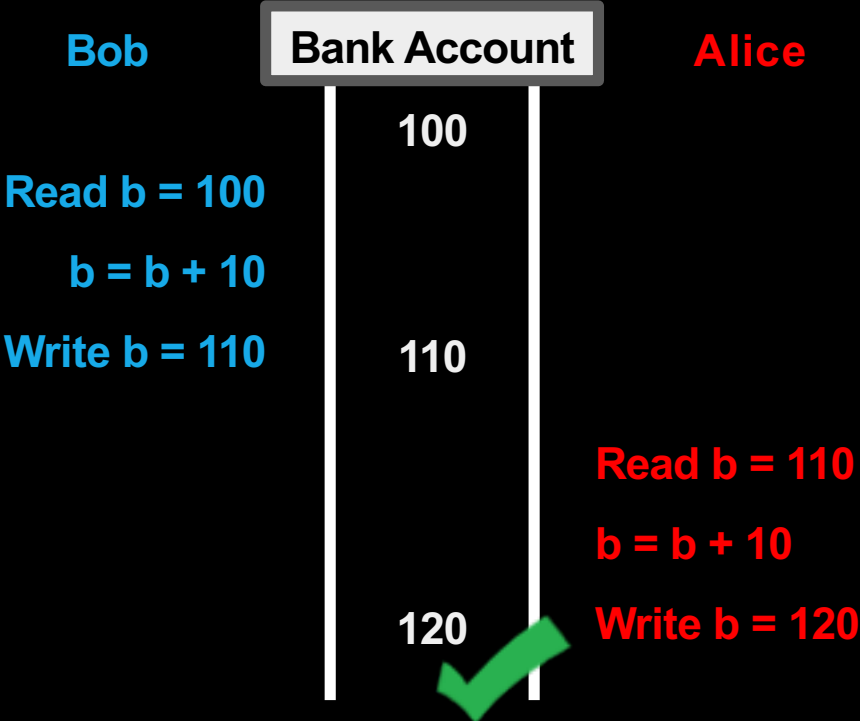

Example: Bank Account

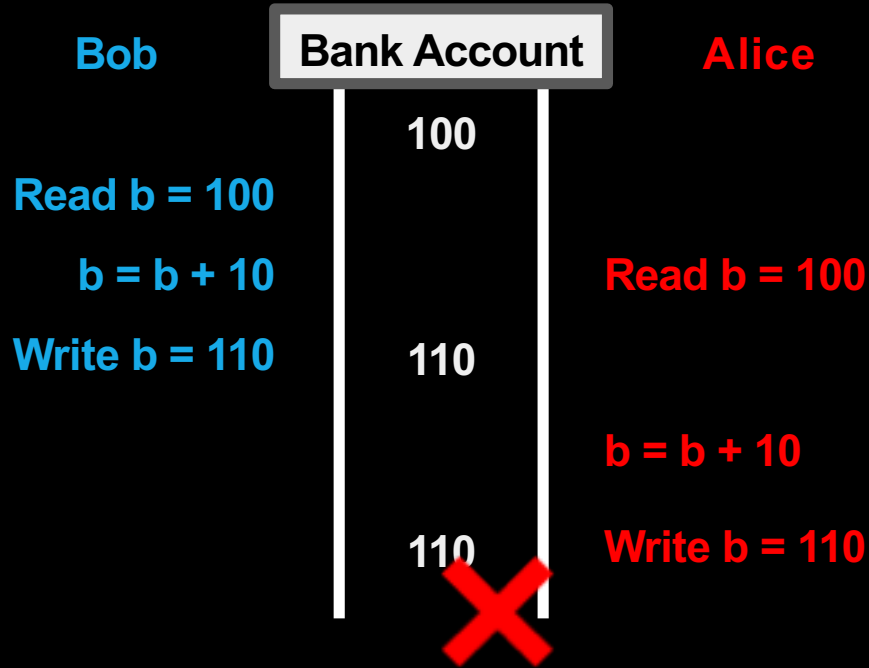

What went wrong?

Changes to balance are not *atomic*

```
func Deposit(amount) {  
    lock balanceLock  
    read balance  
    balance = balance + amount  
    write balance  
    unlock balanceLock  
}
```



Critical section

Locks in Go

```
package account
```

```
import "sync"
```

```
type Account struct {  
    balance int  
    lock sync.Mutex  
}
```

```
func NewAccount(init int) Account {  
    return Account{balance: init}  
}
```

```
func (a *Account) CheckBalance() int {  
    a.lock.Lock()  
    defer a.lock.Unlock()  
    return a.balance  
}
```

```
func (a *Account) Withdraw(v int) {  
    a.lock.Lock()  
    defer a.lock.Unlock()  
    a.balance -= v  
}
```

```
func (a *Account) Deposit(v int) {  
    a.lock.Lock()  
    defer a.lock.Unlock()  
    a.balance += v  
}
```


Read Write Locks in Go

```
package account
```

```
import "sync"
```

```
type Account struct {  
    balance int  
    lock sync.RWMutex  
}
```

```
func NewAccount(init int) Account {  
    return Account{balance: init}  
}
```

```
func (a *Account) CheckBalance() int {  
    a.lock.RLock()  
    defer a.lock.RUnlock()  
    return a.balance  
}
```

```
func (a *Account) Withdraw(v int) {  
    a.lock.Lock()  
    defer a.lock.Unlock()  
    a.balance -= v  
}
```


```
func (a *Account) Deposit(v int) {  
    a.lock.Lock()  
    defer a.lock.Unlock()  
    a.balance += v  
}
```

Two Solutions to the Same Problem

Locks:

Multiple threads can reference same memory location


Use lock to ensure only one thread is updating it at any given time

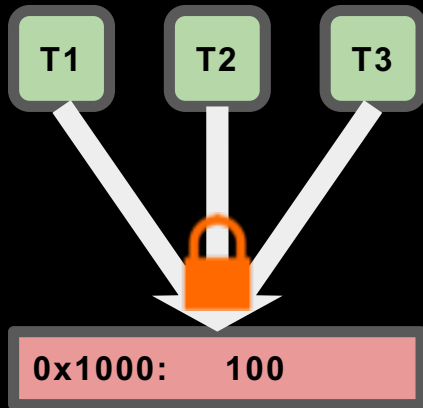

Channels:

Data item initially stored in channel

Threads must request item from channel, make updates, and return item to channel

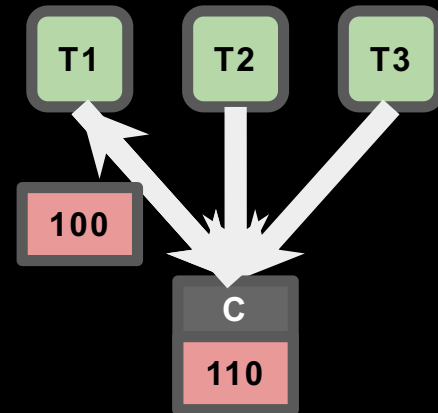

Go channels

Channels also allow us to safely communicate between **goroutines**

```
result := make(chan int, numWorkers)

// Launch workers
for i := 0; i < numWorkers; i++ {
    go func() {
        // ... do some work

        result <- i
    }()
}

// Wait until all worker threads have finished
for i := 0; i < numWorkers; i++ {
    handleResult(<-result)
}
fmt.Println("Done!")
```

Go channels

Easy to express
asynchronous RPC

```
result := make(chan int, numServers)

// Send query to all servers
for i := 0; i < numServers; i++ {
    go func() {
        resp := // ... send RPC to server

        result <- resp
    }()
}

// Return as soon as the first server responds
handleResponse(<-result)
```

Bank Account Code (using channels)

```
package account

type Account struct {
// Fill in Here
}

func NewAccount(init int) Account {
// Fill in Here
}

func (a *Account) CheckBalance() int {
// What goes Here?
}

func (a *Account) Withdraw(v int) {
// ???
}

func (a *Account) Deposit(v int) {
// ???
}
```

Bank Account Code (using channels)

```
package account

type Account struct {
    balance chan int
}

func NewAccount(init int) Account {
    a := Account{make(chan int, 1)}
    a.balance <- init
    return a
}
```

```
func (a *Account) CheckBalance() int {
    // What goes Here?
}

func (a *Account) Withdraw(v int) {
    // ???
}

func (a *Account) Deposit(v int) {
    // ???
}
```

Bank Account Code (using channels)

```
package account
```

```
type Account struct {  
    balance chan int  
}
```

```
func NewAccount(init int) Account {  
    a := Account{make(chan int, 1)}  
    a.balance <- init  
    return a  
}
```

```
func (a *Account) CheckBalance() int {  
    bal := <-a.balance  
    a.balance <- bal  
    return bal  
}
```

```
func (a *Account) Withdraw(v int) {  
    // ???  
}
```

```
func (a *Account) Deposit(v int) {  
    //???  
}
```

Bank Account Code (using channels)

```
package account
```

```
type Account struct {  
    balance chan int  
}
```

```
func NewAccount(init int) Account {  
    a := Account{make(chan int, 1)}  
    a.balance <- init  
    return a  
}
```

```
func (a *Account) CheckBalance() int {  
    bal := <-a.balance  
    a.balance <- bal  
    return bal  
}
```

```
func (a *Account) Withdraw(v int) {  
    bal := <-a.balance  
    a.balance <- (bal - v)  
}
```

```
func (a *Account) Deposit(v int) {  
    //???  
}
```


Bank Account Code (using channels)

```
package account
```

```
type Account struct {  
    balance chan int  
}
```

```
func NewAccount(init int) Account {  
    a := Account{make(chan int, 1)}  
    a.balance <- init  
    return a  
}
```

```
func (a *Account) CheckBalance() int {  
    bal := <-a.balance  
    a.balance <- bal  
    return bal  
}
```

```
func (a *Account) Withdraw(v int) {  
    bal := <-a.balance  
    a.balance <- (bal - v)  
}
```

```
func (a *Account) Deposit(v int) {  
    bal := <-a.balance  
    a.balance <- (bal + v)  
}
```

Select statement

`select` allows a goroutine to wait on multiple channels at once

```
for {
    select {
        case money := <-dad:
            buySnacks(money)
        case money := <-mom:
            buySnacks(money)
    }
}
```

Select statement

`select` allows a goroutine to wait on multiple channels at once

```
for {
    select {
        case money := <-dad:
            buySnacks(money)
        case money := <-mom:
            buySnacks(money)
        case default:
            starve()
            time.Sleep(5 * time.Second)
    }
}
```

Handle timeouts using select

```
result := make(chan int)
timeout := make(chan bool)

// Asynchronously request an
// answer from server, timing
// out after X seconds
askServer(result, timeout)

// Wait on both channels
select {
case res := <-result:
    handleResult(res)
case <-timeout:
    fmt.Println("Timeout!")
}

func askServer(
    result chan int,
    timeout chan bool) {
    // Start timer
    go func() {
        time.Sleep(5 * time.Second)
        timeout <- true
    }()

    // Ask server
    go func() {
        response := // ... send RPC
        result <- response
    }()
}
```

Handle timeouts using select

```
result := make(chan int)
timeout := make(chan bool)

// Asynchronously request an
// answer from server, timing
// out after X seconds
askServer(result, timeout)

// Wait on both channels
select {
case res := <-result:
    handleResult(res)
case <-timeout:
    fmt.Println("Timeout!")
}
```

```
func askServer(
    result chan int,
    timeout chan bool) {
    // Start timer
    go func() {
        time.Sleep(5 * time.Second)
        timeout <- true
    }()

    // Ask server
    go func() {
        response := // ... send RPC
        result <- response
    }()
}
```

Exercise: Implementing a mutex using channels

```
type Lock struct {  
    // ???  
}  
  
func NewLock() Lock {  
    // ???  
}  
  
func (l *Lock) Lock() {  
    // ???  
}  
  
func (l *Lock) Unlock() {  
    // ???  
}
```

Exercise: Implementing a mutex using channels

```
type Lock struct {  
    ch chan bool  
}  
  
func NewLock() Lock {  
    // ???  
}  
  
func (l *Lock) Lock() {  
    // ???  
}  
  
func (l *Lock) Unlock() {  
    // ???  
}
```

Exercise: Implementing a mutex using channels

```
type Lock struct {
  ch chan bool
}

func NewLock() Lock {
  l := Lock{make(chan bool, 1)}
  l.ch <- true
  return l
}

func (l *Lock) Lock() {
  // ???
}

func (l *Lock) Unlock() {
  // ???
}
```


Exercise: Implementing a mutex using channels

```
type Lock struct {
  ch chan bool
}

func NewLock() Lock {
  l := Lock{make(chan bool, 1)}
  l.ch <- true
  return l
}

func (l *Lock) Lock() {
  <-l.ch
}

func (l *Lock) Unlock() {
  // ???
}
```

Exercise: Implementing a mutex using channels

```
type Lock struct {
  ch chan bool
}

func NewLock() Lock {
  l := Lock{make(chan bool, 1)}
  l.ch <- true
  return l
}

func (l *Lock) Lock() {
  <-l.ch
}

func (l *Lock) Unlock() {
  l.ch <- true
}
```

Outline

Two synchronization mechanisms

Locks


Channels

MapReduce

A Case Study of WordCount

Application: WordCount

How much wood would a woodchuck chuck if a woodchuck could chuck wood?

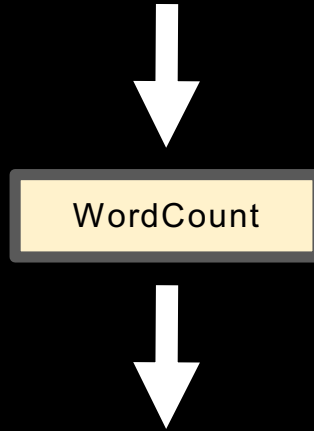

how: 1, much: 1, wood: 2, would: 1, a: 2, woodchuck: 2, chuck: 2, if: 1, could: 1

Application: WordCount

Locally: Tokenize and store words in a hash map

How do you parallelize this?

Split document by half

Build two hash maps, one for each half

How do you do this in a distributed environment?



When in the Course of human events, it becomes necessary for one people to dissolve the political bands which have connected them with another, and to assume, among the Powers of the earth, the separate and equal station to which the Laws of Nature and of Nature's God entitle them, a decent respect to the opinions of mankind requires that they should declare the causes which impel them to the separation.

Input document



When in the Course of human events, it becomes necessary for one people to

dissolve the political bands which have connected them with another, and to assume,

among the Powers of the earth, the separate and equal station to which the Laws of

Nature and of Nature's God entitle them, a decent respect to the opinions of mankind

requires that they should declare the causes which impel them to the separation.

Partition



requires that they
should declare the
causes which impel them
to the separation.

When in the Course of
human events, it
becomes necessary for
one people to




Nature and of Nature's
God entitle them, a
decent respect to the
opinions of mankind

dissolve the political
bands which have
connected them with
another, and to assume,

among the Powers of the
earth, the separate and
equal station to which
the Laws of

requires: 1, that: 1,
they: 1, should: 1,
declare: 1, the: 1,
causes: 1, which: 1 ...

when: 1, in: 1,
the: 1, course: 1,
of: 1, human: 1,
events: 1, it: 1



nature: 2, and: 1, of: 2,
god: 1, entitle: 1, them: 1,
decent: 1, respect: 1,
mankind: 1, opinion: 1 ...

dissolve: 1, the: 2,
political: 1, bands: 1,
which: 1, have: 1,
connected: 1, them: 1 ...

among: 1, the: 2,
powers: 1, of: 2, earth:
1, separate: 1, equal:
1, and: 1 ...

Compute word counts locally

when: 1, in: 1,
the: 1, course: 1,
of: 1, human: 1,
events: 1, it: 1

requires: 1, that: 1,
they: 1, should: 1,
declare: 1, the: 1,
causes: 1, which: 1 ...



nature: 2, and: 1, of: 2,
god: 1, entitle: 1, them: 1,
decent: 1, respect: 1,

Now ...

How to merge results?

Compute word counts locally

Merging results computed locally

Several options

Don't merge — requires additional computation for correct results

Send everything to one node — what if data is too big? Too slow...

Partition key space among nodes in cluster (e.g. [a-e], [f-j], [k-p] ...)

1. Assign a key space to each node
2. Split local results by the key spaces
- 3.

requires: 1, that: 1,
they: 1, should: 1,
declare: 1, the: 1,
causes: 1, which: 1 ...

when: 1, in: 1,
the: 1, course: 1,
of: 1, human: 1,
events: 1, it: 1



nature: 2, and: 1, of: 2,
god: 1, entitle: 1, them: 1,
decent: 1, respect: 1,
mankind: 1, opinion: 1 ...

dissolve: 1, the: 2,
political: 1, bands: 1,
which: 1, have: 1,
connected: 1, them: 1 ...

among: 1, the: 2,
powers: 1, of: 2, earth:
1, separate: 1, equal:
1, and: 1 ...

[a-e]

[f-j]


[k-p]

[q-s]

[t-z]

when: 1, the: 1,
in: 1, it: 1, human: 1,
course: 1, events: 1,
of: 1

causes: 1, declare: 1,
requires: 1, should: 1,
that: 1, they: 1, the: 1,
which: 1

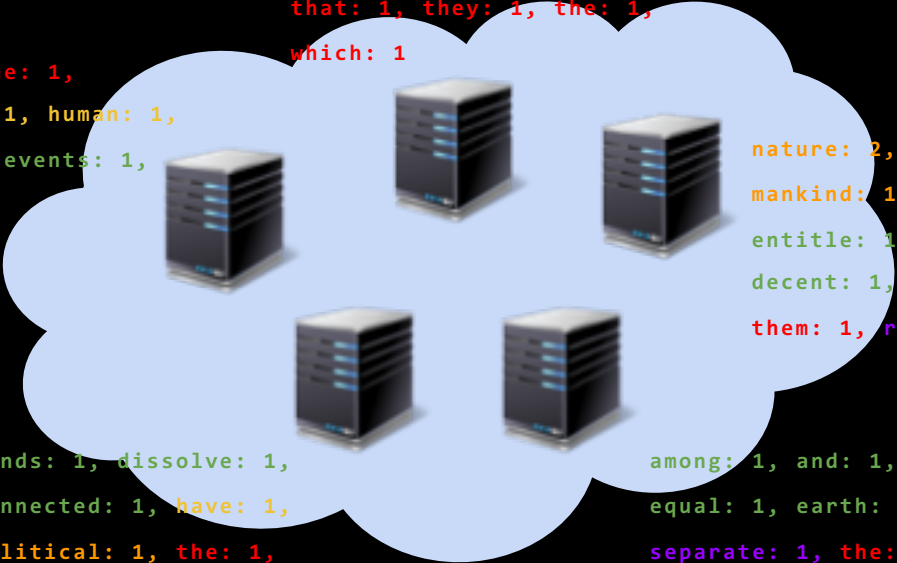


nature: 2, of: 2,
mankind: 1, opinion: 1,
entitle: 1, and: 1,
decent: 1, god: 1,
them: 1, respect: 1,

bands: 1, dissolve: 1,
connected: 1, have: 1,
political: 1, the: 1,
them: 1, which: 1

among: 1, and: 1,
equal: 1, earth: 1,
separate: 1, the: 2,
powers: 1, of: 2

Split local results by key space

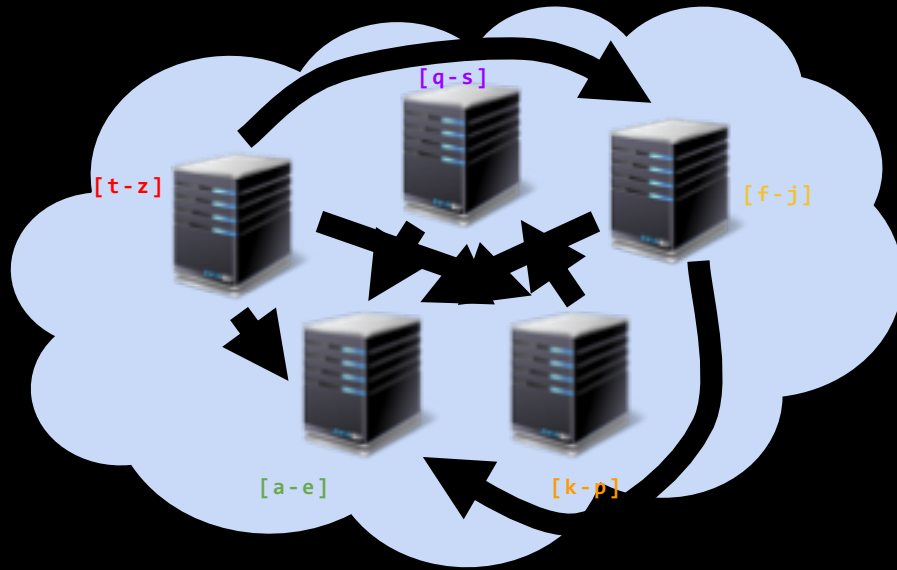

All-to-all shuffle

[a-e]

[f-j]

[k-p]

[q-s]

[t-z]


when: 1, the: 1, that: 1,
they: 1, the: 1, which: 1,
them: 1, the: 2, the: 1,
them: 1, which: 1

requires: 1, should: 1,
respect: 1, separate: 1


god: 1, have: 1,
in: 1, it: 1,
human: 1,

bands: 1, dissolve: 1,
connected: 1, course: 1,
events: 1, among: 1, and: 1,
equal: 1, earth: 1, entitle: 1,
and: 1, decent: 1, causes: 1,
declare: 1

powers: 1, of: 2,
nature: 2, of: 2,
mankind: 1, of: 1,
opinion: 1, political:

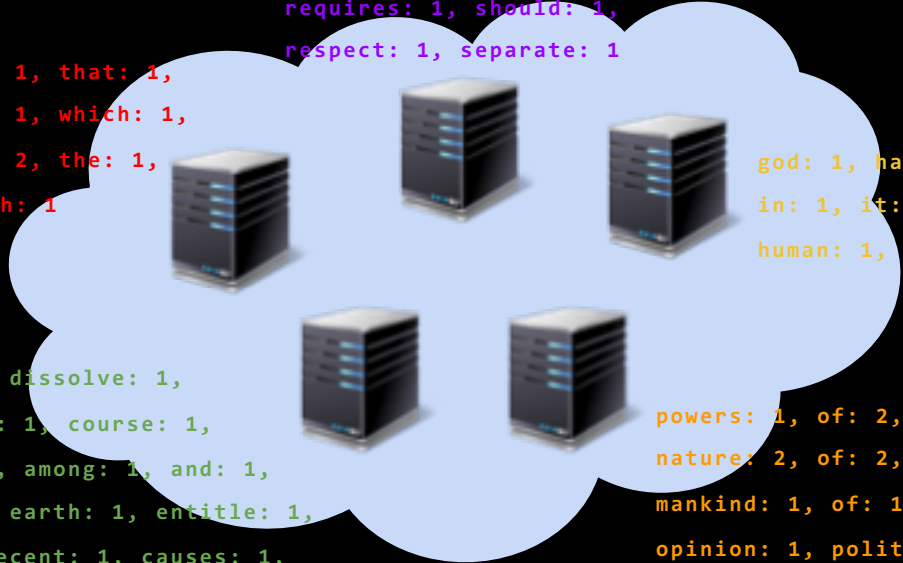

Note the duplicates...

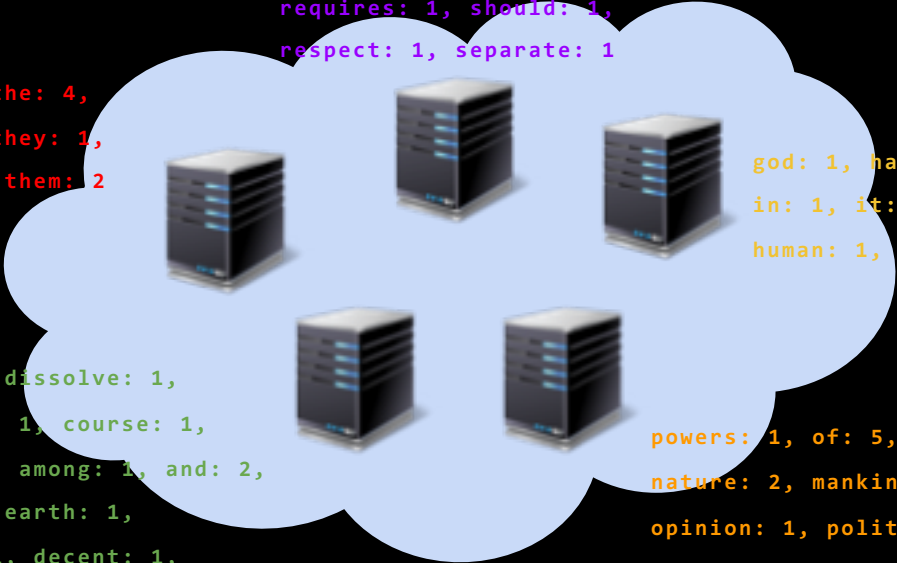

requires: 1, should: 1,
respect: 1, separate: 1

when: 1, the: 4,
that: 1, they: 1,
which: 2, them: 2

god: 1, have: 1,
in: 1, it: 1,
human: 1,

bands: 1, dissolve: 1,
connected: 1, course: 1,
events: 1, among: 1, and: 2,
equal: 1, earth: 1,
entitle: 1, decent: 1,
causes: 1, declare: 1

powers: 1, of: 5,
nature: 2, mankind: 1,
opinion: 1, political: 1

Merge results received from other nodes

MapReduce

Partition dataset into many chunks

Map stage: Each node processes one or more chunks locally

Reduce stage:

MapReduce Interface

map(key, value) -> list(<k', v'>)

Apply function to (key, value) pair

Outputs list of intermediate pairs

reduce(key, list<value>) -> <k', v'>

Applies aggregation function to values

MapReduce: WordCount

```
map(key, value) :
```

```
// key = document name
```

```
// value = document contents
```

```
    for each word w in value:
```

```
        emit (w, 1)
```

```
reduce(key, values) :
```


```
// key = the word
```

```
// values = number of occurrences of that word
```

```
count = sum(values)
```

```
emit (key, count)
```

MapReduce: WordCount

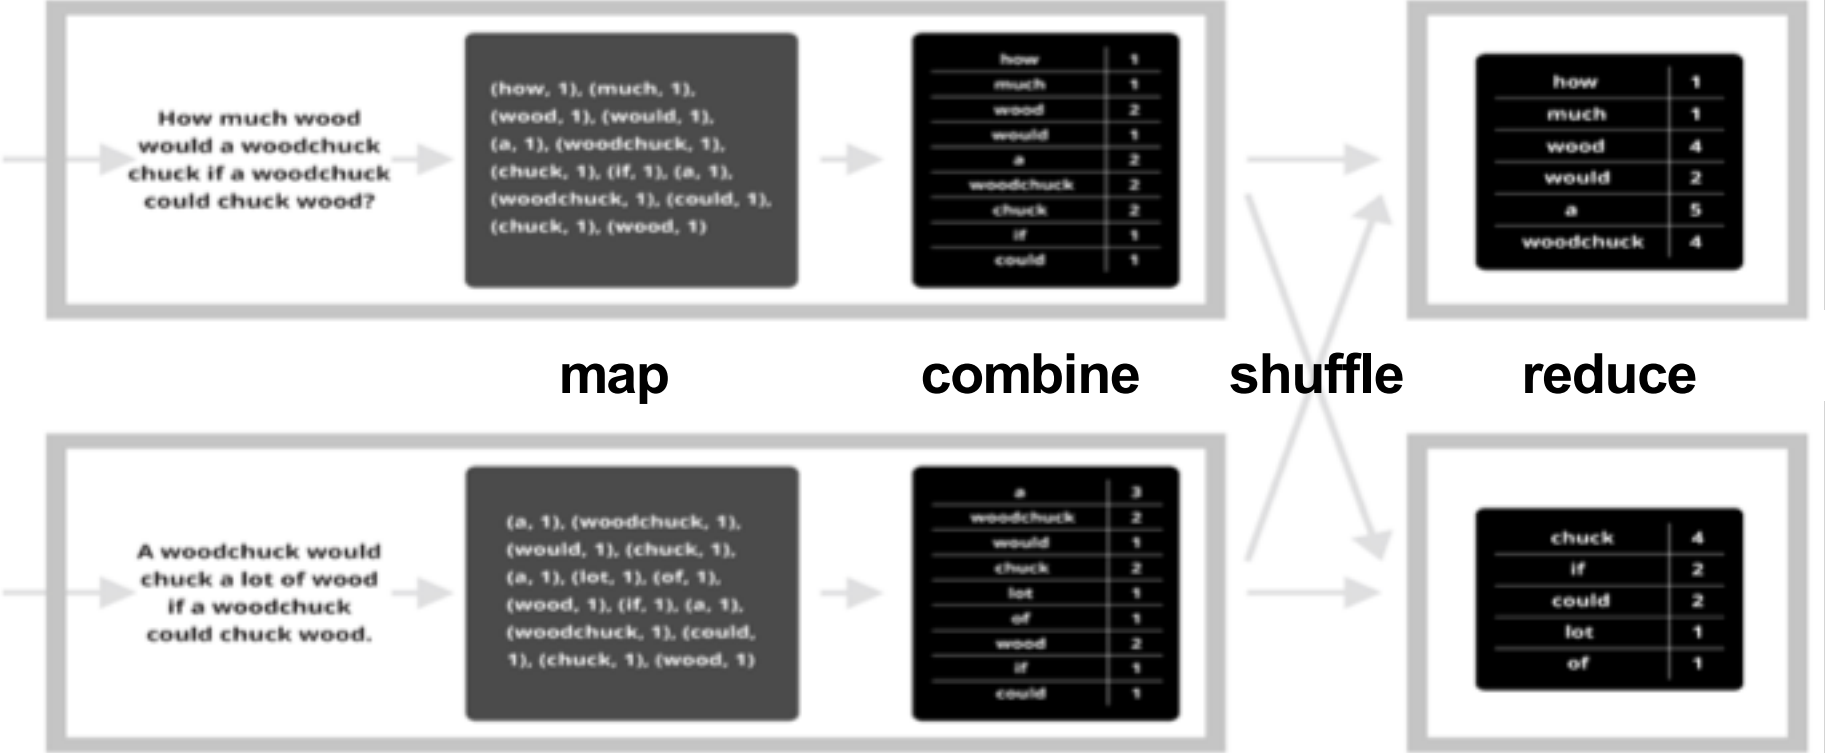

Why is this hard?

Failure is common

Even if each machine is available $p = 99.999\%$ of the time, a datacenter with $n = 100,000$ machines still encounters failures $(1-p^n) = 63\%$ of the time

Data skew causes unbalanced performance across cluster

Problems occur at scale

MapReduce



2004


2007



Dryad



2011



2015



Google Dataflow




Assignment 1.1 is due 2/3

Assignment 1.2 is due 2/8

Assignment 1.3 is due 2/10

Sequential MapReduce

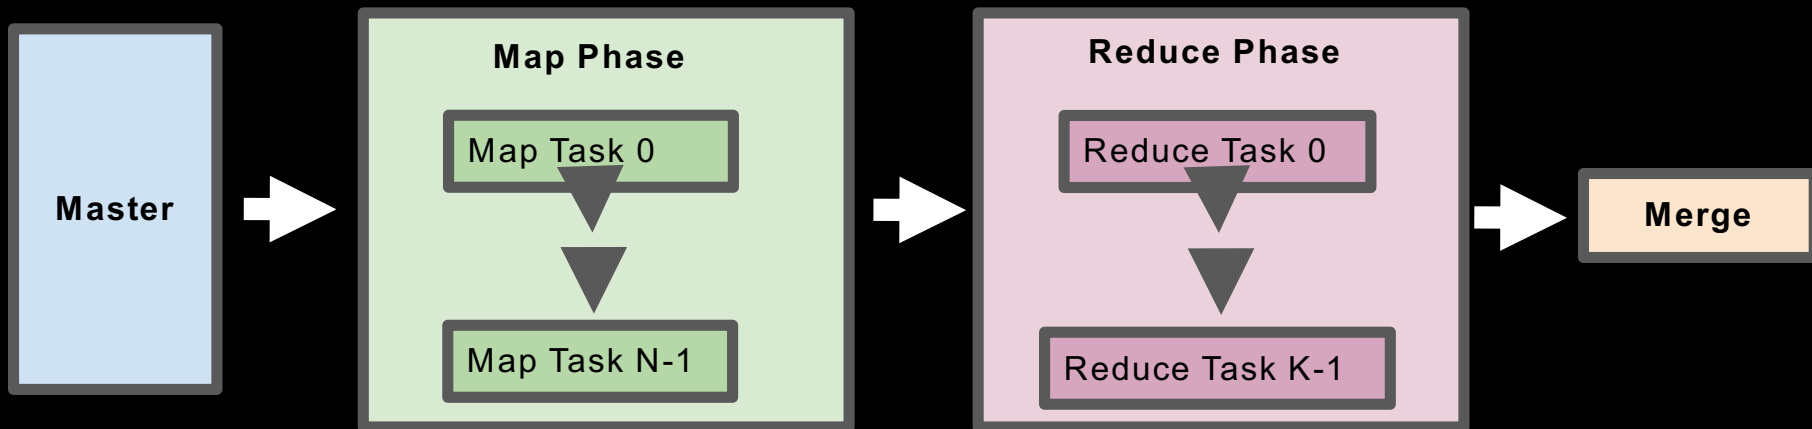

Distributed MapReduce

