

Hashing in Networked Systems

COS 461: Computer Networks
Spring 2011

Mike Freedman

http://www.cs.princeton.edu/courses/archive/spring11/cos461/


Hashing

Hash function

- Function that maps a large, possibly variable-sized datum into a small datum, often a single integer that serves to index an associative array
- In short: maps n-bit datum into k buckets (k << 2ⁿ)
- Provides time- & space-saving data structure for lookup

Main goals:

- Low cost
- Deterministic
- Uniformity (load balanced)

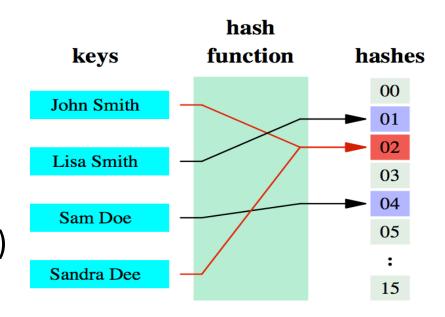

Today's outline

Uses of hashing


- Equal-cost multipath routing in switches
- Network load balancing in server clusters
- Per-flow statistics in switches (QoS, IDS)
- Caching in cooperative CDNs and P2P file sharing
- Data partitioning in distributed storage services

Various hashing strategies

- Modulo hashing
- Consistent hashing
- Bloom Filters

Uses of Hashing

Equal-cost multipath routing (ECMP)

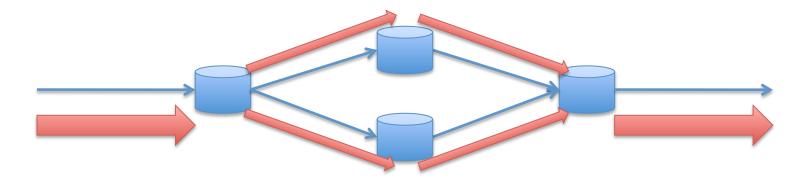


ECMP

 Multipath routing strategy that splits traffic over multiple paths for load balancing

Why not just round-robin packets?

- Reordering (lead to triple duplicate ACK in TCP?)
- Different RTT per path (for TCP RTO)...
- Different MTUs per path


Equal-cost multipath routing (ECMP)

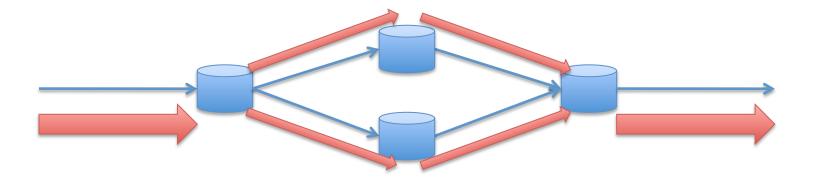

Path-selection via hashing

- # buckets = # outgoing links
- Hash network information (source/dest IP addrs) to select outgoing link: preserves flow affinity

Now: ECMP in datacenters

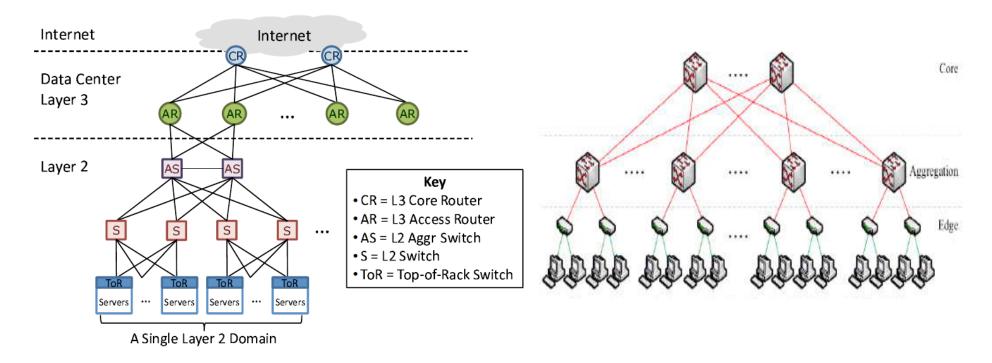

Datacenter networks are multi-rooted tree

- Goal: Support for 100,000s of servers
- Recall Ethernet spanning tree problems: No loops
- L3 routing and ECMP: Take advantage of multiple paths


Network load balancing

- Goal: Split requests evenly over k servers
 - Map new flows to any server
 - Packets of existing flows continue to use same server

3 approaches

- Load balancer terminates TCP, opens own connection to server
- Virtual IP / Dedicated IP (VIP/DIP) approaches
 - One global-facing virtual IP represents all servers in cluster
 - Hash client's network information (source IP:port)
 - NAT approach: Replace virtual IP with server's actual IP
 - Direct Server Return (DSR)

Load balancing with DSR

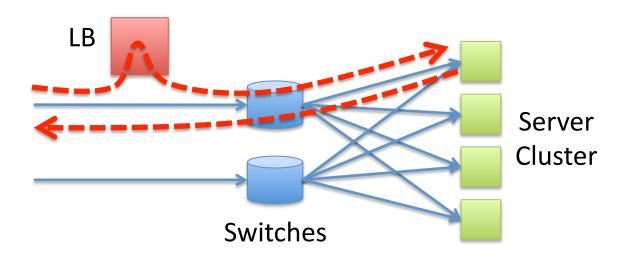


- Servers bind to both virtual and dedicated IP
- Load balancer just replaces dest MAC addr
- Server sees client IP, responds directly
 - Packet in reverse direction do not pass through load balancer
 - Greater scalability, particularly for traffic with assymmetric bandwidth (e.g., HTTP GETs)

Per-flow state in switches


- Switches often need to maintain connection records or per-flow state
 - Quality-of-service for flows
 - Flow-based measurement and monitoring
 - Payload analysis in Intrusion Detection Systems (IDSs)
- On packet receipt:
 - Hash flow information (packet 5-tuple)
 - Perform lookup if packet belongs to known flow
 - Otherwise, possibly create new flow entry
 - Probabilistic match (false positives) may be okay

Cooperative Web CDNs

- Tree-like topology of cooperative web caches
 - Check local
 - If miss, check siblings / parent
- One approach
 - Internet Cache Protocol (ICP)
 - UDP-based lookup, short timeout
- Alternative approach
 - A priori guess is siblings/children have content
 - Nodes share hash table of cached content with parent / siblings
 - Probabilistic check (false positives) okay, as actual ICP lookup to neighbor could just return false



Hash tables in P2P file-sharing

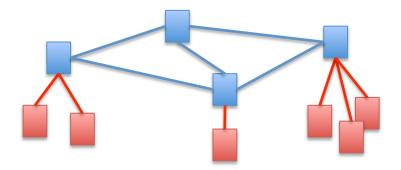

- Two-layer network (e.g., Gnutella, Kazaa)
 - Ultrapeers are more stable, not NATted, higher bandwidth
 - Leaf nodes connect with 1 or more ultrapeers
- Ultrapeers handle content searchers
 - Leaf nodes send hash table of content to ultrapeers
 - Search requests flooded through ultrapeer network
 - When ultrapeer gets request, checks hash tables of its children for match

Data partitioning

- Network load balancing: All machines are equal
- Data partitioning: Machines store different content
- Non-hash-based solution
 - "Directory" server maintains mapping from O(entries) to machines (e.g., Network file system, Google File System)
 - Named data can be placed on any machine
- Hash-based solution
 - Nodes maintain mappings from O(buckets) to machines
 - Data placed on the machine that owns the name's bucket

Examples of data partitioning


Akamai

- 1000 clusters around Internet, each >= 1 servers
- Hash (URL's domain) to map to one server
- Akamai DNS aware of hash function, returns machine that
 - 1. is in geographically-nearby cluster
 - 2. manages particular customer domain

Memcached (Facebook, Twitter, ...)

- Employ k machines for in-memory key-value caching
- On read:
 - Check memcache
 - If miss, read data from DB, write to memcache
- On write: invalidate cache, write data to DB

How Akamai Works – Already Cached

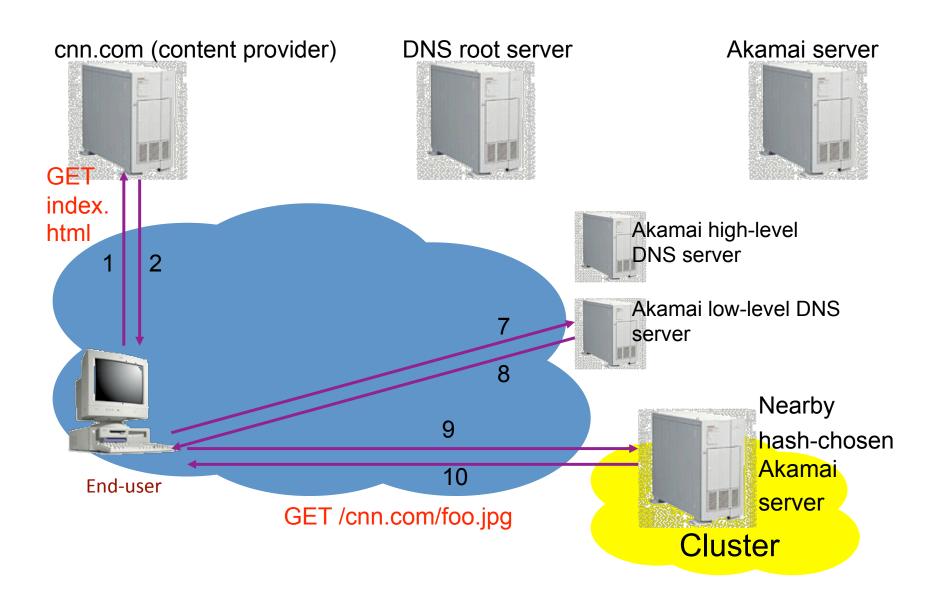

Hashing Techniques


Basic Hash Techniques

- Simple approach for uniform data
 - If data distributed uniformly over N, for N >> n
 - Hash fn = <data> mod n
 - Fails goal of uniformity if data not uniform
- Non-uniform data, variable-length strings
 - Typically split strings into blocks
 - Perform rolling computation over blocks
 - CRC32 checksum
 - Cryptographic hash functions (SHA-1 has 64 byte blocks)

Applying Basic Hashing


- Consider problem of data partition:
 - Given document X, choose one of k servers to use
- Suppose we use modulo hashing
 - Number servers 1..k
 - Place X on server $i = (X \mod k)$
 - Problem? Data may not be uniformly distributed
 - Place X on server $i = hash(X) \mod k$
 - Problem?
 - What happens if a server fails or joins $(k \rightarrow k\pm 1)$?
 - What is different clients has different estimate of k?
 - Answer: All entries get remapped to new nodes!

Consistent Hashing

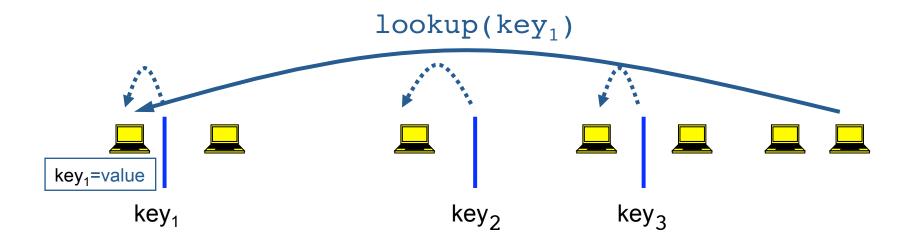

- Consistent hashing partitions key-space among nodes
- Contact appropriate node to lookup/store key
 - Blue node determines red node is responsible for key₁
 - Blue node sends lookup or insert to red node

Consistent Hashing

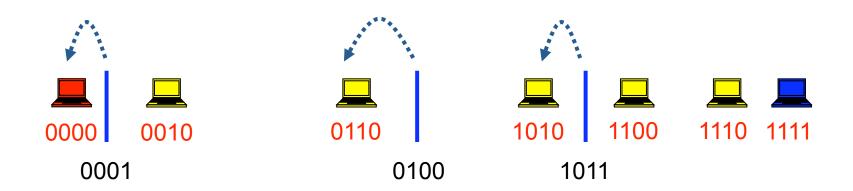

Partitioning key-space among nodes

Nodes choose random identifiers:
 e.g., hash(IP)


Keys randomly distributed in ID-space:
 e.g., hash(URL)

- Keys assigned to node "nearest" in ID-space
- Spreads ownership of keys evenly across nodes

Consistent Hashing

Construction

- Assign C hash buckets to random points on mod 2^n circle; hash key size = n
- Map object to random position on circle
- Hash of object = closest clockwise bucket




Desired features

- Balanced: No bucket has disproportionate number of objects
- Smoothness: Addition/removal of bucket does not cause movement among existing buckets (only immediate buckets)
- Spread and load: Small set of buckets that lie near object


Bloom Filters

- Data structure for probabilistic membership testing
 - Small amount of space, constant time operations
 - False positives possible, no false negatives
 - Useful in per-flow network statistics, sharing information between cooperative caches, etc.
- Basic idea using hash fn's and bit array
 - Use k independent hash functions to map item to array
 - If all array elements are 1, it's present. Otherwise, not

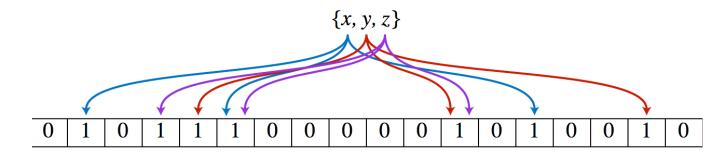


Bloom Filters


Start with an *m* bit array, filled with 0s.




To insert, hash each item k times. If $H_i(x) = a$, set Array[a] = 1.



To check if y is in set, check array at $H_i(y)$. All k values must be 1.



Possible to have a false positive: all *k* values are 1, but *y* is not in set.



Today's outline

Uses of hashing

- Equal-cost multipath routing in switches
- Network load balancing in server clusters
- Per-flow statistics in switches (QoS, IDS)
- Caching in cooperative CDNs and P2P file sharing
- Data partitioning in distributed storage services

Various hashing strategies

- Modulo hashing
- Consistent hashing
- Bloom Filters